

## SMD ■ MID Power LED

### 50-217S/KKE-BXXXX32Z6/SZM/2T

**MTC V.3**

4000K 26Lm 指定使用 HC1025 芯片,  
4000K 28Lm 指定使用 HC1128 芯片,  
4000K 30Lm 使指定用 HC1734 芯片  
4000K 32Lm 使指定用 SA2235 芯片

### Features

- PLCC-2 package
- Top view white LED
- High luminous intensity output
- Wide viewing angle
- Pb-free
- ANSI Binning
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br<900ppm,Cl<900ppm,Br+Cl<1500ppm)

### Description

The Everlight 50-217S package has high efficacy, high CRI, low power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

### Applications

- General lighting
- Decorative and Entertainment Lighting
- Indicators
- Illumination
- Switch lights


## 50-217S/KKE-BXXXX32Z6/SZM/2T

### MTC 改版歷史

版本	修改內容	改版日期
1	初版制定	2019.05.05
2	增加 4000K 32lm 規格	2019.06.06
<b>3</b>	<b>4000K 32lm 規格增加 2.7-2.8V 電壓檔</b>	<b>2019.07.05</b>

**Product Number Explanation**

**50-217S / K KE -B XX XX XX Z6 / SZM/2T**

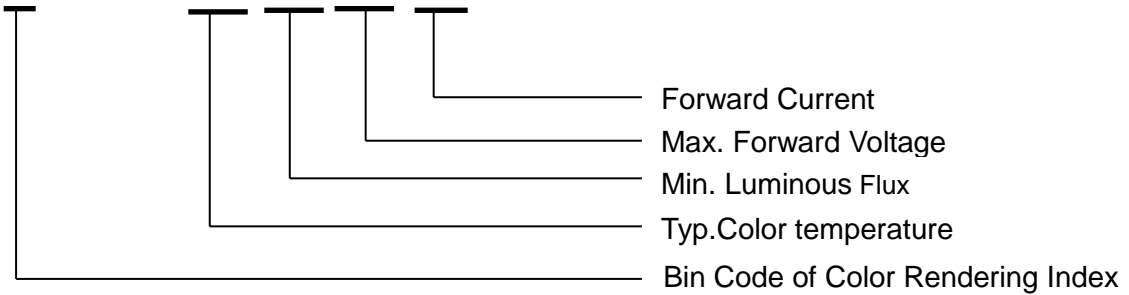

**Table of Color Rendering Index**

Symbol	Description
M	CRI(Min.) : 60
N	CRI(Min.) : 65
L	CRI(Min.) : 70
Q	CRI(Min.) : 75
K	CRI(Min.) : 80
P	CRI(Min.) : 85
H	CRI(Min.) : 90

Note:  
 Tolerance of Color Rendering Index: -1~+3

**Table of Forward Current Index**

Symbol	Description
Z6	I <sub>F</sub> :60mA

**Table of Forward Voltage Index**

Symbol	Description
32	3.2V max

Example:  
 50-217S/KKE-B402632Z6/SZM/2T

CRI	80.5(Min.)
CCT	4000K
Flux	26lm min
V <sub>F</sub>	3.2V max
I <sub>F</sub>	60mA

## Mass Production List

### Series For 4000K 26Lm

	Product	CRI Min. <sup>(1)</sup>	R9 Min. <sup>(1)</sup>	CCT(K)	Φ(lm) Min. <sup>(2)</sup>
<b>S10C015823</b>	50-217S/KKE-B302432Z6/SZM/2T	80	0	3000K	24
<b>S10C015824</b>	50-217S/KKE-B352432Z6/SZM/2T	80	0	3500K	24
<b>S10C015825</b>	50-217S/KKE-B402632Z6/SZM/2T	80	0	4000K	26
<b>S10C015826</b>	50-217S/KKE-B432632Z6/SZM/2T	80	0	4300K	26
<b>S10C015827</b>	50-217S/KKE-B502632Z6/SZM/2T	80	0	5000K	26
<b>S10C015828</b>	50-217S/KKE-B572632Z6/SZM/2T	80	0	5700K	26
<b>S10C015829</b>	50-217S/KKE-B632632Z6/SZM/2T	80	0	6300K	26
<b>S10C015830</b>	50-217S/KKE-B652632Z6/SZM/2T	80	0	6500K	26

### Series For 4000K 28Lm

	Product	CRI Min. <sup>(1)</sup>	R9 Min. <sup>(1)</sup>	CCT(K)	Φ(lm) Min. <sup>(2)</sup>
<b>S10C015831</b>	50-217S/KKE-B302632Z6/SZM/2T	80	0	3000K	26
<b>S10C015832</b>	50-217S/KKE-B352632Z6/SZM/2T	80	0	3500K	26
<b>S10C015833</b>	50-217S/KKE-B402832Z6/SZM/2T	80	0	4000K	28
<b>S10C015834</b>	50-217S/KKE-B432832Z6/SZM/2T	80	0	4300K	28
<b>S10C015835</b>	50-217S/KKE-B502832Z6/SZM/2T	80	0	5000K	28
<b>S10C015836</b>	50-217S/KKE-B572832Z6/SZM/2T	80	0	5700K	28
<b>S10C015837</b>	50-217S/KKE-B632832Z6/SZM/2T	80	0	6300K	28
<b>S10C015838</b>	50-217S/KKE-B652832Z6/SZM/2T	80	0	6500K	28

### Series For 4000K 30Lm

	Product	CRI Min. <sup>(1)</sup>	R9 Min. <sup>(1)</sup>	CCT(K)	Φ(lm) Min. <sup>(2)</sup>
<b>S10C015839</b>	50-217S/KKE-B302832Z6/SZM/2T	80	0	3000K	28
<b>S10C015840</b>	50-217S/KKE-B352832Z6/SZM/2T	80	0	3500K	28
<b>S10C015841</b>	50-217S/KKE-B403032Z6/SZM/2T	80	0	4000K	30
<b>S10C015842</b>	50-217S/KKE-B433032Z6/SZM/2T	80	0	4300K	30
<b>S10C015843</b>	50-217S/KKE-B503032Z6/SZM/2T	80	0	5000K	30
<b>S10C015844</b>	50-217S/KKE-B573032Z6/SZM/2T	80	0	5700K	30
<b>S10C015845</b>	50-217S/KKE-B633032Z6/SZM/2T	80	0	6300K	30
<b>S10C015846</b>	50-217S/KKE-B653032Z6/SZM/2T	80	0	6500K	30

Series For 4000K 32Lm

	Product	CRI Min. <sup>(1)</sup>	R9 Min. <sup>(1)</sup>	CCT(K)	Φ(lm) Min. <sup>(2)</sup>
<b>S10C015949</b>	50-217S/KKE-B303032Z6/SZM/2T	80	0	3000K	30
<b>S10C015950</b>	50-217S/KKE-B353032Z6/SZM/2T	80	0	3500K	30
<b>S10C015951</b>	50-217S/KKE-B403232Z6/SZM/2T	80	0	4000K	32
<b>S10C015952</b>	50-217S/KKE-B433232Z6/SZM/2T	80	0	4300K	32
<b>S10C015953</b>	50-217S/KKE-B503232Z6/SZM/2T	80	0	5000K	32
<b>S10C015954</b>	50-217S/KKE-B573232Z6/SZM/2T	80	0	5700K	32
<b>S10C015955</b>	50-217S/KKE-B633232Z6/SZM/2T	80	0	6300K	32
<b>S10C015956</b>	50-217S/KKE-B653232Z6/SZM/2T	80	0	6500K	32

Notes:

1. Tolerance of Color Rendering Index: -1~+3
2. Tolerance of Luminous flux: ±5%.
3. 亮度和色點(x, y)出貨值以工廠對校深圳辦的標準進行調整後生產。
4. 4000K 26Lm 指定使用 HC1025 芯片, 4000K 28Lm 指定使用 HC1128 芯片, 4000K 30Lm 使指定用 HC1734 芯片, 4000K 32Lm 使指定用 SA2235 芯片

## Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	Cool White Neutral White Warm White	Water Clear

## Absolute Maximum Ratings (T<sub>Soldering</sub>=25°C)

Parameter	Symbol	Rating	Unit
Forward Current	I <sub>F</sub>	75	mA
Peak Forward Current (Duty 1/10 @10ms)	I <sub>FP</sub>	150	mA
Power Dissipation	P <sub>d</sub>	250	mW
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C
Thermal Resistance (Junction / Soldering point)	R <sub>th J-S</sub>	32	°C/W
Junction Temperature	T <sub>j</sub>	115	°C
Soldering Temperature	T <sub>sol</sub>	Reflow Soldering : 260 °C for 5sec. Hand Soldering : 350 °C for 3 sec.	

Note:

The products are sensitive to static electricity and must be carefully taken when handling products

## Electro-Optical Characteristics (T<sub>Soldering</sub>=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux <sub>(1)</sub>	Φ	24	-----	-----	lm	I <sub>F</sub> =60mA
Forward Voltage <sub>(2)</sub>	V <sub>F</sub>	2.7	-----	3.2	V	I <sub>F</sub> =60mA
Color Rendering Index <sub>(3)</sub>	R <sub>a</sub>	80	-----	-----		I <sub>F</sub> =60mA
	R <sub>9</sub>	0	-----	-----		I <sub>F</sub> =60mA
Viewing Angle	2θ <sub>1/2</sub>	-----	120	-----	deg	I <sub>F</sub> =60mA
Reverse Current	I <sub>R</sub>	-----	-----	1	μA	V <sub>R</sub> =5V

Notes:

1. Tolerance of Luminous flux: ±5%.
2. Tolerance of Forward Voltage: ±0.05V.
3. Tolerance of Color Rendering Index: -1~+3

5. 亮度和色點(x, y)出貨值以工廠對校深圳辦的標準進行調整後生產。



### Bin Range of Luminous Flux

Bin Code	Min.	Max.	Unit	Condition
2426	24	26	lm	I <sub>F</sub> =60mA
2628	26	28		
2830	28	30		
3032	30	32		
3234	32	34		
3436	34	36		
3638	36	38		

Note:

Tolerance of Luminous flux: ±5%.

亮度和色點(x, y)出貨值以工廠對校深圳辦的標準進行調整後生產。

### Bin Range of Forward Voltage

#### Series For 4000K 26Lm

Group	Bin Code	Min.	Max.	Unit	Condition
2832	35	2.8	2.9	V	I <sub>F</sub> =60mA
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		

#### Series For 4000K 28Lm

Group	Bin Code	Min.	Max.	Unit	Condition
2832	35	2.8	2.9	V	I <sub>F</sub> =60mA
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		

#### Series For 4000K 30Lm

Group	Bin Code	Min.	Max.	Unit	Condition
2832	35	2.8	2.9	V	I <sub>F</sub> =60mA
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		




Series For 4000K 32Lm

Group	Bin Code	Min.	Max.	Unit	Condition
2732	34	2.7	2.8	V	I <sub>F</sub> =60mA
	35	2.8	2.9		
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		

Note:

Tolerance of Forward Voltage:  $\pm 0.05V$ .


**The C.I.E. 1931 Chromaticity Diagram  
 3000K**

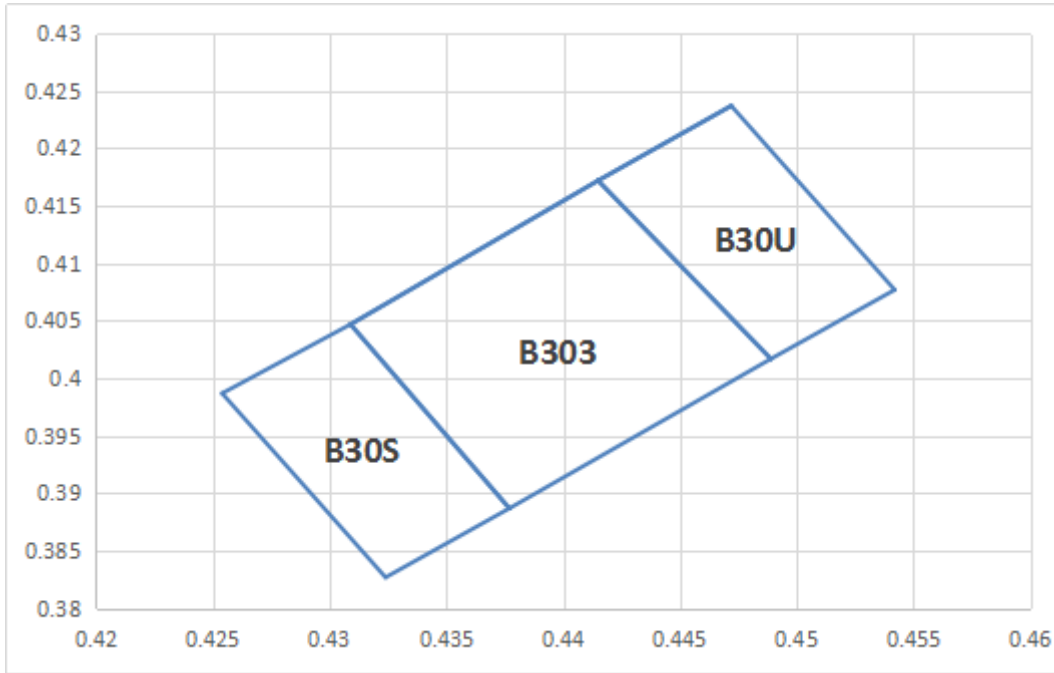

**Bin Range of Chromaticity Coordinates**

坐标点								
B30U	0.4472	0.4237	B303	0.4415	0.4172	B30S	0.4309	0.4047
	0.4415	0.4172		0.4309	0.4047		0.4254	0.3987
	0.4489	0.4017		0.4377	0.3887		0.4324	0.3827
	0.4542	0.4077		0.4489	0.4017		0.4377	0.3887
	0.4472	0.4237		0.4415	0.4172		0.4309	0.4047
配BIN 方案: B30S: B30U=1:1								


The C.I.E. 1931 Chromaticity Diagram  
3500K

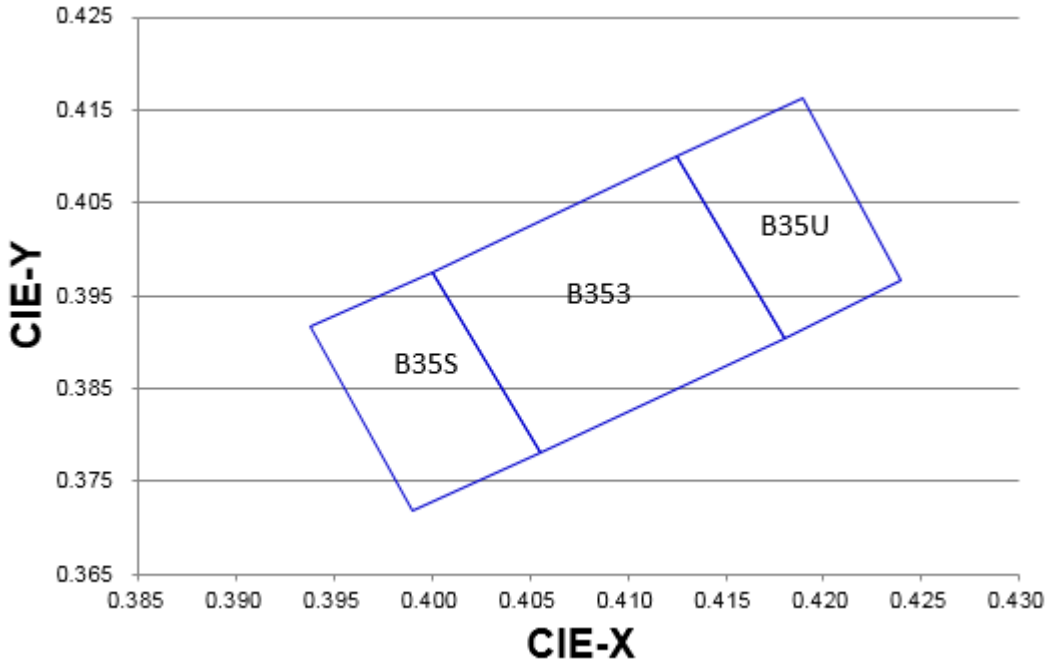

Bin Range of Chromaticity Coordinates

坐标点								
B35U	0.413	0.41	B353	0.406	0.378	B35S	0.406	0.378
	0.418	0.391		0.4	0.398		0.4	0.398
	0.424	0.397		0.413	0.41		0.394	0.392
	0.419	0.416		0.418	0.391		0.399	0.372
	0.413	0.41		0.406	0.378		0.406	0.378
配 BIN 方案: B35S: B35U=1:1								


**The C.I.E. 1931 Chromaticity Diagram  
 4000K**

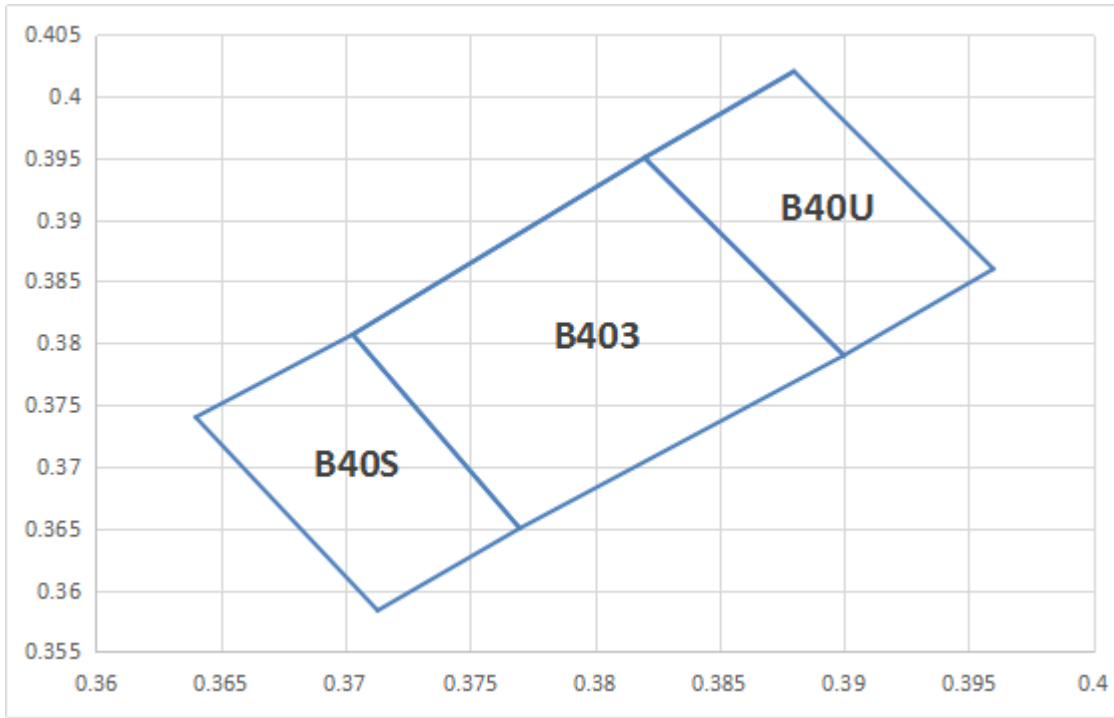

**Bin Range of Chromaticity Coordinates**

坐标点								
B40U	0.388	0.402	B403	0.382	0.395	B40S	0.3703	0.3807
	0.382	0.395		0.3703	0.3807		0.364	0.374
	0.39	0.379		0.377	0.365		0.3713	0.3584
	0.396	0.386		0.39	0.379		0.377	0.365
	0.388	0.402		0.382	0.395		0.3703	0.3807
配 BIN 方案: B40S: B40U=1:1								


The C.I.E. 1931 Chromaticity Diagram  
4300K

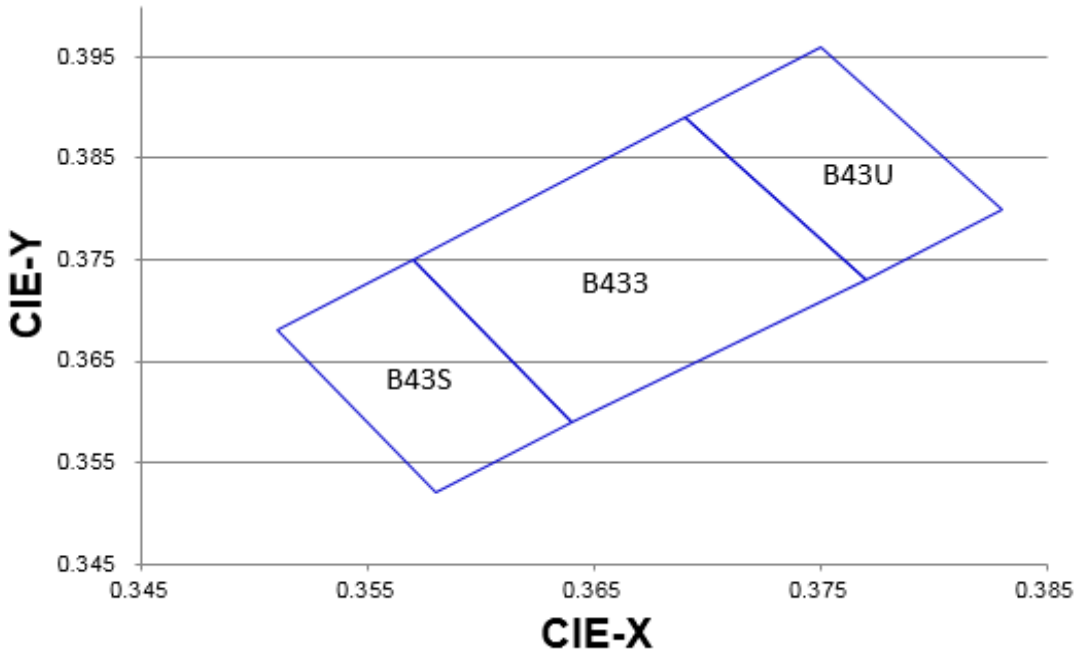

Bin Range of Chromaticity Coordinates

坐标点								
B43U	0.375	0.396	B433	0.369	0.389	B43S	0.357	0.375
	0.369	0.389		0.357	0.375		0.351	0.368
	0.377	0.373		0.364	0.359		0.358	0.352
	0.383	0.38		0.377	0.373		0.364	0.359
	0.375	0.396		0.369	0.389		0.357	0.375
配 BIN 方案: B43S: B43U=1:1								


The C.I.E. 1931 Chromaticity Diagram  
5000K

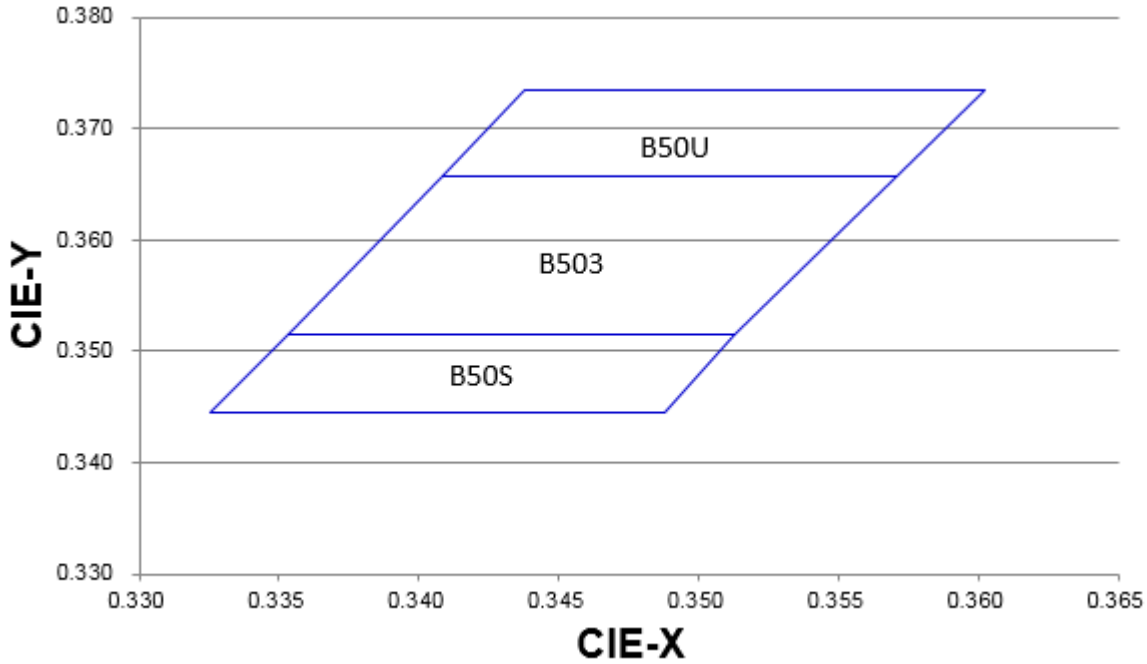

Bin Range of Chromaticity Coordinates

坐标点								
B50U	0.3438	0.3735	B503	0.3408	0.3657	B50S	0.3353	0.3515
	0.3408	0.3657		0.3353	0.3515		0.3325	0.3445
	0.35705	0.3657		0.3513	0.3515		0.3488	0.3445
	0.3602	0.3735		0.35705	0.3657		0.3513	0.3515
	0.3438	0.3735		0.3408	0.3657		0.3353	0.3515
配BIN 方案: B50S: B50U=1:1								


The C.I.E. 1931 Chromaticity Diagram  
 5700K

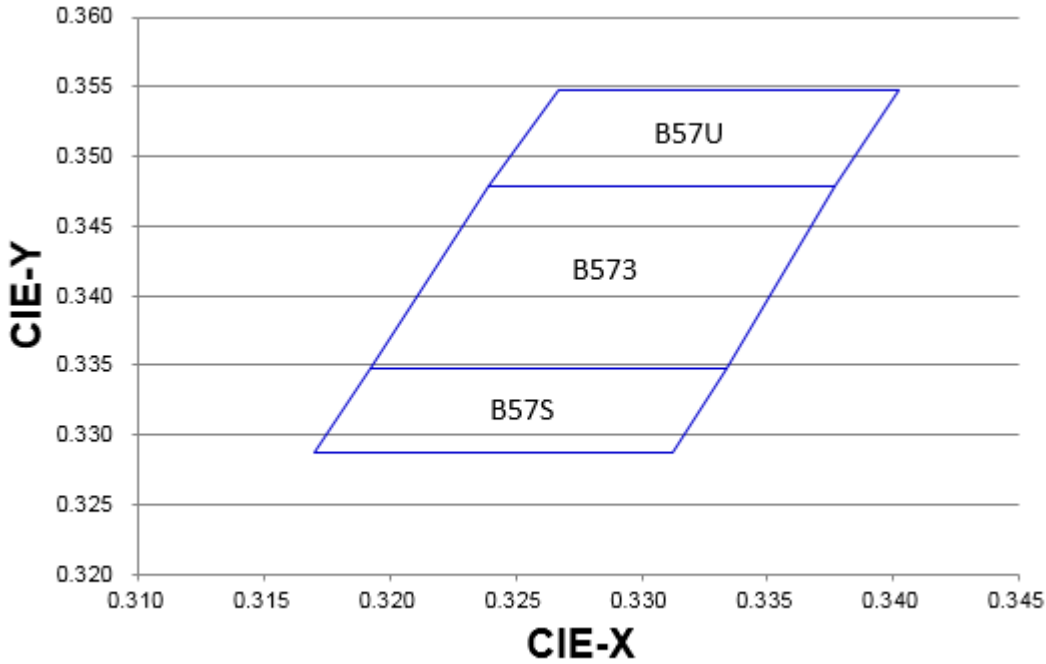

Bin Range of Chromaticity Coordinates

坐标点								
B57U	0.327	0.355	B573	0.324	0.348	B57S	0.319	0.335
	0.324	0.348		0.319	0.335		0.317	0.329
	0.338	0.348		0.333	0.335		0.331	0.329
	0.34	0.355		0.338	0.348		0.333	0.335
	0.327	0.355		0.324	0.348		0.319	0.335
配BIN 方案: B57S: B57U=1:1								

The C.I.E. 1931 Chromaticity Diagram  
 6300K

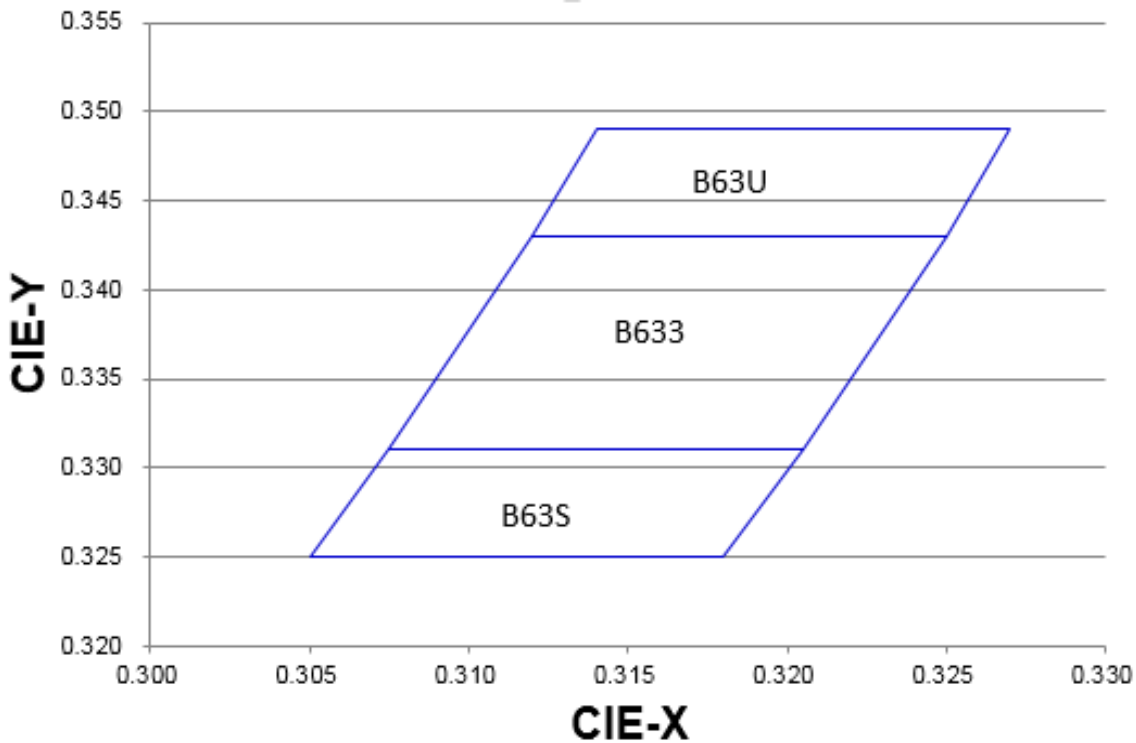


Bin Range of Chromaticity Coordinates

坐标点								
B63U	0.314	0.349	B633	0.312	0.343	B63S	0.3075	0.331
	0.312	0.343		0.3075	0.331		0.305	0.325
	0.325	0.343		0.3205	0.331		0.318	0.325
	0.327	0.349		0.325	0.343		0.3205	0.331
	0.314	0.349		0.312	0.343		0.308	0.331
配BIN 方案: B63S: B63U=1:1								



The C.I.E. 1931 Chromaticity Diagram  
 6500K

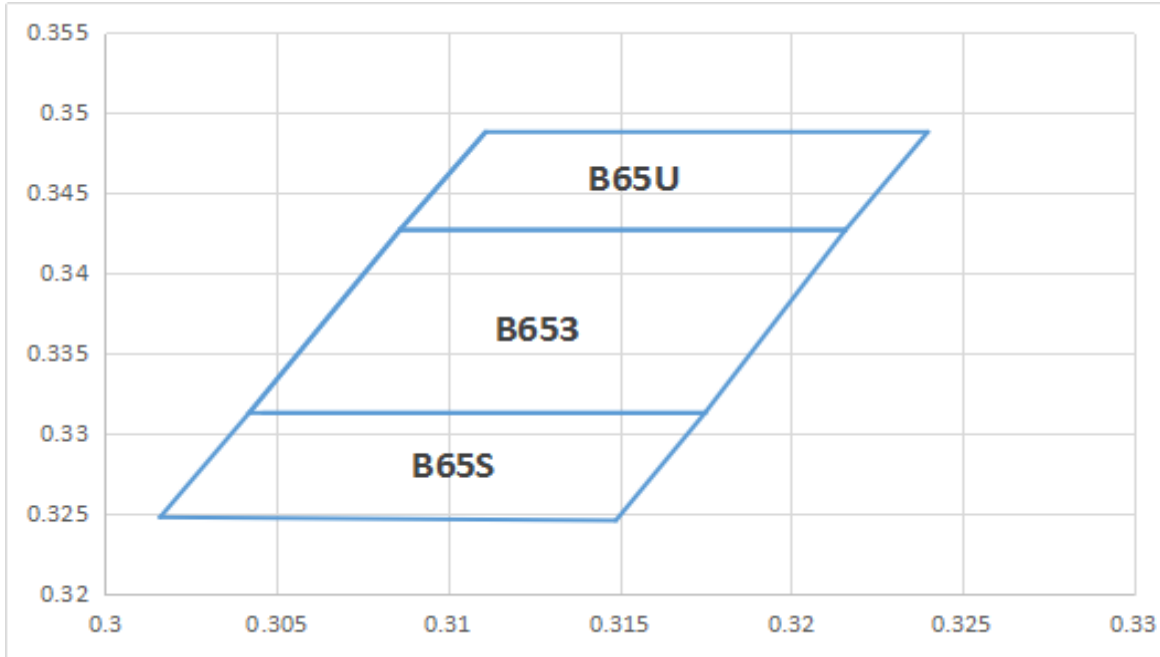


Bin Range of Chromaticity Coordinates

坐标点								
B65U	0.3111	0.3488	B653	0.3086	0.3427	B65S	0.3042	0.3313
	0.3086	0.3427		0.3042	0.3313		0.3016	0.3248
	0.3216	0.3427		0.3175	0.3313		0.3149	0.3246
	0.324	0.3488		0.3216	0.3427		0.3175	0.3313
	0.3111	0.3488		0.3086	0.3427		0.3046	0.3313
配 BIN 方案: B65S: B65U=1:1								


- Notes:
1. The value is based on driving current by 60mA.
  2. Tolerance of Chromaticity Coordinates:  $\pm 0.004$ .

**Spectrum Distribution**

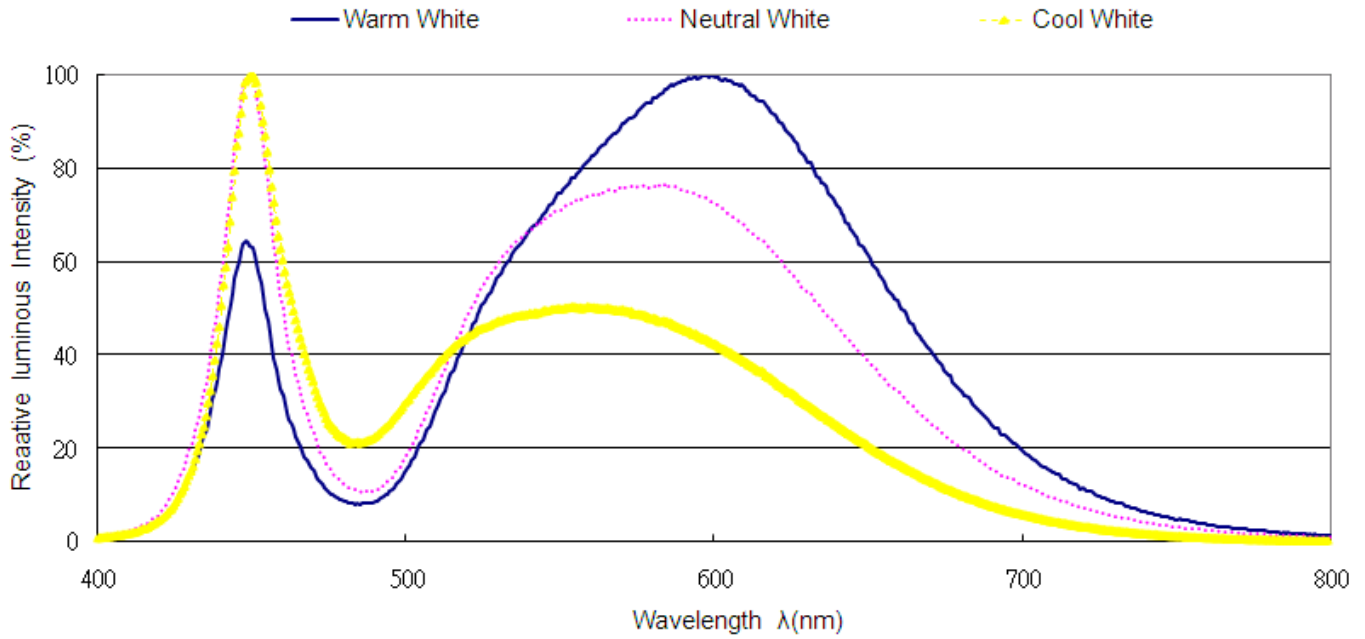


**Typical Electro-Optical Characteristics Curves**

**Fig.1 – Forward Voltage Shift vs. Junction Temperature**

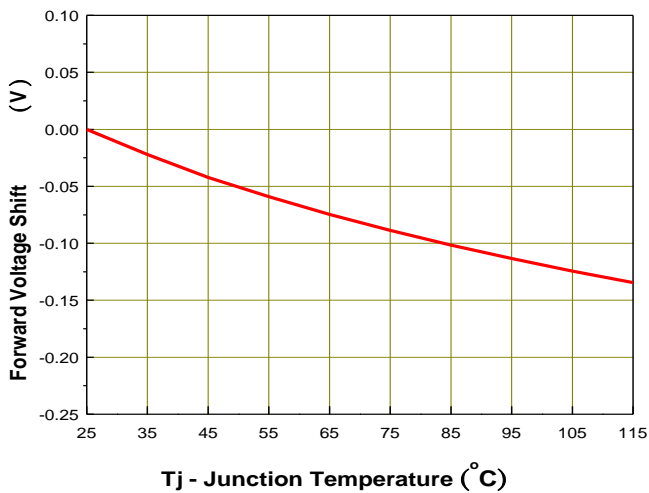

**Fig.2 - Relative Luminous Intensity vs. Forward Current**

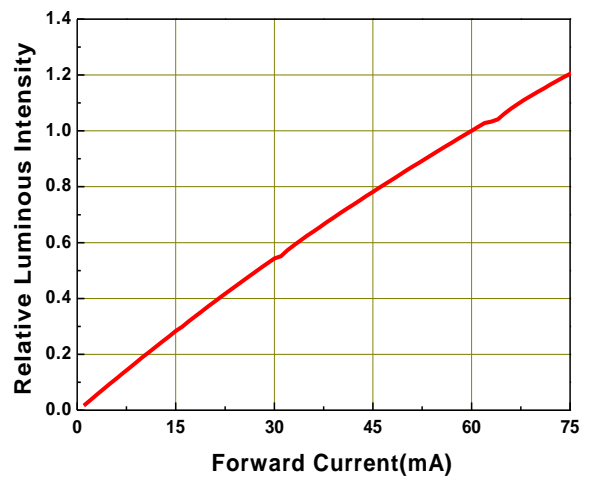

Typical Electro-Optical Characteristics Curves

Fig.3 - Relative Luminous Intensity vs. Junction Temperature

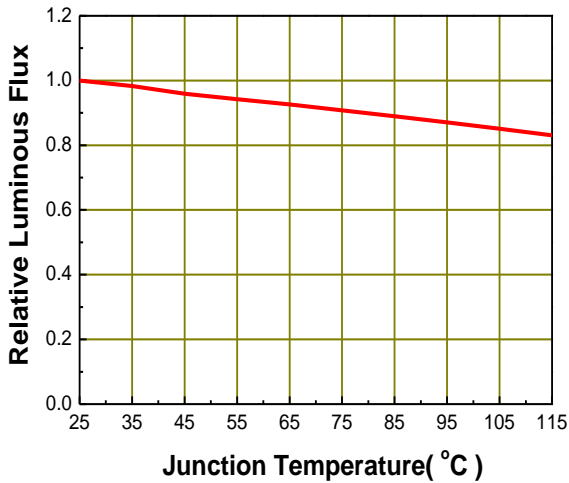


Fig.4 - Forward Current vs. Forward Voltage

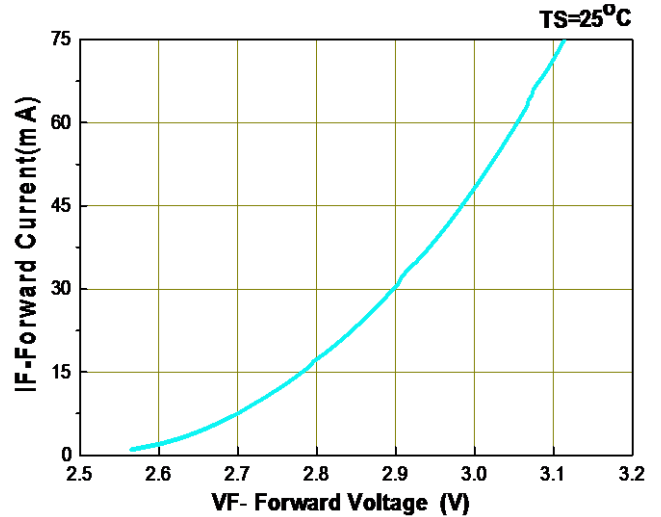


Fig.5 – Max. Driving Forward Current vs. Soldering Temperature

$R_{th\ j-s}=32^{\circ}C/W$



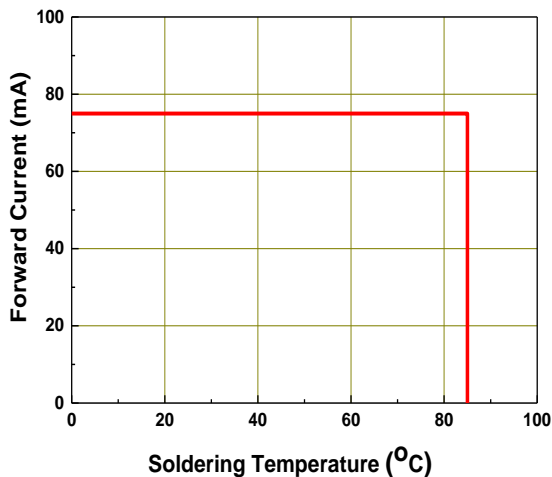



Fig.6 – Radiation Diagram

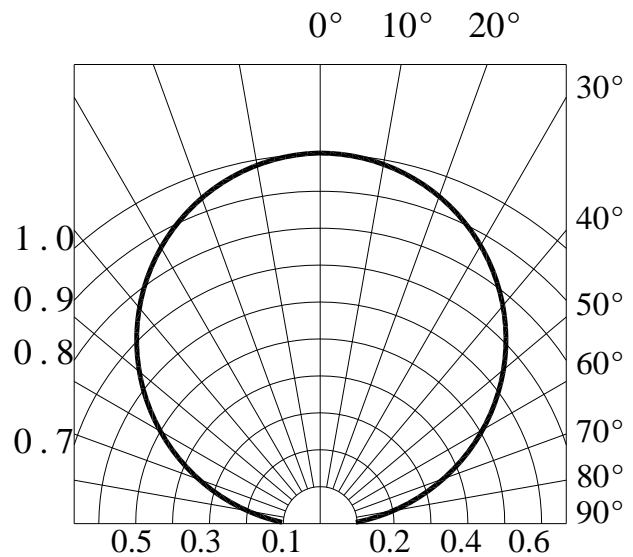


Package Dimension

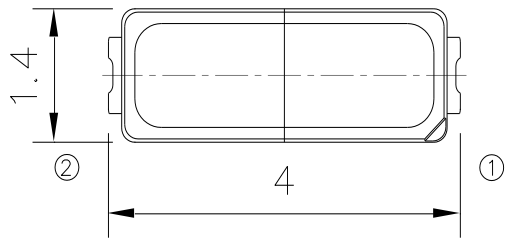

Polarity

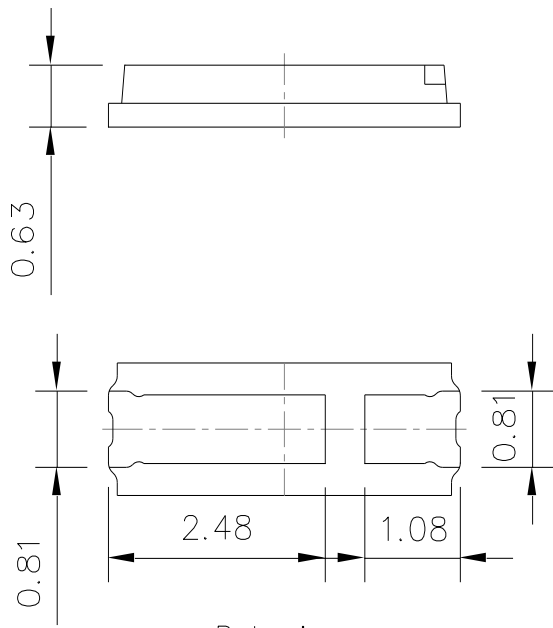

Bot. view

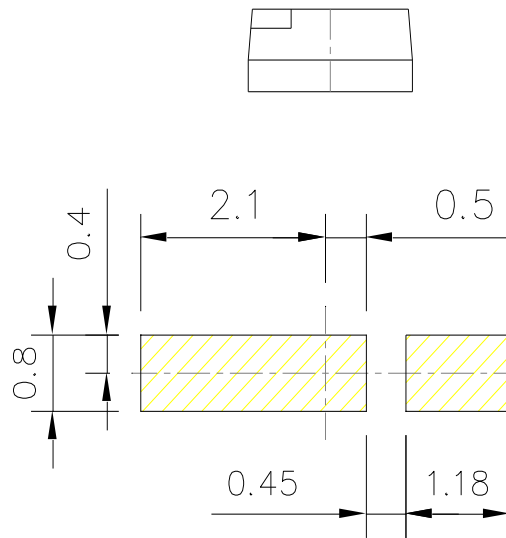


Soldering patterns

Note:  
Tolerance unless mentioned is  $\pm 0.15$  mm; Unit = mm


Moisture Resistant Packing Materials

Label Explanation

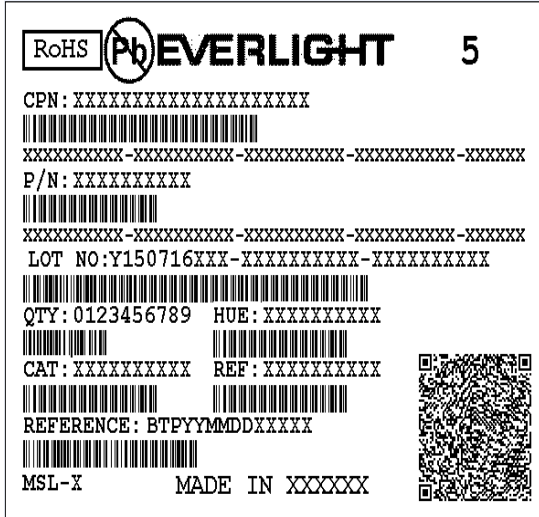


- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

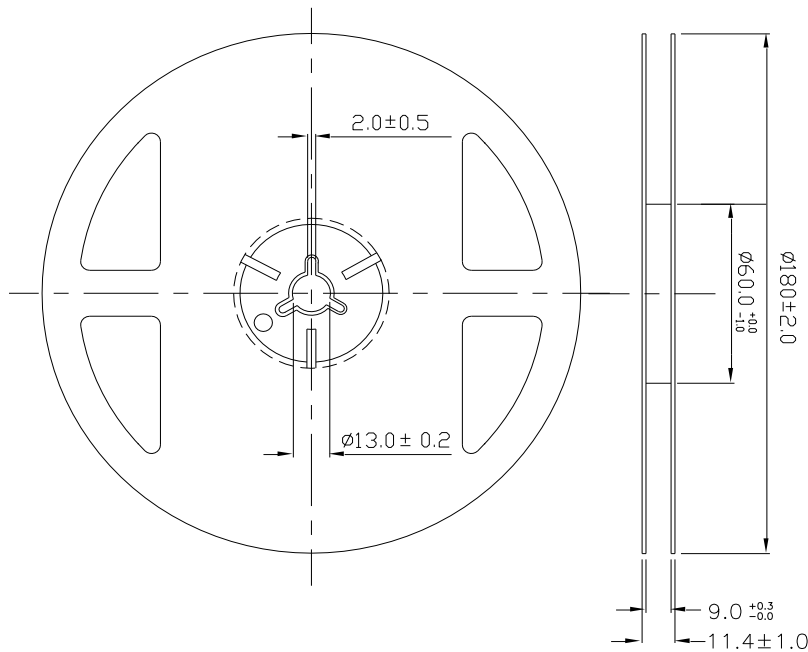


Note:  
 Tolerances unless mentioned  $\pm 0.1$  mm. Unit = mm

**Carrier Tape Dimensions: Loaded Quantity 500/1000/1500/2000/2500/3000/3500/4000 pcs Per Reel**

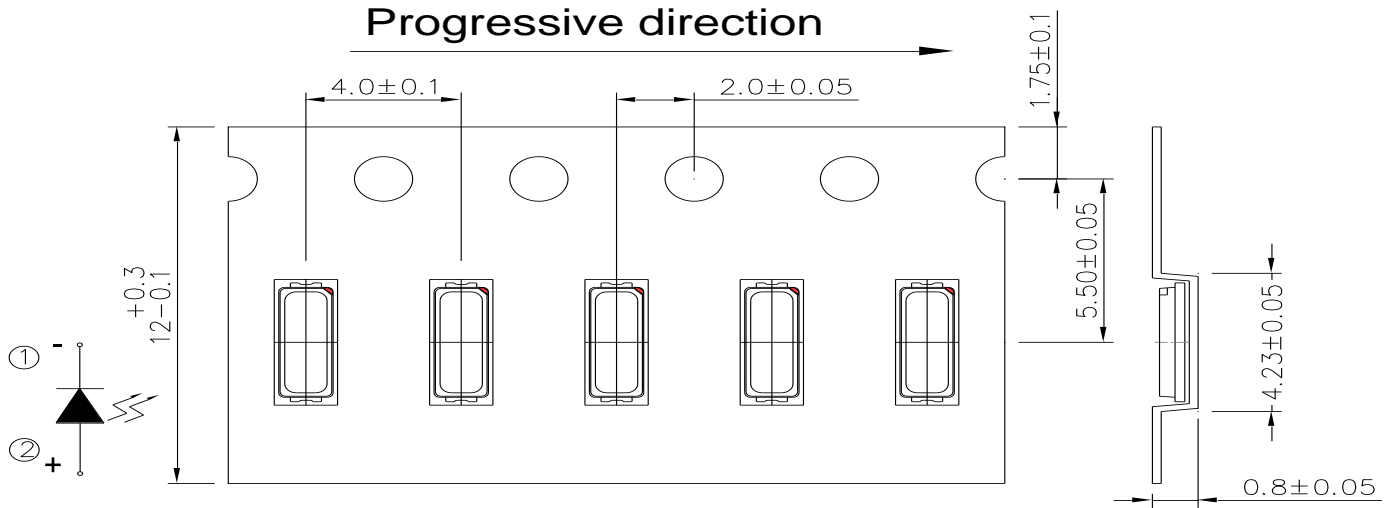

Note:  
 1. Tolerance unless mentioned is  $\pm 0.1$ mm; Unit = mm

**Moisture Resistant Packing Process**

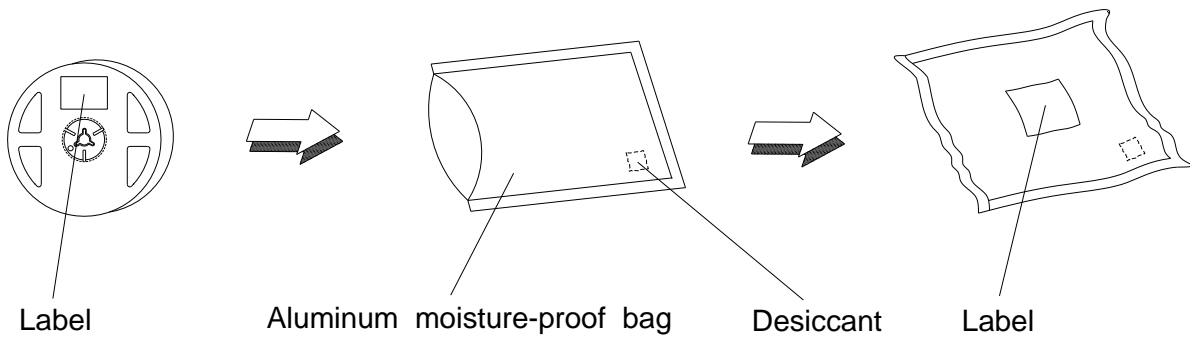

## Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.  
 Confidence level : 90%  
 LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Resistance to Solder Heat	Temp. : 260°C/10sec.	3 Times.	8 PCS.	0/1
2	Temperature Cycle	-40°C~100°C / Dwell time 30min	200 Cycles	8 PCS.	0/1
3	High Temperature/Humidity Life	Ta=85°C,85%RH, I <sub>F</sub> = 75mA	1000 Hrs.	8 PCS.	0/1
4	Low Temperature Life	Ta=-40°C, I <sub>F</sub> = 75 mA	1000 Hrs.	8 PCS.	0/1
5	High Temperature Life	Ta=60°C, I <sub>F</sub> =75mA	3000 Hrs.	8 PCS.	0/1
6	High Temperature Life	Ta=85°C, I <sub>F</sub> =75 mA	3000 Hrs.	8 PCS.	0/1
7	Pulse	ON 30ms / OFF 2500ms	30000 CYCLES	8 PCS.	0/1
8	Thermal Shock	H : +100°C 20min ∩ 10 sec L : -40°C 20min	200 Cycles	8 PCS.	0/1
9	Power Temperature Cycle	H : +100°C 15min ∩ 5 min L : -40°C 15min I <sub>F</sub> = 50 mA	200 Cycles	8 PCS.	0/1

## Precautions for Use

### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

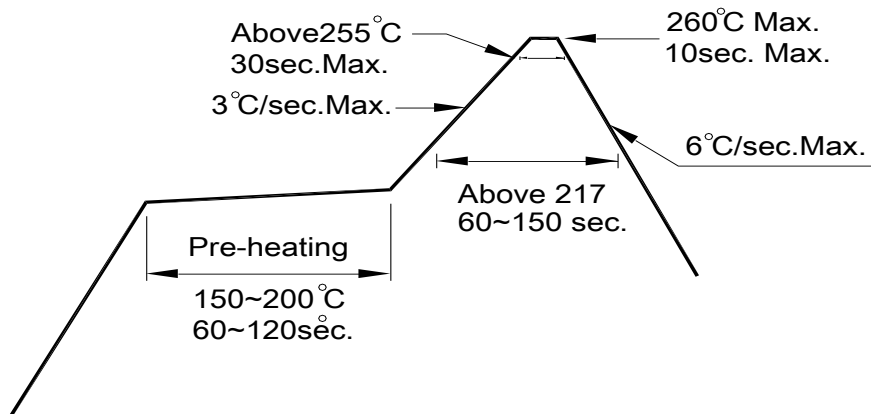

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

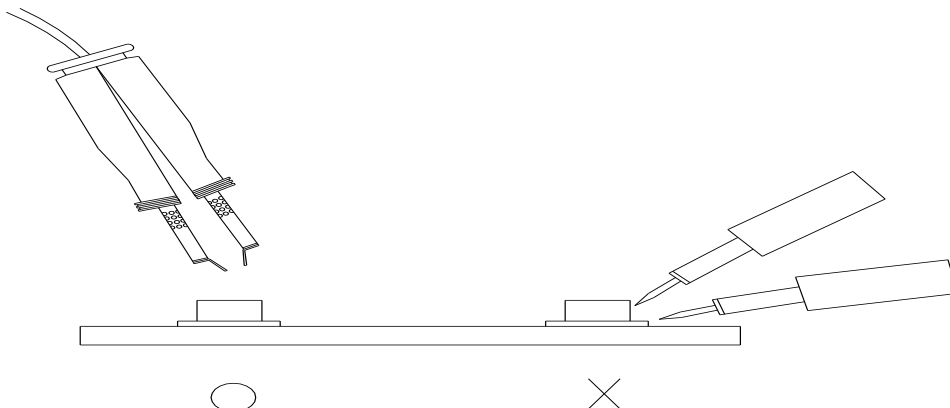



## **DISCLAIMER**

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical,

单击下面可查看定价，库存，交付和生命周期等信息

[>>Everlight \(亿光\)](#)