方成电子 (东莞) 有限公司



FC-LCM3225-LCM4532-Series Common mode Chokes

Features:


- 1、 FC-LCM common mode impedance at high frequency effects excellent noise suppression performance. 在高頻的共模阻抗具有良好的杂讯抑制表现.
- 2. The common mode choke coils structure enables noiseSuppression
- 3, without degrading the signal


(共模扼線圈的結構使得雜讯被抑制訊號衰减。)

Applications:

Used for power line noise suppression for any electronic devices. Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.

1.SHAPES AND DIMENSIONS Unit:mm

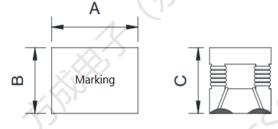






PartNumber	A	В	С	D Typ	E(ref)
FC-LCM3225	3.2±0.3	2.5±0.3	2.5±0.3	0.8	0.6
FC-LCM4532	4.5±0.3	3.2±0.3	3.2±0.3	1.0	1.0

2.MEASURING CIRCUITS

- A chip-type common mode filter for large current applications.
 Common mode impedance surpasses 300 to 1000∧ at 100MHz.
 Noise is greatly suppressed.
- Capable of handling the highest current (up to 10A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.







FangchengElectronics(Dongguan)Co.,LTD

E-mail:yhl@fangchengcoils.com

TEL: 0769-82988010 FAX: 0769-82988065

http://www.fangchengcoils.com





方成电子(东莞)有限公司




FC-LCM3225-LCM4532-Series Common mode Chokes

3.ELECTRICAL CHARACTERISTICS

PART Number	Z(Ω) 100MHz/0.1V	RDC (mΩ) Max	Rated Current (A) Max	IR (MΩ) Min	Rated Voltage(V)
Number	Ω /typ	IVIAX			
FC-LCM3225-421	420	30	2.0	10	
FC-LCM3225-501	500	50	1.5	10	125
FC-LCM3225-701	700	60	1.0	10	125
FC-LCM3225-102	1000	75	0.5	10	

4. IMPEDANCE vs. FREQUENCY CHARACTERISTICS

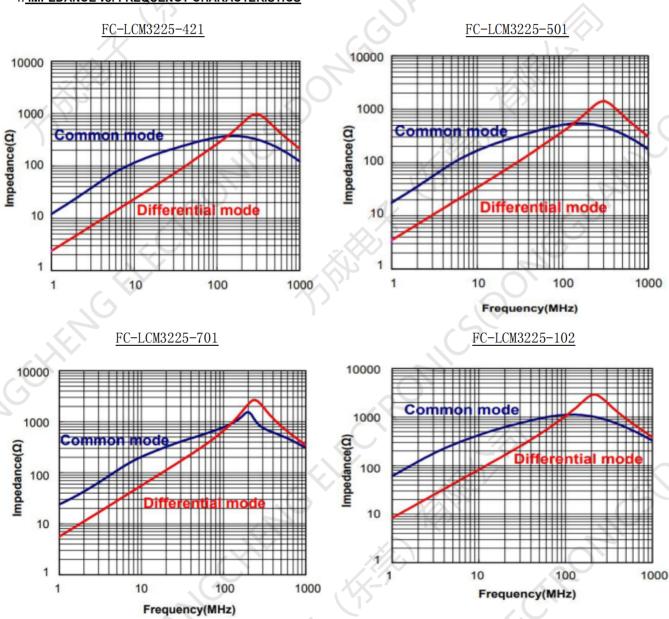

FangchengElectronics(Dongguan)Co.,LTD E-mail:yhl@fangchengcoils.com

TEL: 0769-82988010 FAX: 0769-82988065 http://www.fangchengcoils.com

方成电子(东莞)有限公司




FC-LCM3225-LCM4532-Series Common mode Chokes

5.ELECTRICAL CHARACTERISTICS

PART Number	Z(Ω) 100MHz/0.1V		RDC (mΩ) Max	Rated Current (A)	IR (MΩ) Min	Rated
Number	Ω/min	typ	IVIAX	Max		Voltage(V)
FC-LCM4532-421	350	420	25	2.5	10	
FC-LCM4532-701	500	700	38	2.0	10	425)/
FC-LCM4532-102	850	1000	50	1.5	10	125V
FC-LCM4532-152	1300	1500	65	1.0	10	

6.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

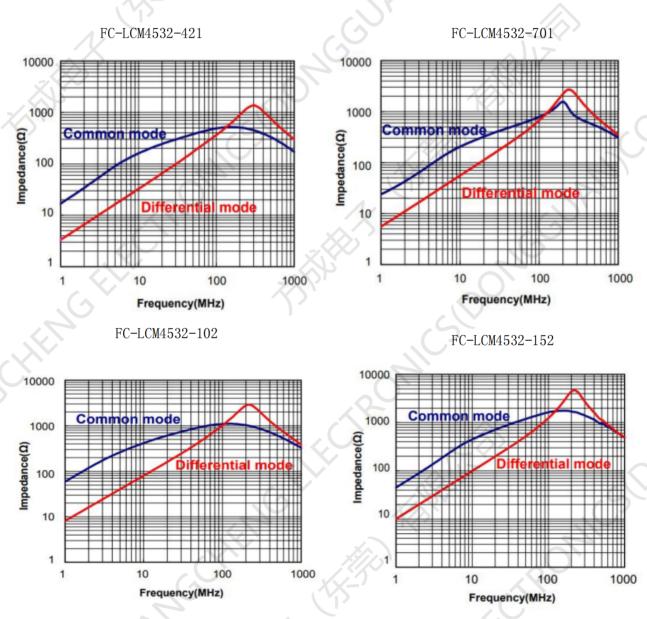

FangchengElectronics(Dongguan)Co.,LTD E-mail:yhl@fangchengcoils.com

TEL: 0769-82988010 FAX: 0769-82988065 http://www.fangchengcoils.com

单击下面可查看定价,库存,交付和生命周期等信息

>>FC(方成)