


## VL型立式固定電感器 VL TYPE VERTICAL FIXED INDUCTORS

### 訂貨代碼 HOW TO ORDER

舉例 FOR EXAMPLE

|    |   |      |   |     |   |   |
|----|---|------|---|-----|---|---|
| VL | U | 0608 | — | 220 | K | P |
| ↓  | ↓ | ↓    |   | ↓   | ↓ | ↓ |
| A  | B | C    |   | D   | E | F |

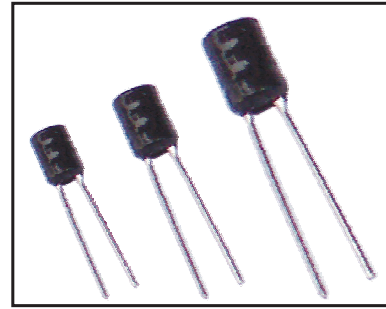

A:

| 產品類別<br>Product type |                                    |
|----------------------|------------------------------------|
| VL                   | 立式固定電感器<br>Vertical fixed inductor |

C:

| 尺寸<br>Dimensions(mm) |             |            |
|----------------------|-------------|------------|
| 類型<br>Type           | 外徑<br>ΦCmax | 體長<br>Amax |
| 0406                 | 4.5         | 7.0        |
| 0608                 | 8.0         | 10.0       |
| 0810                 | 10.5        | 12.5       |
| 0912                 | 12.0        | 14.5       |
| 1012                 | 12.5        | 14.5       |

E:

| 感量偏差<br>Tolerance |        |
|-------------------|--------|
| J                 | ± 5.0% |
| K                 | ± 10%  |
| M                 | ± 20%  |

B:

| 封裝形式<br>Envelopment configuration |                           |
|-----------------------------------|---------------------------|
| U                                 | UL套管<br>UL sleeve         |
| B                                 | 樹脂包封<br>Resin             |
| P                                 | PET套管<br>PET sleeve       |
| M                                 | 磁屏蔽<br>Magnetic shielding |
| 空格                                | 無封裝<br>No Encapsulation   |

D:

| 標稱電感量<br>Nominal inductance(μH)  |
|--|
| <p>前兩位數字為有效數字，后一位數字表示零的個數。<br/>The first two digits are significant, and the third digit is number of zero<br/>例如For example:</p> <p>101=100 μH<br/>5R6=5.6 μH<br/>R22=0.22 μH</p> |


F:

| 包裝方式別<br>Packaging style |              |
|--------------------------|--------------|
| F                        | 散包裝<br>Bulk  |
| P                        | 編帶包裝<br>Tape |

# VL型立式固定電感器

## VL TYPE VERTICAL FIXED INDUCTORS


- 構造(外形及尺寸)  
STRUCTURE(EXTERNAL DIMENSIONS)

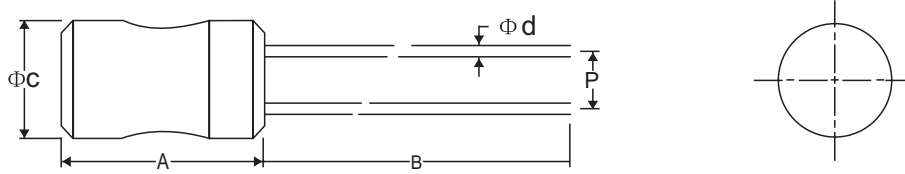

| 類型Type | 尺寸Dimensions(mm) |        |        |           |         |
|--------|------------------|--------|--------|-----------|---------|
|        | ΦC(max)          | A(max) | B(min) | Φd        | P       |
| 0406   | 4.5              | 7.0    | 15.0   | 0.50±0.05 | 2.0±1.0 |
| 0608   | 8.0              | 10.0   | 15.0   | 0.60±0.05 | 2.5±1.0 |
| 0810   | 10.5             | 12.5   | 15.0   | 0.60±0.05 | 3.5±1.5 |
| 0912   | 12.0             | 14.5   | 15.0   | 0.65±0.05 | 5.0±1.5 |
| 1012   | 12.5             | 14.5   | 15.0   | 0.65±0.05 | 6.0±1.5 |

#特殊要求的產品可以根據客戶要求生產  
The products can be customized according to customer requirement.

- 包裝方式&數量  
PACKAGING STYLE&QUANTITY

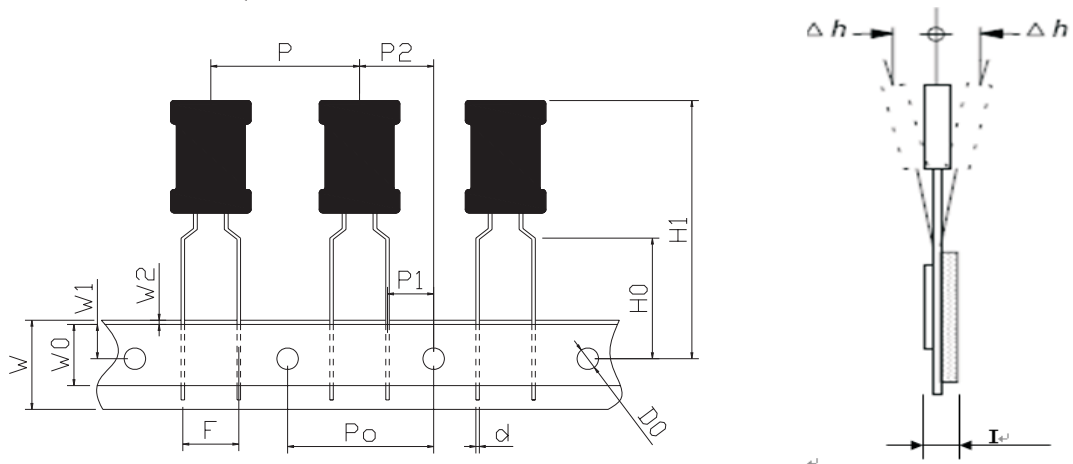

| 代號<br>Code | P    | P0   | P1   | P2   | d    | Δh   | W    | W0   | W1   | W2   | H0    | H1   | D0   | I   | F    |
|------------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-----|------|
| 尺寸<br>Dim. | 12.7 | 12.7 | 3.85 | 6.35 | 0.6  | 0    | 18.5 | 12   | 9    | 1.5  | 15-20 | 35.0 | 4.0  | 1.4 | 5.0  |
| 誤差<br>Tol. | ±1.0 | ±0.2 | ±0.7 | ±0.4 | ±0.1 | ±1.0 | ±1.0 | ±1.0 | ±1.0 | ±1.5 | ±0.5  | Max  | ±0.2 | Max | ±0.8 |

| 包裝方式<br>Packaging style | 散包裝Bulk | 盒帶包裝 Ammok |
|-------------------------|---------|------------|
| 包裝數量Quantity            | 200pcs  | 1500pcs    |

#可根據用戶需求包裝  
Packaging according to customer's requirement

单击下面可查看定价，库存，交付和生命周期等信息

[>>FH\(风华高科\)](#)