

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ02-104E		
	Product Specification and Approval Sheet	Version	5	Page

Radial Leaded PTC Resettable Fuse: FRU135-30F

1. Summary

- (a) **RoHs Compliant (Lead Free) Product**
- (b) **Applications: Wide variety of electronic equipment**
- (c) **Product Features: Low resistance, High hold current, Solid state, Radial leaded product ideal for up to 30V**
- (d) **Operation Current: 1.35A**
- (e) **Maximum Voltage: 30V**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition


UL: File No. E211981
 C-UL: File No. E211981
 TÜV: File No. R50004084

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max.Time To Trip	Maximum Current	Rated Voltage	Typical Power	Resistance	
	I _H , A	I _T , A	at 5xI _H ,s	I _{MAX} , A	V _{MAX} , VDC	P _d , W	R _{MIN}	R _{1MAX}
							Ohms	Ohms
FRU135-30F	1.35	2.70	7.3	100	30	0.8	0.040	0.130

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
 I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
 V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
 I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
 P_d=Maximum power dissipated from device when in tripped state in 23°C still air environment.
 R_{MIN}=Minimum device resistance at 23°C.
 R_{1MAX}=Maximum device resistance at 23°C, 1 hour after tripping.
 Physical specifications:
 Lead material: Tin plated copper, 24 AWG.
 Soldering characteristics: MIL-STD-202, Method 208E.
 Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement.

4. Production Dimensions (millimeter)




FRU 135-30F
 Lead Size: 24AWG
 Φ 0.51 mm Diameter

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
FRU135-30F	8.9	13.5	5.1	7.6	3.0	0.9


NOTE : Specification subject to change without notice



5. Thermal Derating Curve

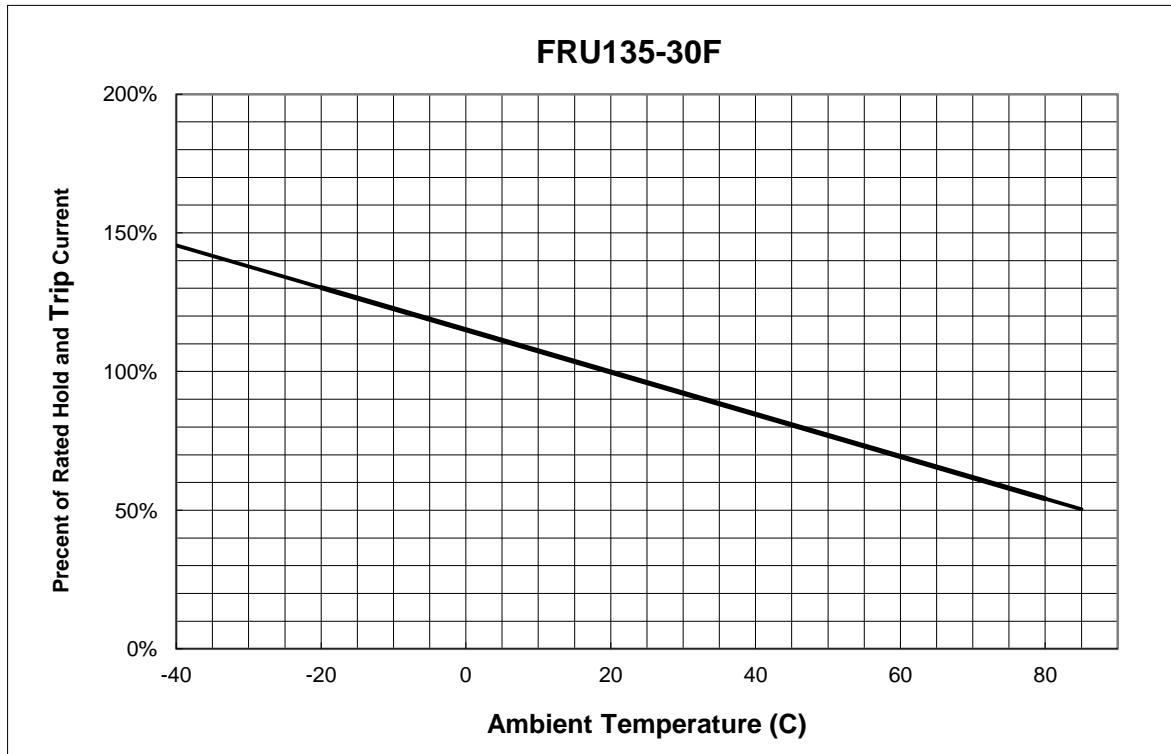

6. Typical Time-To-Trip at 23°C

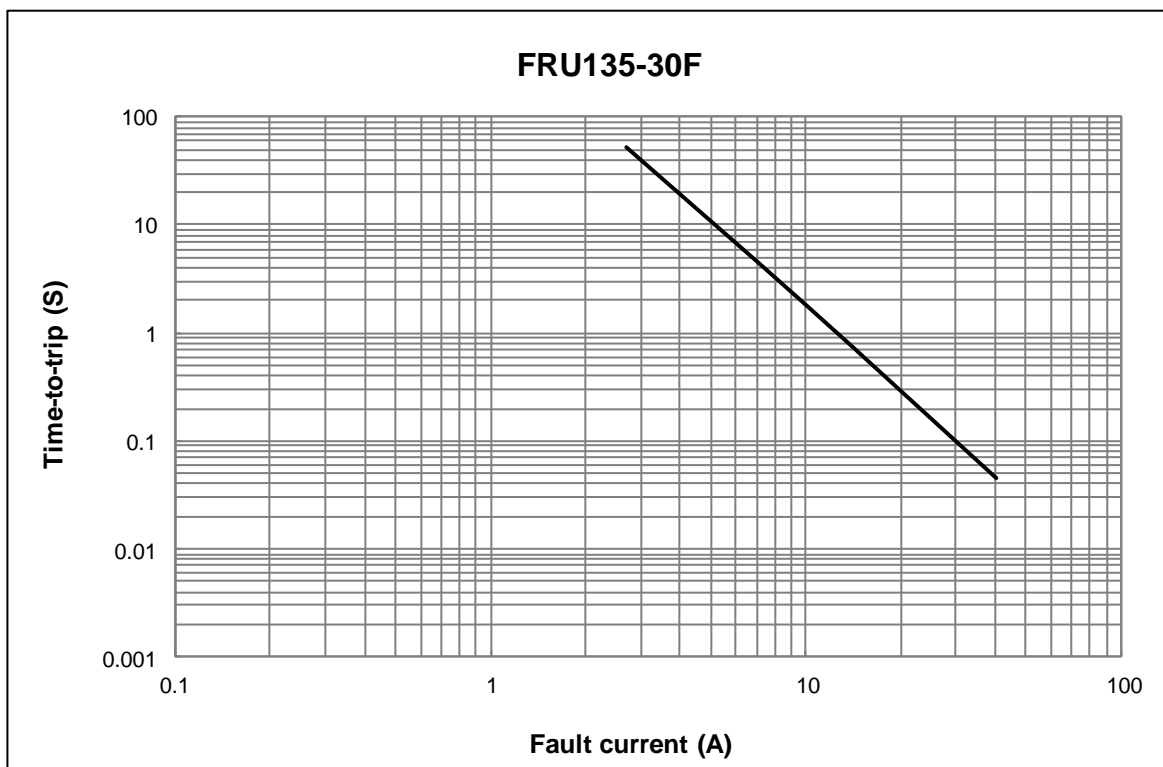

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ02-104E		
	Product Specification and Approval Sheet	Version	5	Page

7. Material Specification

Lead material: Tin plated copper, 24 AWG.



Soldering characteristics: MIL-STD-202, Method 208E.

Insulating coating: Flame retardant epoxy, meets UL-94V-0 requirement.

8. Part Numbering and Marking System


Part Numbering System

F R U □ □ □ - □ □ F



Example

Part Marking System

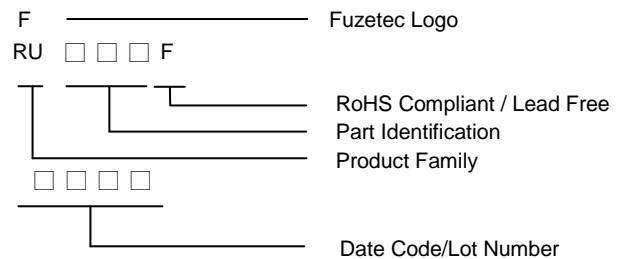

Note: Font on Marking may look slightly different due to fine turnings of each Marking printer.

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

单击下面可查看定价，库存，交付和生命周期等信息

[>>FUZETEC](#)