



SS52A-SS520A Schottky Rectifier

Feature


- High current capability
- Low VF
- High surge current capability

Application

- Rectifier

Marking

- SS5X
X: From 2 To 20

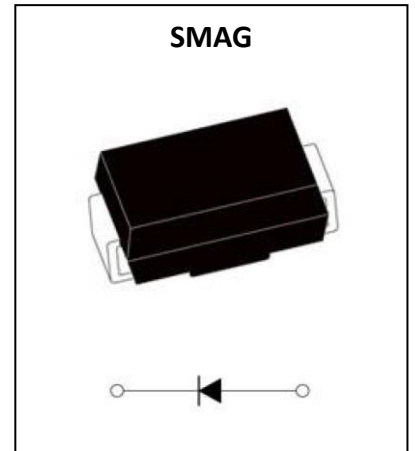

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SS5									Unit
		2	3	4	5	6	8	10	15	20	
Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	V
Average Forward Current (60HZ Half-sine wave, Resistance load, TL(Fig.1))	$I_{F(AV)}$	5.0									A
Non-repetitive Peak Forward Surge Current (60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$)	I_{FSM}	120									A
Junction Temperature	T_J	-55 ~ +125			-55 ~ +150						$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150									$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	SS5							Unit		
			2	3	4	5	6	8	10		15	20
Peak Forward Voltage	V_F	$I_F=5\text{A}$	0.55		0.70		0.85		0.95		V	
Peak Reverse Current	I_{RRM1}	$V_{RM}=V_{RR}$	$T_a=25^\circ\text{C}$		1.0							mA
	I_{RRM2}	M	$T_a=100^\circ\text{C}$		50							mA
Typical Thermal Resistance	$R_{\theta J-A}$		55							$^\circ\text{C}/\text{W}$		

Note:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.20" x 0.20" (5.0 mm x 5.0 mm) copper pad areas.

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

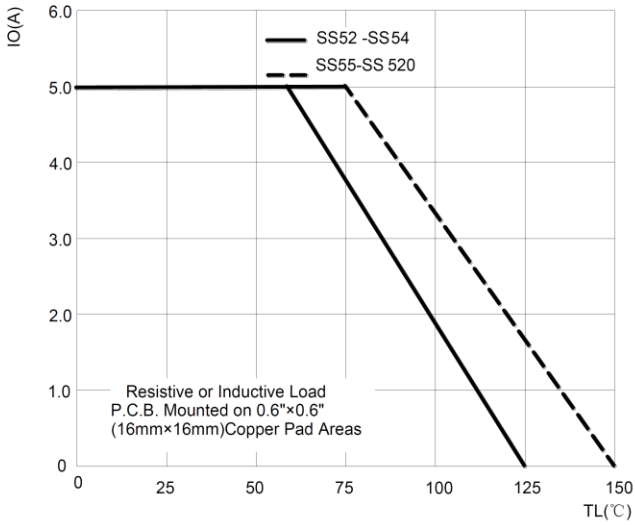


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

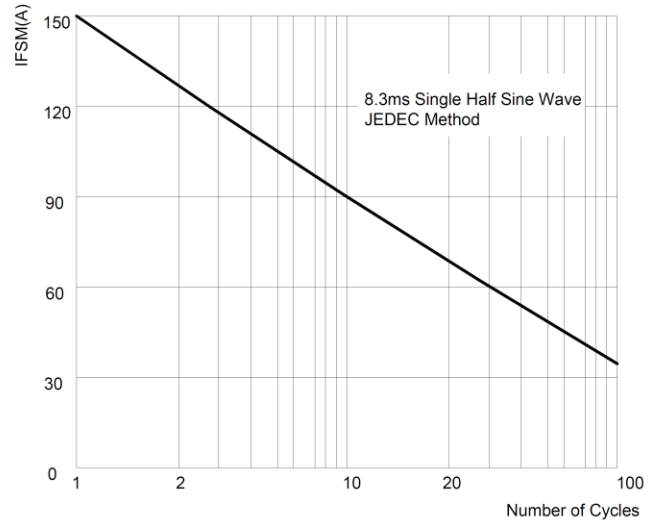


FIG.3: TYPICAL FORWARD CHARACTERISTICS



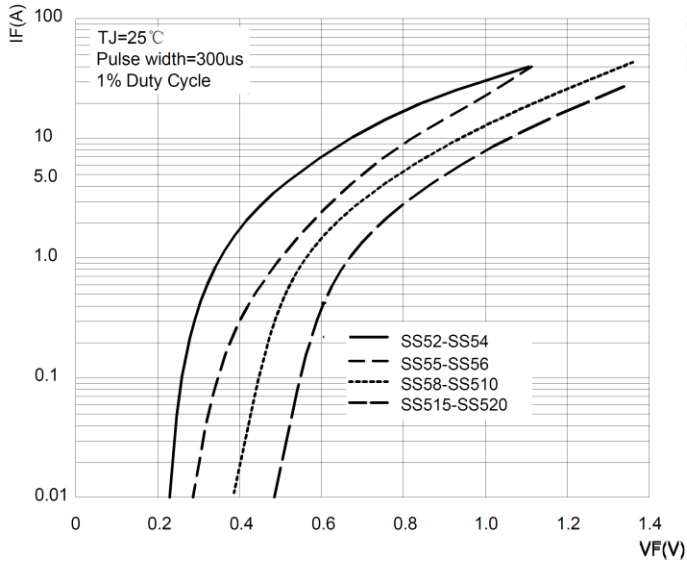


FIG.4: TYPICAL REVERSE CHARACTERISTICS

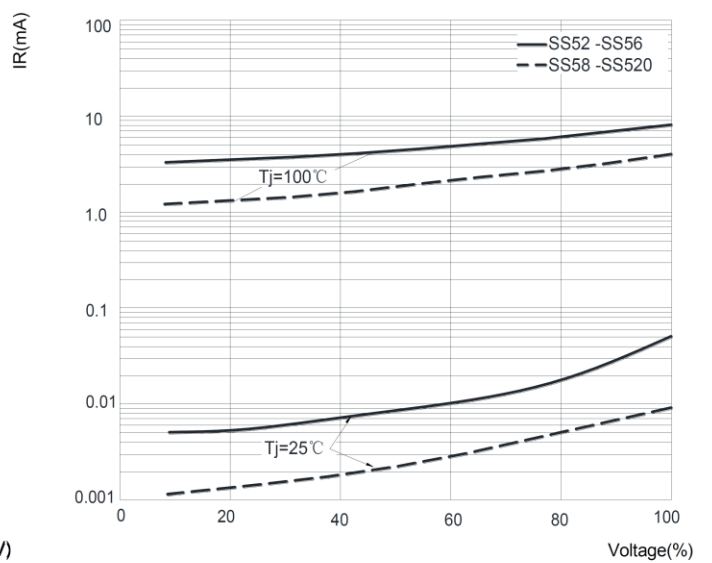

SMAG Package Outline Dimensions

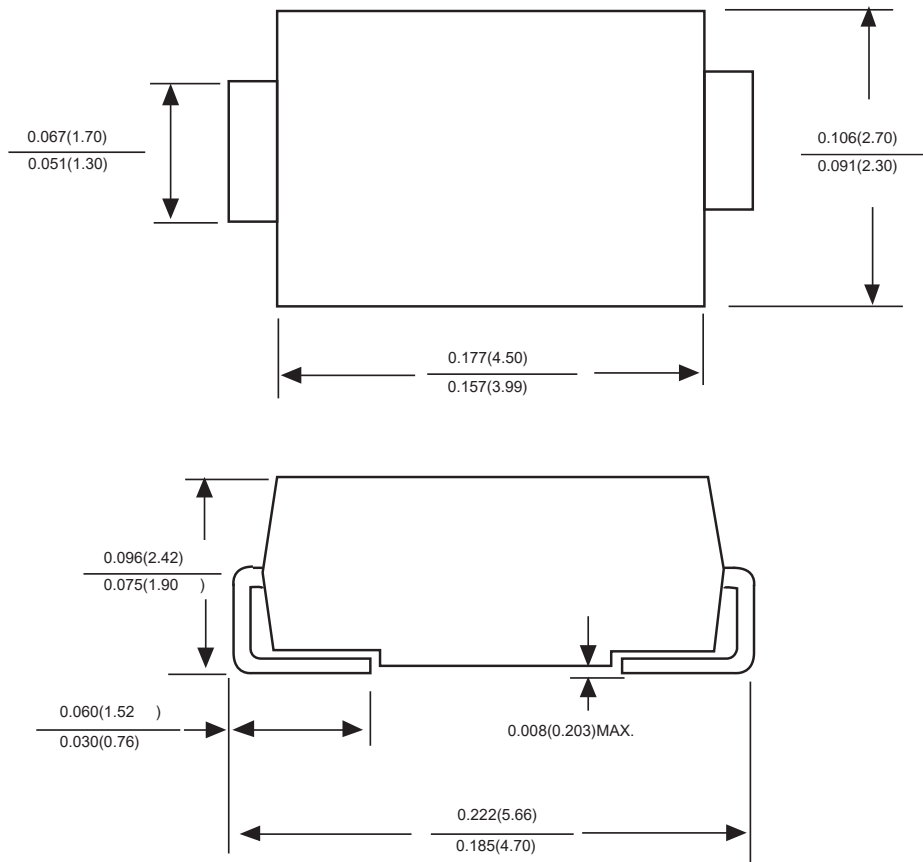

Dimensions in inches and (millimeters)

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.

单击下面可查看定价，库存，交付和生命周期等信息

[>>GP\(格瑞宝\)](#)