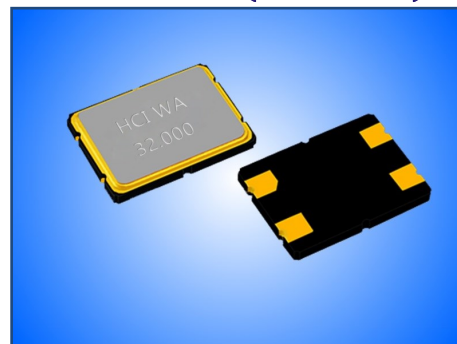


QUARTZ CRYSTAL UNIT IN SMD 7.0x5.0MM CERAMIC SEAM SEAL PACKAGE.
PRODUCT FEATURES


- Dimensions 7.0x5.0x1.0 / 4 pads.
- Highly reliable seam sealed ceramic package.
- Tight tolerances and stabilities over temperature range.
- Automotive compliance to AEC-Q200 available.
- RoHS compliant, LEAD-FREE and HALOGEN-FREE.

APPLICATIONS

- Wireless LAN
- Bluetooth
- Mobil communication
- Handheld equipment

PRODUCT PHOTO (NOT IN SCALE)

PRODUCT SPECIFICATIONS

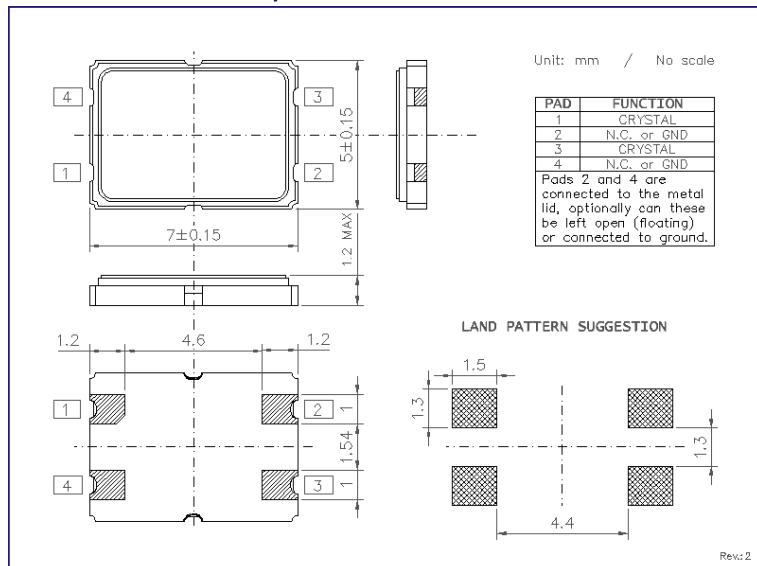PARAMETER	0175M4		CONDITIONS / REMARKS	
Nominal frequency range	6.000 ~ 100.000MHz		Fundamental up to 55MHz and 3rd overtone available.	
Crystal cut and mode	AT-cut / FUND & 3rd OT			
Frequency tolerance	±10ppm / ±20ppm / ±30ppm		Other options available.	
Frequency stability	±10ppm	±15ppm	Other options available.	
Operating temperature range	-20 to +70°C	-30 to +85°C	Other options available.	
Equivalent series resistance	FUND	ESR	3rd OT	ESR
	6.0 to 8.0MHz	<100Ω	40.0 to 84.0MHz	<80Ω
	8.1 to 10.0MHz	<80Ω	84.1 to 100.0MHz	<60Ω
	10.1 to 16.0MHz	<50Ω		
16.1 to 55.0MHz	<40Ω			
Load capacitance	6 ~ 32pF or SERIES		Please specify.	
Shunt capacitance	<6.0pF		--	
Drive level	100μW TYP / 500μW MAX		--	
Storage temperature range	-55 to +125°C		--	

PACKAGE OUTLINE / DIMENSIONS

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 16mm.
- Component pitch in carrier 8mm.
- Reel diameter 180mm.
- QTY per reel: 1,000pcs MAX.

RECOMMENDED REFLOW PROFILE


单击下面可查看定价，库存，交付和生命周期等信息

[>>HCI\(杭晶\)](#)