

QUARTZ CRYSTAL UNIT IN HC-49/U THRU-HOLE PACKAGE.
PRODUCT FEATURES

- Dimensions 11x13x4.5 with 2 leads.
- Ideal for low frequencies.
- Optional insulation spacer and cut leads available.
- RoHS compliant, LEAD-FREE and HALOGEN-FREE.

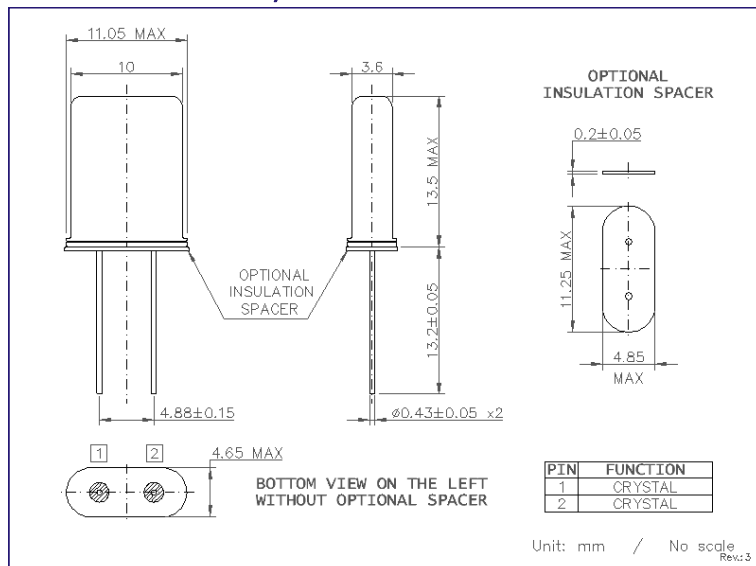
APPLICATIONS

- TV, Radio
- Communication devices
- Test Equipment
- Medical equipment

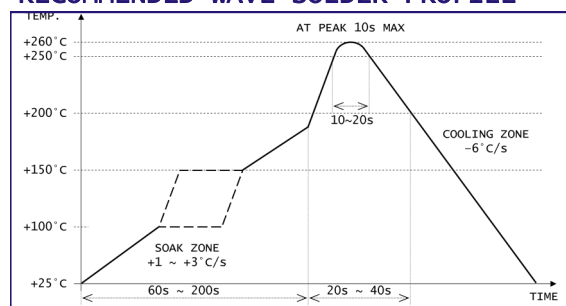
PRODUCT PHOTO (NOT IN SCALE)

PRODUCT SPECIFICATIONS

PARAMETER	049UT2		CONDITIONS / REMARKS
Nominal frequency range	1.8432 ~ 100.0MHz		Fundamental up to 35MHz and 3rd overtone up to 100MHz.
Crystal cut and mode	AT-cut / FUND & 3rd OT		
Frequency tolerance	±10ppm / ±20ppm / ±30ppm		Other options available.
Frequency stability	±10ppm	±30ppm	Other options available.
Operating temperature range	-20 to +70°C	-40 to +85°C	Other options available.
Equivalent series resistance	500Ω ~ 200Ω 150Ω ~ 100Ω 100Ω ~ 40Ω <30Ω <40Ω		FUND - 1.8 to 2.9MHz FUND - 3.0 to 4.5MHz FUND - 4.6 to 9.9MHz FUND - >10.0MHz 3rd OT - 35.0 to 100.0MHz
Load capacitance	4 ~ 32pF or SERIES		Please specify.
Shunt capacitance	<7pF		--
Drive level	100μW TYP / 500μW MAX		--
Aging first year	±5ppm		@+25°C

PACKAGE OUTLINE / DIMENSIONS

PACKAGING INFORMATION

- Bulk packaging in vinyl bags and boxes.
- QTY per bag: 100pcs MAX.
- QTY per box: 1,000pcs MAX.

RECOMMENDED WAVE SOLDER PROFILE


单击下面可查看定价，库存，交付和生命周期等信息

[>>Hang Crystal International\(苏州杭晶电子科技有限公司\)](#)