


SMD 3.4x3.1 to 7.0x3.0 PACKAGE

PRODUCT FEATURES

- High selectivity, suitable for narrowband communication
- Compact structure and small size
- Electrical performance won't be affected by external electromagnetic interference
- Suitable for matching with different ICs
- Automatic on-line, can be reflowed
- RoHS compliant


PRODUCT PHOTO

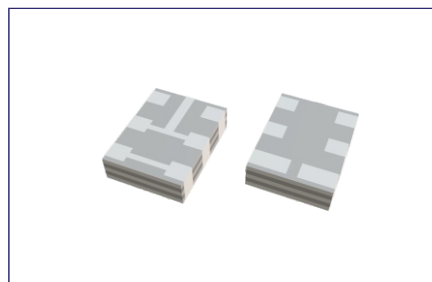


PRODUCT SPECIFICATIONS

Part Number	3dB Bandwidth (KHz)	20dB Bandwidth (KHz)Max	Insertion Loss(dB)	Spurious Attenuation (9-12MHz)(dB)min	Input/Output Impedance(Ω)
LTCA10.7MJ	150 $\pm$ 40	430	10	30	330
LTCV10.7MJ	150 $\pm$ 40	380	5.5 $\pm$ 2.0	35	330
LTCA10.7MS3	180 $\pm$ 40	520	7	30	330
LTCV10.7MS3	180 $\pm$ 40	470	4.0 $\pm$ 2.0	35	330
LTCA10.7MS2	230 $\pm$ 50	570	6	30	330
LTCV10.7MS2	230 $\pm$ 50	510	3.5 $\pm$ 2.0	35	330
LTCA10.7MA5	280 $\pm$ 50	650	6	30	330
LTCV10.7MA5	280 $\pm$ 50	590	3.0 $\pm$ 2.0	35	330
LTCV10.7MA20	330 $\pm$ 50	700	3.0 $\pm$ 2.0	30	330
LTCV10.7MA19	$\pm$ 175min	950	3.0 $\pm$ 2.0	20(5-15MHz)	470
LTCS10.7MS3	180 $\pm$ 40	470	4.5 $\pm$ 2.0	30	330
LTCS10.7MS2	230 $\pm$ 50	510	3.5 $\pm$ 2.0	30	330
LTCS10.7MA5	280 $\pm$ 50	590	3.0 $\pm$ 2.0	30	330
LTCS10.7MA20	330 $\pm$ 50	700	3.0 $\pm$ 2.0	30	330

PACKAGE OUTLINE / DIMENSIONS

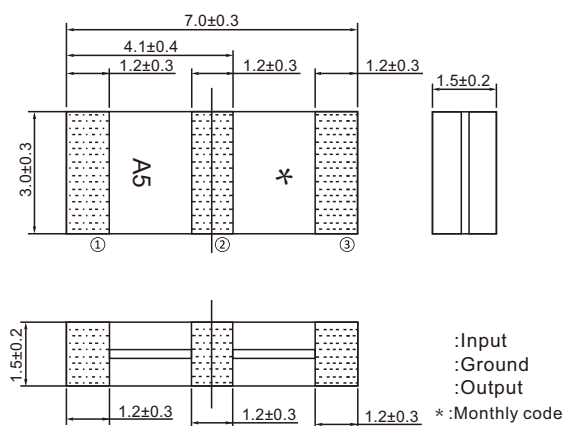

LTCV/CA Series

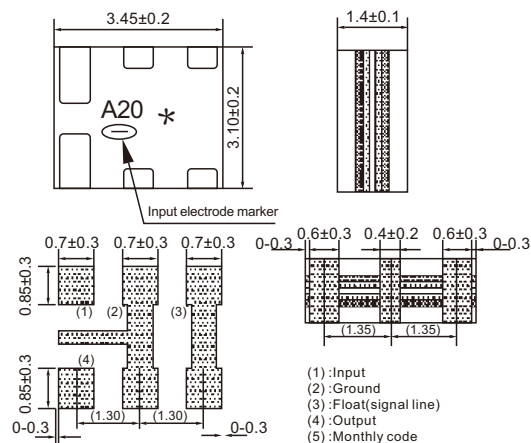

LTCS Series

单击下面可查看定价，库存，交付和生命周期等信息

[>>Hang Crystal International\(苏州杭晶电子科技有限公司\)](#)