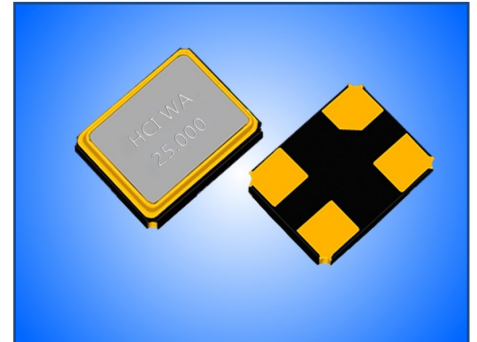


**QUARTZ CRYSTAL UNIT IN SMD 1.6x1.2MM CERAMIC SEAM SEAL PACKAGE.**
**PRODUCT FEATURES**

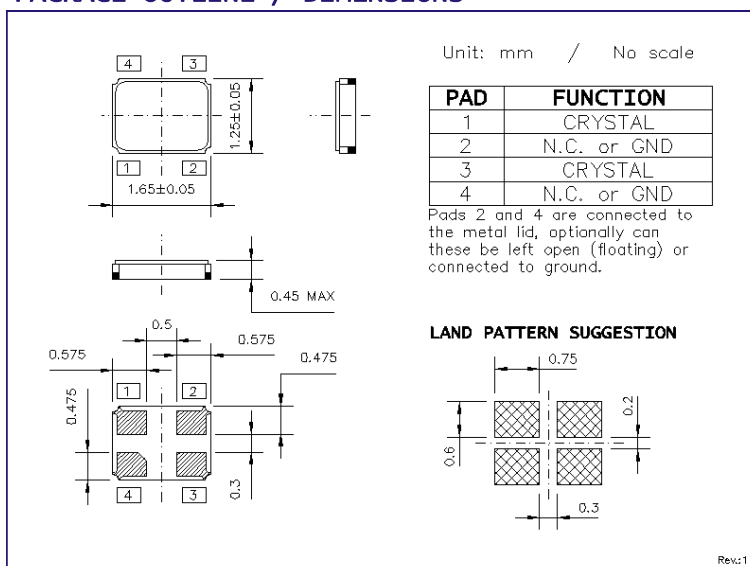
- Ultra-miniature unit dimensions 1.6x1.2x0.42 with 4 pads.
- Highly reliable vacuum seam sealed ceramic package.
- Tight tolerances and stabilities over temperature range.
- Automotive compliance to AEC-Q200 available.
- ROHS compliant, LEAD-FREE and HALOGEN-FREE.

**PRODUCT PHOTO (NOT IN SCALE)**

**APPLICATIONS**

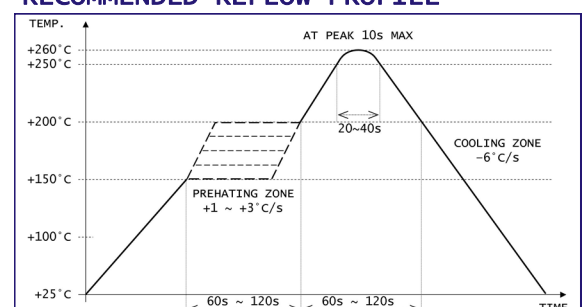
- wireless LAN
- Bluetooth
- Mobil communication
- Handheld equipment

**PRODUCT SPECIFICATIONS**

PARAMETER	0111M4		CONDITIONS / REMARKS
Nominal frequency range	24.000 ~ 60.000MHz		--
Crystal cut and mode	AT-cut / Fundamental		--
Frequency tolerance	±10ppm / ±20ppm / ±30ppm		Other options available.
Frequency stability	±15ppm	±20ppm	Other options available.
Operating temperature range	-20 to +70°C	-30 to +85°C	Other options available.
Equivalent series resistance	<150Ω		24.000 to 25.999MHz
	<125Ω		26.000 to 29.999MHz
	<100Ω		30.000 to 39.999MHz
	<80Ω		40.000 to 60.000MHz
Load capacitance	6 ~ 32pF or SERIES		Please specify.
Shunt capacitance	<3.0pF		--
Drive level	10μW TYP / 100μW MAX		--
Storage temperature range	-55 to +125°C		--

**PACKAGE OUTLINE / DIMENSIONS**

**PACKAGING INFORMATION**

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 8mm.
- Component pitch in carrier 4mm.
- Reel diameter 180mm.
- QTY per reel: 3,000pcs MAX.

**RECOMMENDED REFLOW PROFILE**


单击下面可查看定价，库存，交付和生命周期等信息

[>>HCI\(杭晶\)](#)