Hang Crystal International


OSCILLATOR UNIT
1532P

OSCILLATOR UNIT WITH LVPECL OUTPUT IN SMD 3.2X2.5MM CERAMIC SEAM SEAL PACKAGE.

PRODUCT FEATURES

- Small dimensions 3.2x2.5x1.3 with 6 solder pads.
- Highly reliable seam sealed ceramic package.
- Wide frequency range.
- Low jitter and phase noise.
- RoHS compliant, LEAD-FREE and HALOGEN-FREE.

PRODUCT PHOTO (NOT IN SCALE)

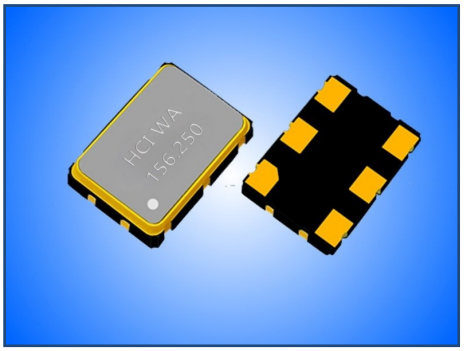

APPLICATIONS


- High speed communication
- Handheld equipment
- Telecom equipment

PRODUCT SPECIFICATIONS

PARAMETER	1532P	CONDITIONS / REMARKS
Nominal frequency range	10 ~ 800MHz	Fund., Overtone or PLL
Supply voltage	$2.5V_{DC}$ / $3.3V_{DC}$	Other option possible
Supply current	100mA	Maximum, Fund mode lower I_{CC}
Frequency stability	±25ppm / ±50ppm / ±100ppm	See note below.
Operating temperature range	-10 to +70°C or -40 to 85°C	Other options available.
Output waveform and load	LVPECL / 50Ω	Into V_{CC}-2
Output voltage level HIGH	V_{CC}-1.025V / V_{CC}-0.880V	Minimum / Maximum
Output voltage level LOW	V_{CC}-1.810V / V_{CC}-1.620V	Minimum / Maximum
Rise and Fall times	1.5ns	@ 20~80~20%V_{CC}
Symmetry (duty cycle)	45~55%	@ outputs cross point
Phase Jitter RMS	<1ps	Integrated 12kHz≤F_J≤20MHz

Note: Stability includes frequency deviations at +25°C, over temperature range, due to supply voltage changes, output load changes, shock and vibration.


PACKAGE OUTLINE / DIMENSIONS

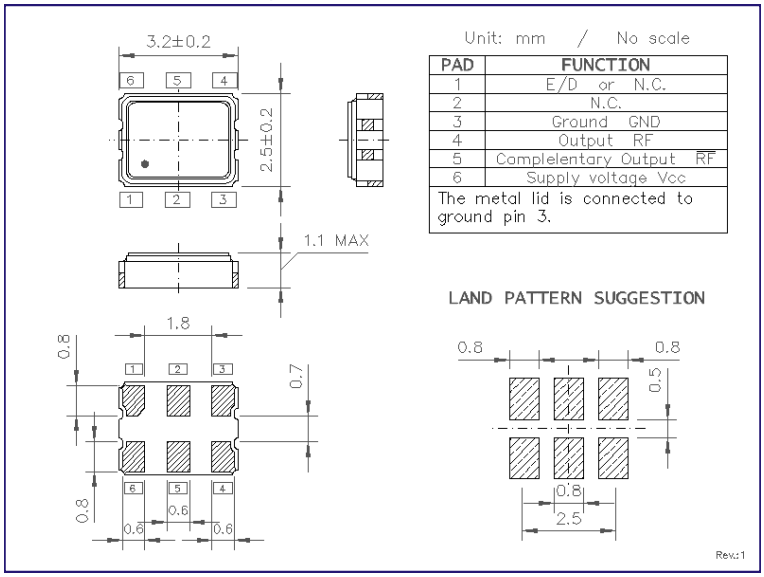

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 8mm.
- Component pitch in carrier 4mm.
- Reel diameter 180mm.
- QTY per reel: 3,000pcs

RECOMMENDED REFLOW PROFILE

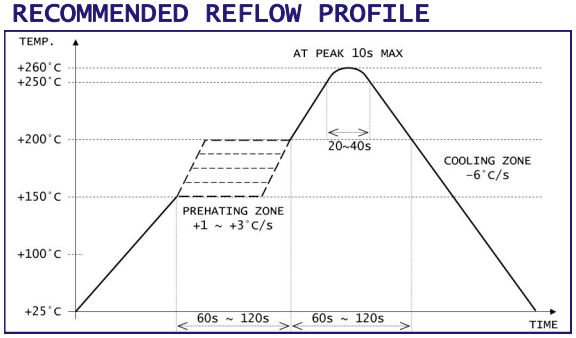

Suzhou HangJing Elec&Tech Co., Ltd. ◆ Http://www.hci.com.hk ◆ No.1,First Qunxing Rd,Suzhou Industrial Park,Jiangsu,China
Telephone:+86 (0)512 6591 66)58 ◆ e-mail: tony@hci.com.hk

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>Hang Crystal International(苏州杭晶电子科技有限公司)

Downloaded From Oneyac.com