




# HSX211SK SERIES

## SEAM SEALING PACKAGE

☑ RoHS Compliant ☑ Pb Free ☑ AEC Qualified

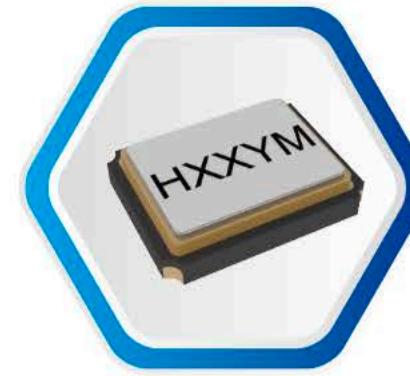

### STANDARD SPECIFICATION

Items	Parameter	
Frequency Range	16~30MHz	30~54MHz
Mode	Fundamental	
Frequency Tolerance (at.25°C)	±7ppm ~ ±10ppm	
Load Capacitance	6pF Min.	
Drive Level	10μW (300μW Max.)	
Equivalent Series Resistance	100Ω Max.	50Ω Max.
Storage Temp. Range	-55 ~ +125°C	

### FREQUENCY STABILITY OVER OPERATING TEMPERATURE RANGE



Operating Temperature	Stability
-40 ~ +85°C	± 15 ppm
-40 ~ +105°C	± 20 ppm
-40 ~ +125°C	± 40 ppm

\*For other specification, please contact us.


Packing Unit : 3,000pcs/Reel.

### DIMENSION

Unit:mm

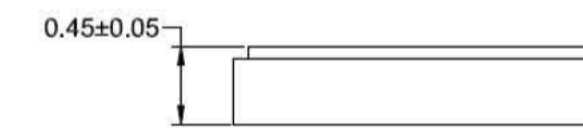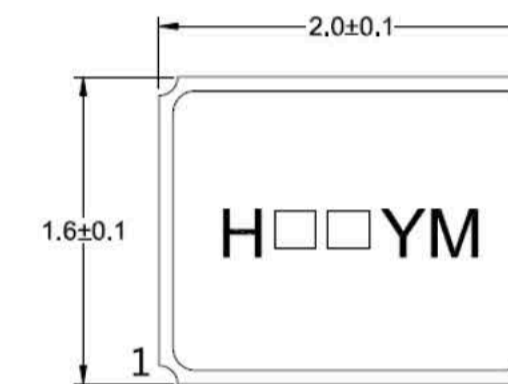


Bottom View

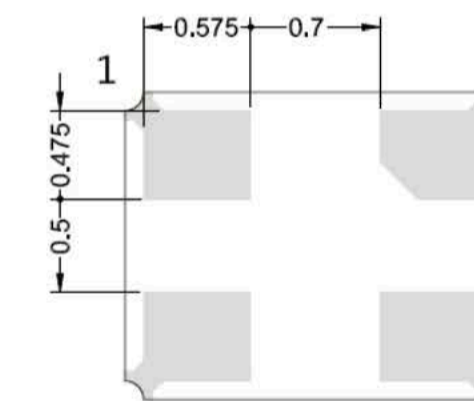


Also available in 2 pin

Pin Connections	
#1	Crystal
#2	GND/Lid
#3	Crystal
#4	GND/Lid

Internal Connection (Top View)

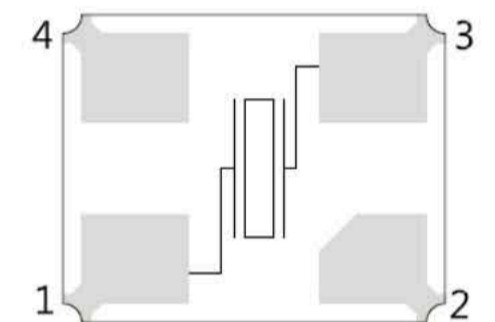

Recommended Land Pattern Tolerance: ±0.1

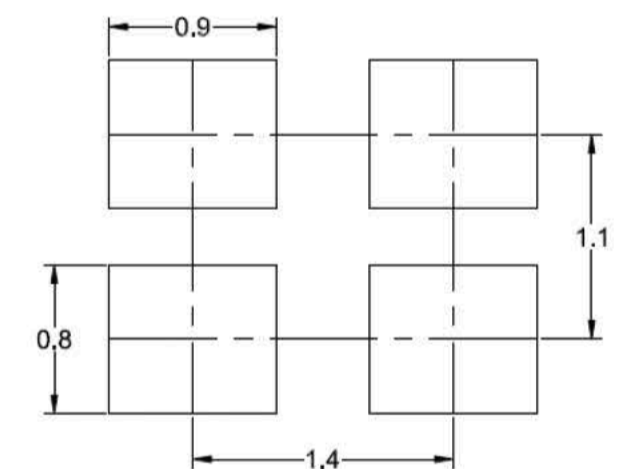

Actual Size □

单击下面可查看定价，库存，交付和生命周期等信息

[>>HELE\(加高\)](#)