


H2TCM2-33X+



10-3000 MHz

50Ω 1:2 Transmission Line Transformer

Features





- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- 260°C Reflow Compatible
- RoHS Compliant and Lead free
- Input Power: 0.40W Max
- DC Current: 30 mA

Applications



- Impedance matching
- Balanced amplifier
- Balun
- Cellular and VHF

Electrical Specifications: TA=25°C, 0dBm, Z0=50Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin6-4)	10-3000MHz	dB	—	2.0	3.5
Main line Loss (Pin6-3)	10-3000MHz	dB	—	1.0	2.0
Amplitude Balance	10-3000MHz	dB	—	2.0	3.0
Phase Balance	10-3000MHz	°	—	8.0	20.0
Input Return Loss(Pin6)	10-3000MHz	dB	15.0	20.0	—

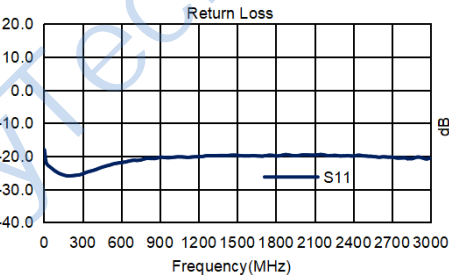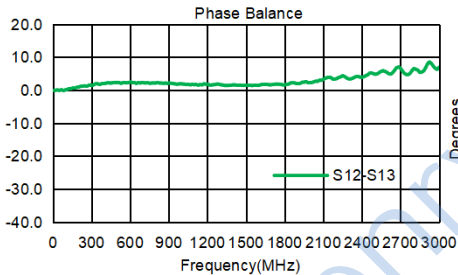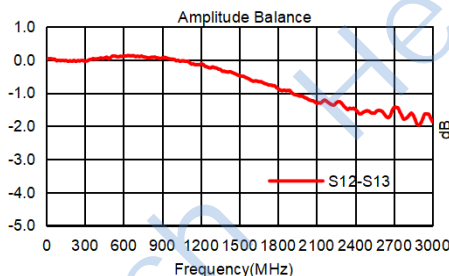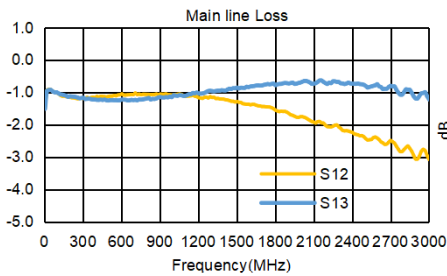


Outline Drawing(mm)




Electrical structure

Fig W

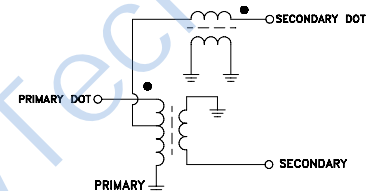

Recommended layout(mm)



Pin Connections

Input	6
Output 1	4
Output 2	3
Ground	2, 5
Not Used	1

单击下面可查看定价，库存，交付和生命周期等信息

[>>HenryTech\(恒利泰\)](#)