

H3-TCM2-452X-2+

20-4000MHz 50Ω 1:2 Balun


APPLICATIONS

Ideally suitable for PCS, wideband push-pull amplifiers and cellular applications.

FEATURES


- Surface mount
- Impedance ratio: 1:2
- Balanced transmission line
- RoHS compliant
- 260°C reflow compatible

DIMENSIONS



A	B	C
4.30	4.30	3.00
D		
1.27		

Land Pattern



E	F	G
1.40	0.76	1.27
H		
4.83		


Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05


ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0 (P1 / P2 / P3)			50/75/75		Ohm
Insertion Loss	20-4000MHz		1.8	2.5	dB
Phase Balance	20-4000MHz		10.0		Deg
Amplitude Balance	20-4000MHz		0.5		dB

TEST CURVE

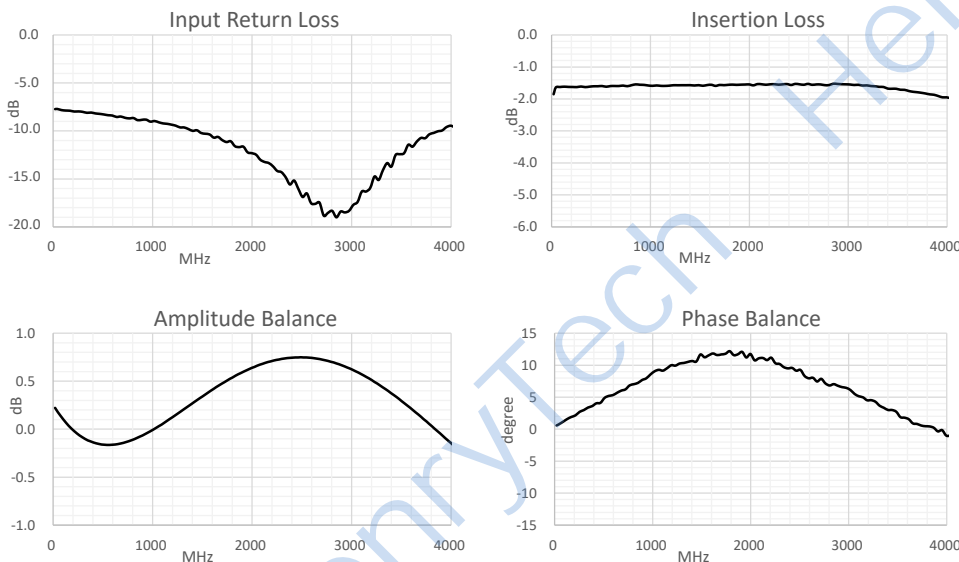


FUNCTIONAL SCHEMATIC

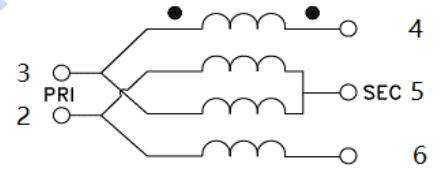

PIN CONFIGURATION

Pin No.	Function
1	Not used(ground)
2	Primary(Ground)
3	Primary Dot
4	Secondary Dot
5	Ground
6	Secondary

APPLICATION & TEST CIRCUIT

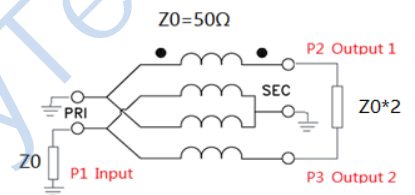

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
RF Power	0.4W
DC Current	30mA
Operating Temperature Range	-40 to 85°C
Storage Temperature Range	-55 to 100°C

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Adress: No.198 Tianqin East Street, Gaoxin W Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

[>>HenryTech\(恒利泰\)](#)