


**H2TCD-9-1W+**



5-2000MHz

50Ω 9dB Directional Coupler

**Features**





- Operating temperature range: -40℃ to +125℃
- Storage temperature range: -55℃ to +125℃
- 260℃ Reflow Compatible
- RoHS compliant and lead free
- Input Power: 1.0W
- DC Current: 250mA

**Applications**


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

**Electrical Specifications:TA=25℃, 0dBm, Z0=50Ω**


Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(pin3-1)	5-2000MHz	dB	8.0	9.0	9.5
Main line Loss(pin3-4)	5-2000MHz	dB	—	2.2	3.0
Input Return Loss(pin 3)	5-2000MHz	dB	10.0	16.0	—
Coupling Return Loss(pin1)	5-2000MHz	dB	10.0	16.0	—
Output Return Loss(pin4)	5-2000MHz	dB	16.0	20.0	—
Isolation(pin6-3)	5-2000MHz	dB	12.0	18.0	—

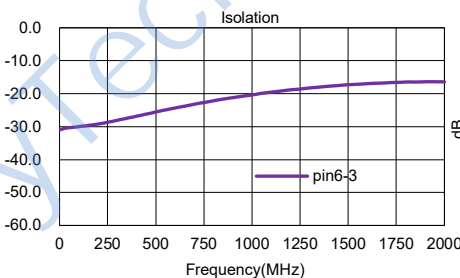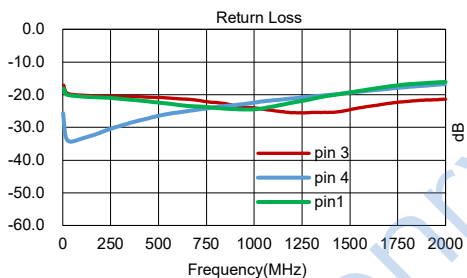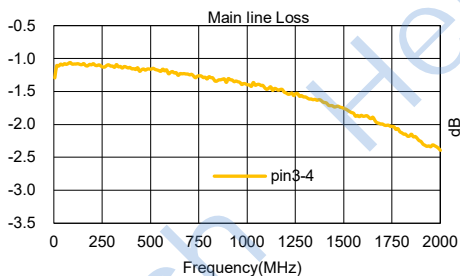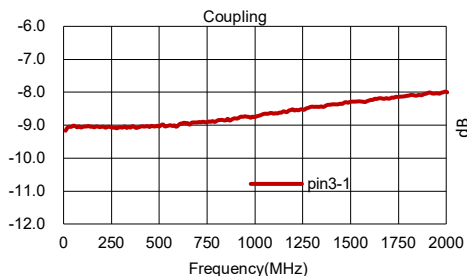


**Outline Drawing(mm)**

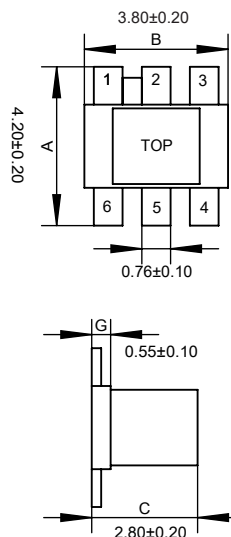

**Electrical structure**



**Recommended layout(mm)**



**Pin Connections**

Input	3
Coupling	1
Output	4
Ground	2
Isolation	6
NOT USED	5

## H2TCD-9-1W+



5-2000MHz

75Ω 9dB Directional Coupler

### Features





- Operating temperature range: -40 °C to +125 °C
- Storage temperature range: -55 °C to +125 °C
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Input Power: 1.0W
- DC Current: 250mA

### Applications


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

### Electrical Specifications: TA=25 °C, 0dBm, Z0=75Ω


Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(pin3-1)	5-2000MHz	dB	8.0	9.0	10.0
Main line Loss(pin3-4)	5-2000MHz	dB	—	2.2	3.0
Input Return Loss(pin 3)	5-2000MHz	dB	10.0	16.0	—
Coupling Return Loss(pin1)	5-2000MHz	dB	10.0	16.0	—
Output Return Loss(pin4)	5-2000MHz	dB	10.0	16.0	—
Isolation(pin6-3)	5-2000MHz	dB	16.0	20.0	—

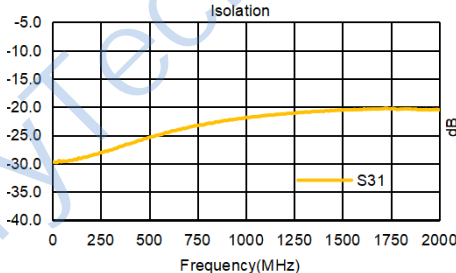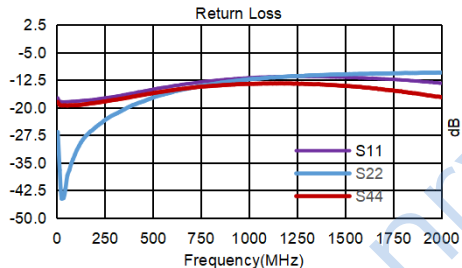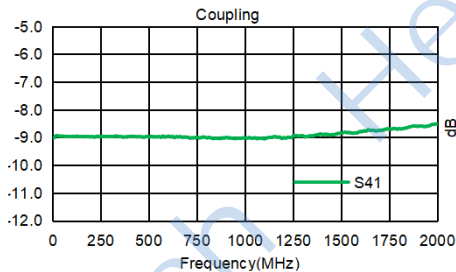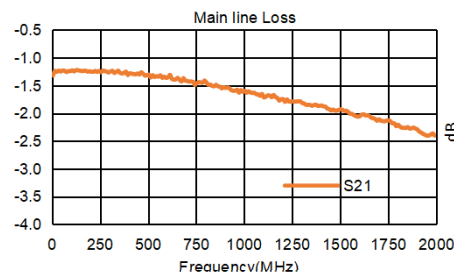


### Outline Drawing(mm)

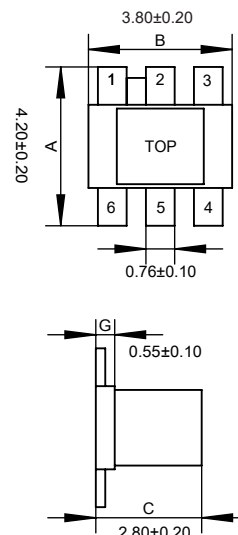

### Electrical structure



### Recommended layout(mm)



### Pin Connections

Input	3
Coupling	1
Output	4
Ground	2
Isolation	6
NOT USED	5

单击下面可查看定价，库存，交付和生命周期等信息

[>>HenryTech\(恒利泰\)](#)