


REV	DOCUMENT	CHANGED BY	CHECK
6	202793	GRT 10APR01	SAV
7	204628	GRT 3 JAN 02	SAV

2X ϕ .094

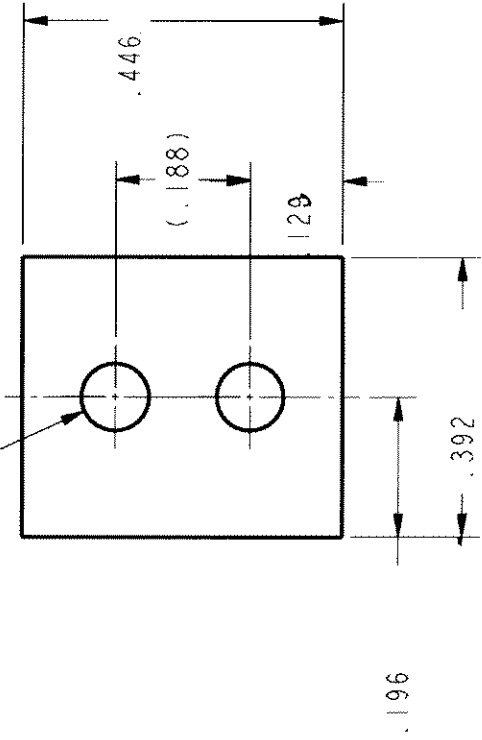

NOTES
 - MOUNTING HOLES MUST ACCEPT PINS OR SCREWS OF ϕ .087 MAX ON $.188 \pm .002$ CENTERS
 - MATERIAL: NEOPRENE COATED FIBERGLASS CLOTH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	<input checked="" type="checkbox"/> US (inch)	<input type="checkbox"/> METRIC
NO PLACE	$\pm .040$	± 1
ONE PLACE	$\pm .030$	$\pm 0,4$
TWO PLACE	$\pm .015$	$\pm 0,15$
THREE PLACE	$\pm .005$	\pm
ANGLES	\pm	\pm
RAW MATERIAL - COMMERCIAL STANDARD		

THIRD ANGLE PROJECTION



DRAWN	GRT	10APR01
CHECK	SAV	10APR01
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
PTC3D	ASME Y14.5M-1994	

Honeywell	
Sensing and Control	
TITLE	
INSULATOR, ELECTRICAL	
SIZE DWG TYPE	DRAWING NAME
A	JX-10131
SCALE 4 :	WEIGHT
SHEET OF	
4 5	

REV	7
SIZE DWG TYPE	DRAWING NAME
A	JX-10131
SCALE 4 :	WEIGHT
SHEET OF	
4 5	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Honeywell\(霍尼韦尔\)](#)