

ISEI-12
ISSUE 5

ISEI-12
PAGE 1 OF 1

M

DRAWING NUMBER

X

10

ISSUE

9

8

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO 16449	D A W	12 JAN 62
B	CO-34213	J A L	24 SEPT 74
C	CO 51463-G	WJM	27 JUL 83
D	CO57041A	CJH	21 MAR 85
E	CO94274	DLM	MAR 99

CHECK


27 FEB 62

CHECK

D A W 12 JAN 62

FORMTEK

FO-50378

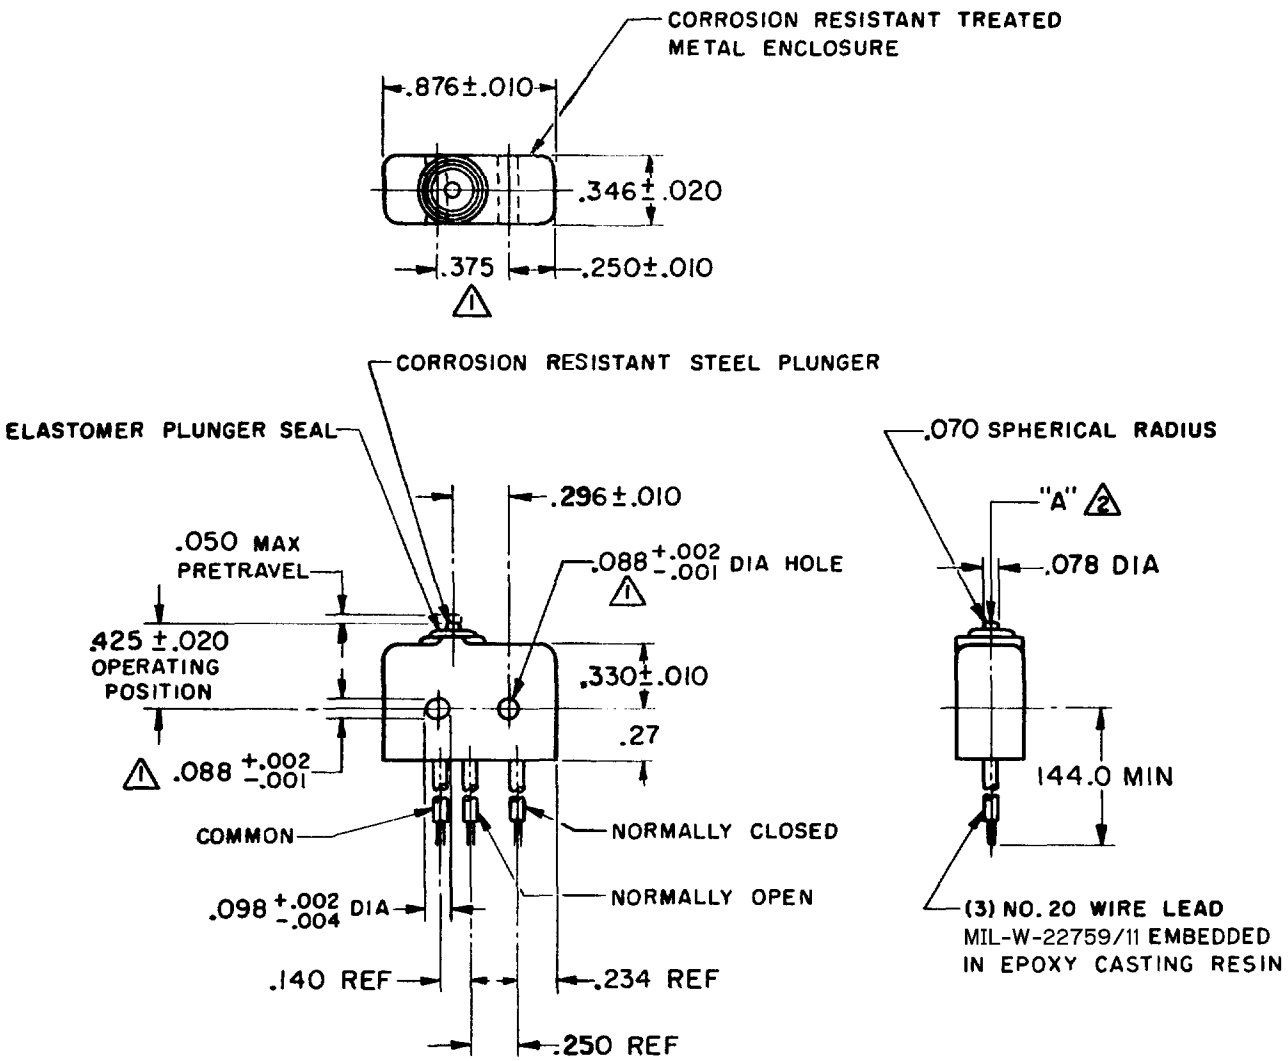

NOTE -
 1 MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ± .002 CENTERS
 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 3 WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 4.65 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	
OVERTRAVEL ----- .003 MIN	RESISTIVE ----- SEA LEVEL ----- 5 AMP	
	50,000 FT ----- 2.5 AMP	
	50,000 FT ----- 5 AMP	
	----- 24 AMP	
		WEIGHT 3

单击下面可查看定价，库存，交付和生命周期等信息

[>>Honeywell\(霍尼韦尔\)](#)