
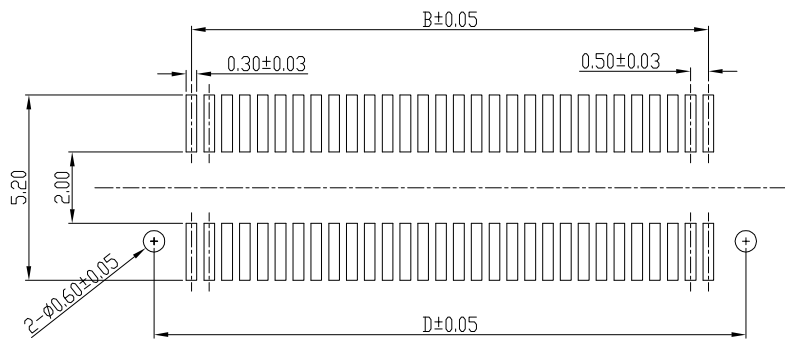
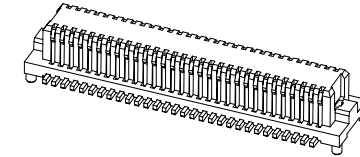

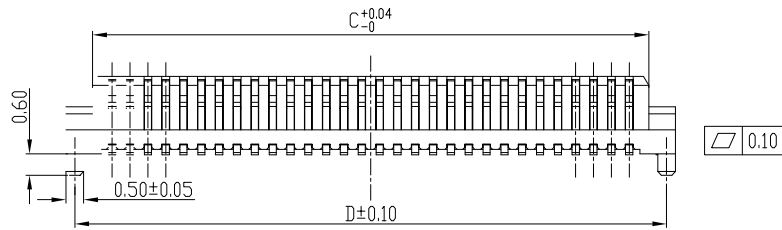



Engineer Drawing



Note:
 Electrical
 Current Rating:0.5A max
 Contact Resistance:50mΩ max(Initial),75mΩ max(After)
 Dielectric Withstanding Voltage:150VAC
 Insulation Resistance 500mega ohms min. at 100 VDC
 Physical
 Housing:thermoplastic, UL 94V-0 rated,inWhite Color
 Contact: Copper alloy
 Operating Temperature:-40°C to +85°C

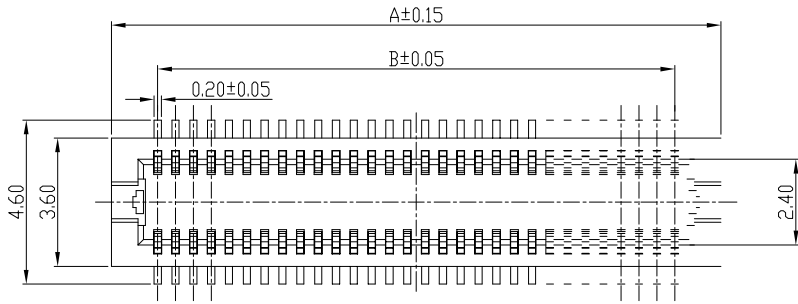

RECOMMENDED PCB LAYOUT(TOP VIEW)

- IPC B05301 * ** * * *
- ① ② ③ ④ ⑤ ⑥
- ① Series Type ④ Serial code
 ② Type ⑤ Company code.
 ③ Pin code. ⑥ Serial code

	A	B	C	D
10 PIN	4.60	2.00	3.10	4.10
12 PIN	5.10	2.50	3.60	4.60
14 PIN	5.60	3.00	4.10	5.10
20 PIN	7.10	4.50	5.60	6.60
22 PIN	7.60	5.00	6.10	7.10
24 PIN	8.10	5.50	6.60	7.60
30 PIN	9.60	7.00	8.10	9.10
32 PIN	10.10	7.50	8.60	9.60
36 PIN	11.10	8.50	9.60	10.60
40 PIN	12.10	9.50	10.60	11.60
50 PIN	14.60	12.00	13.10	14.10
60 PIN	17.10	14.50	15.60	16.60
80 PIN	22.10	19.50	20.60	21.60

TOLERANCE X ±0.5 XX ±0.25 X ± 0.35 .XXX ± 0.15 ANGLES ± 0.3° UNLESS OTHERWISE SPECIFIED			www. i-ncp. com	
	PART NO. IPC B05301 xx		TITLE: 0.5mm Borad to Borad H=3.0mm male	
	DRAWING NO. IPC B05301			
	 SHEET 1 OF 1	UNITS mm	SCALE 1:1	REV. 01

单击下面可查看定价，库存，交付和生命周期等信息

[>>INCP](#)