
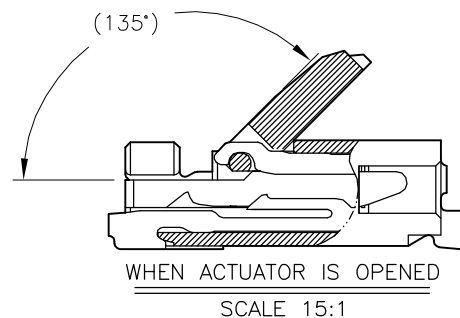
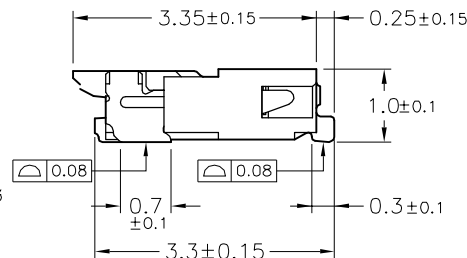
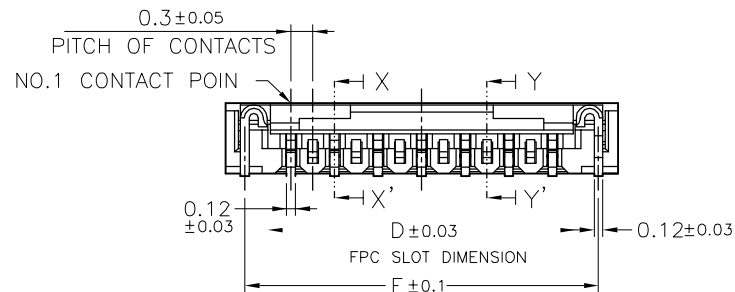
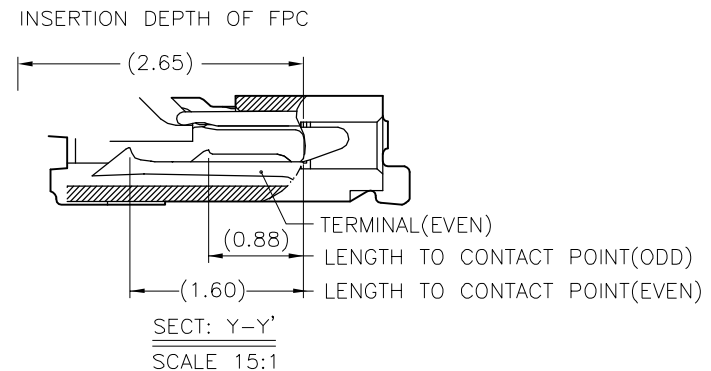
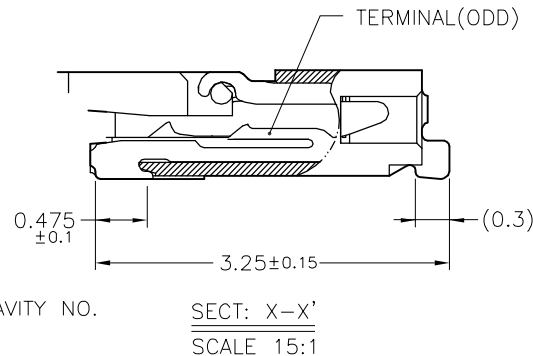


# Engineer Drawing

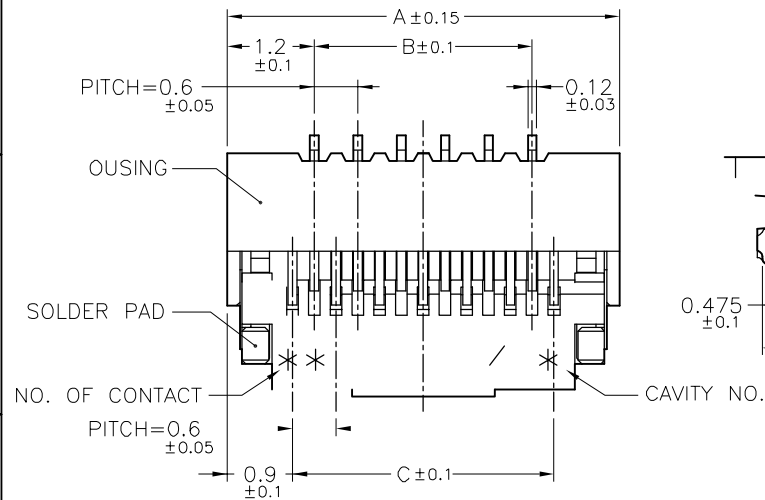

## NOTE:

### 1.MATERIAL:

HOUSING:LCP(UL 94V-0)  
ACTUATOR:LCP(UL 94V-0)  
TERMINAL:PHOSPHOR BRONZE  
STOPPER:PHOSPHOR BRONZE

### 2.PLATING:

TERMINAL:SEE ORDERING INFORMATION  
STOPPER:TIN OVER NICKEL(LEAD FREE)

### 3.RATING:

OPERATING VOLTAGE:30V  
CURRENT RATING:0.2A  
OPERATING TEMPERATURE:-55°C ~ +85°C

IPFP03101 \*\* \* \* \* \*

- ① Series Type
- ② Pin code.
- ③ Plating
- ④ Company code.
- ⑤ Packing
- ⑥ Lead Free HF

| NO. OF CONTACTS | PART NUMBER | DIM. A | DIM. B | DIM. C | DIM. D | DIM. E |
|-----------------|-------------|--------|--------|--------|--------|--------|
| 09              | 09RL        | 4.2    | 1.8    | 2.4    | 3.03   | 3.7    |
| 11              | 11RL        | 4.8    | 2.4    | 3.0    | 3.63   | 4.3    |
| 13              | 13RL        | 5.4    | 3.0    | 3.6    | 4.23   | 4.9    |
| 15              | 15RL        | 6.0    | 3.6    | 4.2    | 4.83   | 5.5    |
| 17              | 17RL        | 6.6    | 4.2    | 4.8    | 5.43   | 6.1    |
| 19              | 19RL        | 7.2    | 4.8    | 5.4    | 6.03   | 6.7    |
| 21              | 21RL        | 7.8    | 5.4    | 6.0    | 6.63   | 7.3    |
| 23              | 23RL        | 8.4    | 6.0    | 6.6    | 7.23   | 7.9    |
| 25              | 25RL        | 9.0    | 6.6    | 7.2    | 7.83   | 8.5    |
| 27              | 27RL        | 9.6    | 7.2    | 7.8    | 8.43   | 9.1    |
| 29              | 29RL        | 10.2   | 7.8    | 8.4    | 9.03   | 9.7    |
| 31              | 31RL        | 10.8   | 8.4    | 9.0    | 9.63   | 10.3   |
| 33              | 33RL        | 11.4   | 9.0    | 9.6    | 10.23  | 10.9   |
| 35              | 35RL        | 12.0   | 9.6    | 10.2   | 10.83  | 11.5   |
| 37              | 37RL        | 12.6   | 10.2   | 10.8   | 11.43  | 12.1   |
| 39              | 39RL        | 13.2   | 10.8   | 11.4   | 12.03  | 12.7   |
| 41              | 41RL        | 13.8   | 11.4   | 12.0   | 12.63  | 13.3   |
| 43              | 43RL        | 14.4   | 12.0   | 12.6   | 13.23  | 13.9   |
| 45              | 45RL        | 15.0   | 12.6   | 13.2   | 13.83  | 14.5   |
| 49              | 49RL        | 16.2   | 13.8   | 14.4   | 15.03  | 15.7   |
| 51              | 51RL        | 16.8   | 14.4   | 15.0   | 15.63  | 16.3   |
| 57              | 57RL        | 18.6   | 16.2   | 16.8   | 17.43  | 18.1   |
| 61              | 61RL        | 19.8   | 17.4   | 18.0   | 18.63  | 19.3   |
| 67              | 67RL        | 21.6   | 19.2   | 19.8   | 20.43  | 21.1   |
| 71              | 71RL        | 22.8   | 20.4   | 21.0   | 21.63  | 22.3   |

## TOLERANCE

X  $\pm 0.5$  XX  $\pm 0.12$   
X  $\pm 0.25$  XXX  $\pm 0.05$   
ANGLES  $\pm 3^\circ$

UNLESS OTHERWISE SPECIFIED

**NCP**

[www.i-ncp.com](http://www.i-ncp.com)

PART NO.  
IPFP03101 xx  
DRAWING NO.  
IPFP03101

TITLE:  
0.3mm Pitch FPC Conn E/O (H=1.0)




SHEET 1 OF 3

UNITS mm


SCALE 1:1

REV. 01

# Engineer Drawing

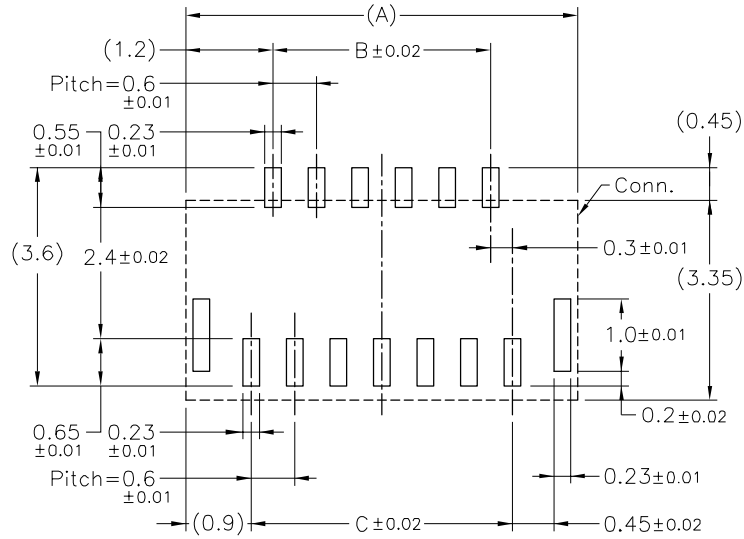

## RECOMMENDED METAL MASK PATTERN

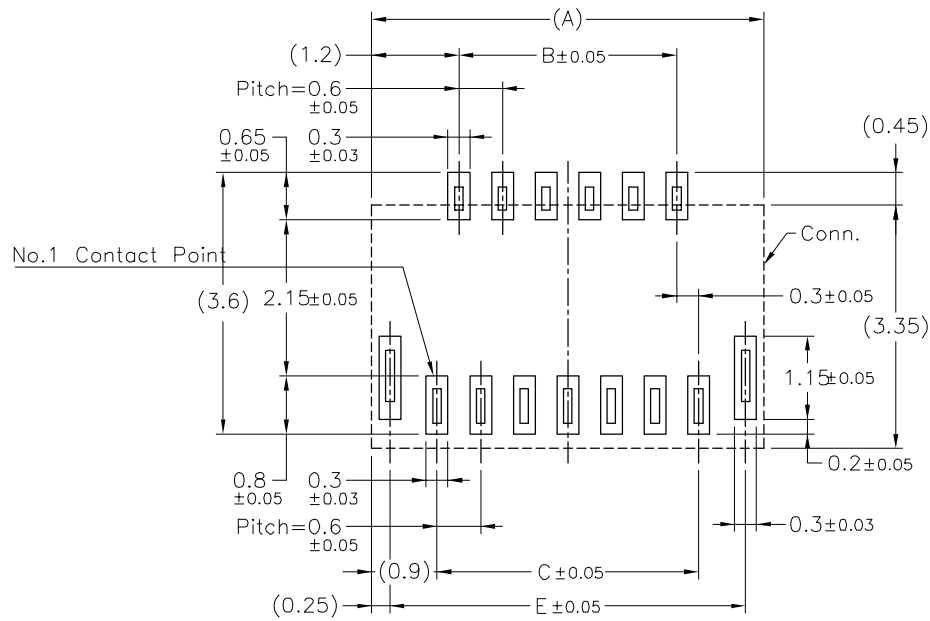

FPC/FFC INSERT DIRECTION  
PCB LAYOUT

| NO. OF CONTACTS | PART NUMBER | DIM. A | DIM. B | DIM. C | DIM. E |
|-----------------|-------------|--------|--------|--------|--------|
| 09              | 09RL        | 4.2    | 1.8    | 2.4    | 3.7    |
| 11              | 11RL        | 4.8    | 2.4    | 3.0    | 4.3    |
| 13              | 13RL        | 5.4    | 3.0    | 3.6    | 4.9    |
| 15              | 15RL        | 6.0    | 3.6    | 4.2    | 5.5    |
| 17              | 17RL        | 6.6    | 4.2    | 4.8    | 6.1    |
| 19              | 19RL        | 7.2    | 4.8    | 5.4    | 6.7    |
| 21              | 21RL        | 7.8    | 5.4    | 6.0    | 7.3    |
| 23              | 23RL        | 8.4    | 6.0    | 6.6    | 7.9    |
| 25              | 25RL        | 9.0    | 6.6    | 7.2    | 8.5    |
| 27              | 27RL        | 9.6    | 7.2    | 7.8    | 9.1    |
| 29              | 29RL        | 10.2   | 7.8    | 8.4    | 9.7    |
| 31              | 31RL        | 10.8   | 8.4    | 9.0    | 10.3   |
| 33              | 33RL        | 11.4   | 9.0    | 9.6    | 10.9   |
| 35              | 35RL        | 12.0   | 9.6    | 10.2   | 11.5   |
| 37              | 37RL        | 12.6   | 10.2   | 10.8   | 12.1   |
| 39              | 39RL        | 13.2   | 10.8   | 11.4   | 12.7   |
| 41              | 41RL        | 13.8   | 11.4   | 12.0   | 13.3   |
| 43              | 43RL        | 14.4   | 12.0   | 12.6   | 13.9   |
| 45              | 45RL        | 15.0   | 12.6   | 13.2   | 14.5   |
| 49              | 49RL        | 16.2   | 13.8   | 14.4   | 15.7   |
| 51              | 51RL        | 16.8   | 14.4   | 15.0   | 16.3   |
| 57              | 57RL        | 18.6   | 16.2   | 16.8   | 18.1   |
| 61              | 61RL        | 19.8   | 17.4   | 18.0   | 19.3   |
| 67              | 67RL        | 21.6   | 19.2   | 19.8   | 21.1   |
| 71              | 71RL        | 22.8   | 20.4   | 21.0   | 22.3   |

### TOLERANCE

X  $\pm 0.5$  XX  $\pm 0.12$   
X  $\pm 0.25$  XXX  $\pm 0.05$   
ANGLES  $\pm 3^\circ$

UNLESS OTHERWISE SPECIFIED

**NCP**

[www.i-ncp.com](http://www.i-ncp.com)

PART NO.  
IPFP03101 xx  
DRAWING NO.  
IPFP03101

TITLE:  
0.3mm Pitch FPC Conn E/O (H=1.0)




SHEET 2 OF 3

UNITS mm

SCALE 1:1

REV. 01

# Engineer Drawing

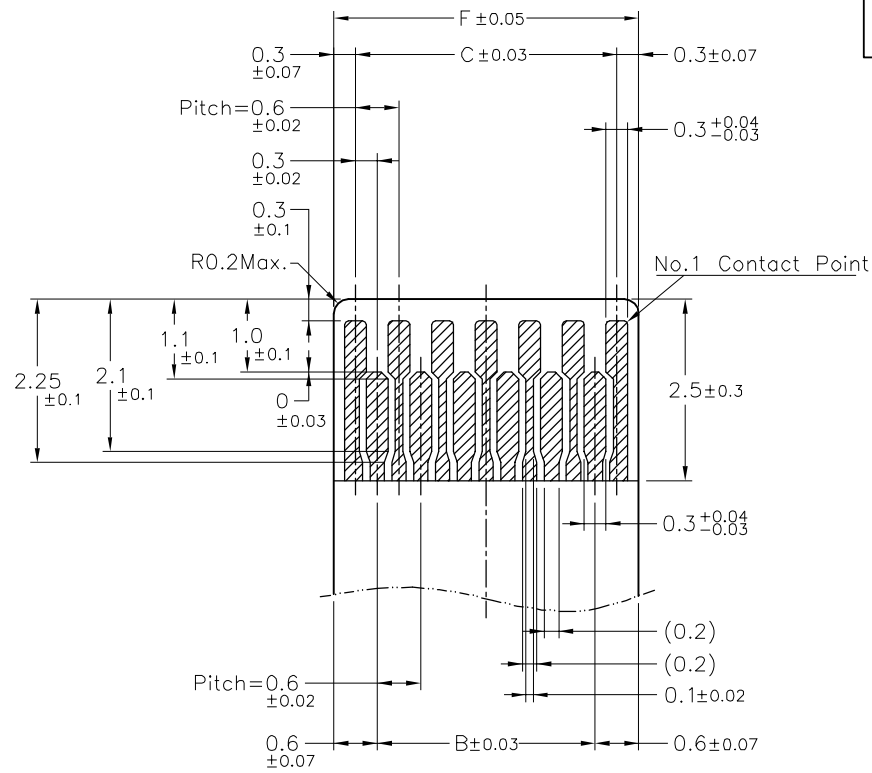

| NO. OF CONTACTS | PART NUMBER | DIM. A | DIM. B | DIM. C | DIM. E |
|-----------------|-------------|--------|--------|--------|--------|
| 09              | 09RL        | 4.2    | 1.8    | 2.4    | 3.7    |
| 11              | 11RL        | 4.8    | 2.4    | 3.0    | 4.3    |
| 13              | 13RL        | 5.4    | 3.0    | 3.6    | 4.9    |
| 15              | 15RL        | 6.0    | 3.6    | 4.2    | 5.5    |
| 17              | 17RL        | 6.6    | 4.2    | 4.8    | 6.1    |
| 19              | 19RL        | 7.2    | 4.8    | 5.4    | 6.7    |
| 21              | 21RL        | 7.8    | 5.4    | 6.0    | 7.3    |
| 23              | 23RL        | 8.4    | 6.0    | 6.6    | 7.9    |
| 25              | 25RL        | 9.0    | 6.6    | 7.2    | 8.5    |
| 27              | 27RL        | 9.6    | 7.2    | 7.8    | 9.1    |
| 29              | 29RL        | 10.2   | 7.8    | 8.4    | 9.7    |
| 31              | 31RL        | 10.8   | 8.4    | 9.0    | 10.3   |
| 33              | 33RL        | 11.4   | 9.0    | 9.6    | 10.9   |
| 35              | 35RL        | 12.0   | 9.6    | 10.2   | 11.5   |
| 37              | 37RL        | 12.6   | 10.2   | 10.8   | 12.1   |
| 39              | 39RL        | 13.2   | 10.8   | 11.4   | 12.7   |
| 41              | 41RL        | 13.8   | 11.4   | 12.0   | 13.3   |
| 43              | 43RL        | 14.4   | 12.0   | 12.6   | 13.9   |
| 45              | 45RL        | 15.0   | 12.6   | 13.2   | 14.5   |
| 49              | 49RL        | 16.2   | 13.8   | 14.4   | 15.7   |
| 51              | 51RL        | 16.8   | 14.4   | 15.0   | 16.3   |
| 57              | 57RL        | 18.6   | 16.2   | 16.8   | 18.1   |
| 61              | 61RL        | 19.8   | 17.4   | 18.0   | 19.3   |
| 67              | 67RL        | 21.6   | 19.2   | 19.8   | 21.1   |
| 71              | 71RL        | 22.8   | 20.4   | 21.0   | 22.3   |

## TOLERANCE

X  $\pm 0.5$  XX  $\pm 0.12$   
X  $\pm 0.25$  XXX  $\pm 0.05$   
ANGLES  $\pm 3^\circ$

UNLESS OTHERWISE SPECIFIED

**NCP**

[www.i-ncp.com](http://www.i-ncp.com)

PART NO.  
IPFP03101 xx  
DRAWING NO.  
IPFP03101

TITLE:  
0.3mm Pitch FPC Conn E/O (H=1.0)



SHEET 3 OF 3

UNITS mm

SCALE 1:1

REV. 01

单击下面可查看定价，库存，交付和生命周期等信息

[>>INCP](#)