


**SIPMOS® Power-Transistor**
**Features**

- P-Channel
- Enhancement mode
- Avalanche rated
- $dv/dt$  rated
- Pb-free lead plating; RoHS compliant
- Qualified according to AEC Q101
- Halogen-free according to IEC61249-2-21

**Product Summary**

Drain source voltage	$V_{DS}$	-60	V
Drain-source on-state resistance	$R_{DS(on)}$	0.13	$\Omega$
Continuous drain current	$I_D$	-3.44	A

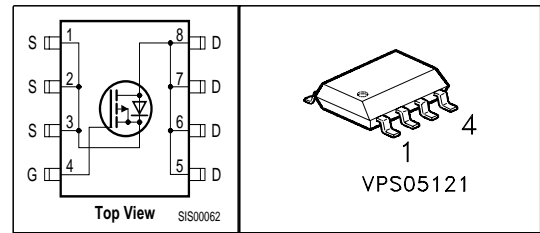

<b>Type</b>	<b>Package</b>	<b>Lead free</b>
BSO613SPV G	PG-SO 8	Yes


**Maximum Ratings, at  $T_j = 25\text{ °C}$ , unless otherwise specified**

Parameter	Symbol	Value	Unit
Continuous drain current $T_A = 25\text{ °C}$	$I_D$	-3.44	A
Pulsed drain current $T_A = 25\text{ °C}$	$I_{D\text{ puls}}$	-13.8	
Avalanche energy, single pulse $I_D = -3.44\text{ A}$ , $V_{DD} = -25\text{ V}$ , $R_{GS} = 25\text{ }\Omega$	$E_{AS}$	150	mJ
Avalanche energy, periodic limited by $T_{jmax}$	$E_{AR}$	0.25	
Reverse diode $dv/dt$ $I_S = -3.44\text{ A}$ , $V_{DS} = -48\text{ V}$ , $di/dt = 200\text{ A}/\mu\text{s}$ , $T_{jmax} = 150\text{ °C}$	$dv/dt$	6	kV/ $\mu\text{s}$
Gate source voltage	$V_{GS}$	$\pm 20$	V
Power dissipation $T_A = 25\text{ °C}$	$P_{tot}$	2.5	W
Operating and storage temperature	$T_j, T_{stg}$	-55... +150	$\text{°C}$
IEC climatic category; DIN IEC 68-1		55/150/56	

**Thermal Characteristics**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - soldering point (Pin 4)	$R_{thJS}$	-	-	25	K/W
SMD version, device on PCB: @ min. footprint; $t \leq 10$ sec. @ 6 cm <sup>2</sup> cooling area <sup>1)</sup> ; $t \leq 10$ sec.	$R_{thJA}$	-	-	100	K/W
		-	-	50	

**Electrical Characteristics, at  $T_j = 25$  °C, unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Drain- source breakdown voltage $V_{GS} = 0$ V, $I_D = -250$ $\mu$ A	$V_{(BR)DSS}$	-60	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 1$ mA	$V_{GS(th)}$	-2.1	-3	-4	
Zero gate voltage drain current $V_{DS} = -60$ V, $V_{GS} = 0$ V, $T_j = 25$ °C $V_{DS} = -60$ V, $V_{GS} = 0$ V, $T_j = 125$ °C	$I_{DSS}$	-	-0.1	-1	$\mu$ A
Gate-source leakage current $V_{GS} = -20$ V, $V_{DS} = 0$ V	$I_{GSS}$	-	-10	-100	nA
Drain-source on-state resistance $V_{GS} = -10$ V, $I_D = -3.44$ A	$R_{DS(on)}$	-	0.11	0.13	$\Omega$

<sup>1</sup>Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70  $\mu$ m thick) copper area for drain connection. PCB is vertical without blown air.

**Electrical Characteristics, at  $T_j = 25\text{ °C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Dynamic Characteristics</b>					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ , $I_D = -3.44\text{ A}$	$g_{fs}$	2.2	4.4	-	S
Input capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = -25\text{ V}$ , $f = 1\text{ MHz}$	$C_{iss}$	-	700	875	pF
Output capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = -25\text{ V}$ , $f = 1\text{ MHz}$	$C_{oss}$	-	235	295	
Reverse transfer capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = -25\text{ V}$ , $f = 1\text{ MHz}$	$C_{rss}$	-	95	120	
Turn-on delay time $V_{DD} = -30\text{ V}$ , $V_{GS} = -10\text{ V}$ , $I_D = -3.44\text{ A}$ , $R_G = 2.7\text{ }\Omega$	$t_{d(on)}$	-	10	15	ns
Rise time $V_{DD} = -30\text{ V}$ , $V_{GS} = -10\text{ V}$ , $I_D = -3.44\text{ A}$ , $R_G = 2.7\text{ }\Omega$	$t_r$	-	11	16.5	
Turn-off delay time $V_{DD} = -30\text{ V}$ , $V_{GS} = -10\text{ V}$ , $I_D = -3.44\text{ A}$ , $R_G = 2.7\text{ }\Omega$	$t_{d(off)}$	-	32	48	
Fall time $V_{DD} = -30\text{ V}$ , $V_{GS} = -10\text{ V}$ , $I_D = -3.44\text{ A}$ , $R_G = 2.7\text{ }\Omega$	$t_f$	-	12	18	


**Electrical Characteristics, at  $T_j = 25\text{ °C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Dynamic Characteristics</b>					
Gate to source charge $V_{DD} = -48\text{ V}$ , $I_D = -3.44\text{ A}$	$Q_{gs}$	-	1.6	2.4	nC
Gate to drain charge $V_{DD} = -48\text{ V}$ , $I_D = -3.44\text{ A}$	$Q_{gd}$	-	10	15	
Gate charge total $V_{DD} = -48\text{ V}$ , $I_D = -3.44\text{ A}$ , $V_{GS} = 0\text{ to }-10\text{ V}$	$Q_g$	-	20	30	
Gate plateau voltage $V_{DD} = -48\text{ V}$ , $I_D = -3.44\text{ A}$	$V_{(plateau)}$	-	-3.74	-	V

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Reverse Diode</b>					
Inverse diode continuous forward current $T_A = 25\text{ °C}$	$I_S$	-	-	-3.44	A
Inverse diode direct current,pulsed $T_A = 25\text{ °C}$	$I_{SM}$	-	-	-13.8	
Inverse diode forward voltage $V_{GS} = 0\text{ V}$ , $I_F = -3.44\text{ A}$	$V_{SD}$	-	-0.87	-1.16	V
Reverse recovery time $V_R = -30\text{ V}$ , $I_F = I_S$ , $di_F/dt = 100\text{ A}/\mu\text{s}$	$t_{rr}$	-	56	84	ns
Reverse recovery charge $V_R = -30\text{ V}$ , $I_F = I_S$ , $di_F/dt = 100\text{ A}/\mu\text{s}$	$Q_{rr}$	-	38	57	nC

**Power Dissipation**


$$P_{\text{tot}} = f(T_A)$$

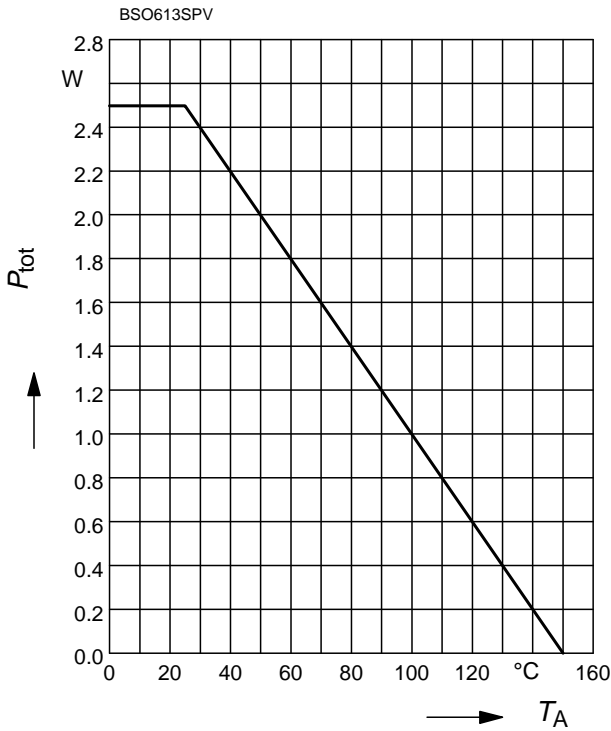

**Drain current**

$$I_D = f(T_A)$$


parameter:  $V_{GS} \geq 10 \text{ V}$

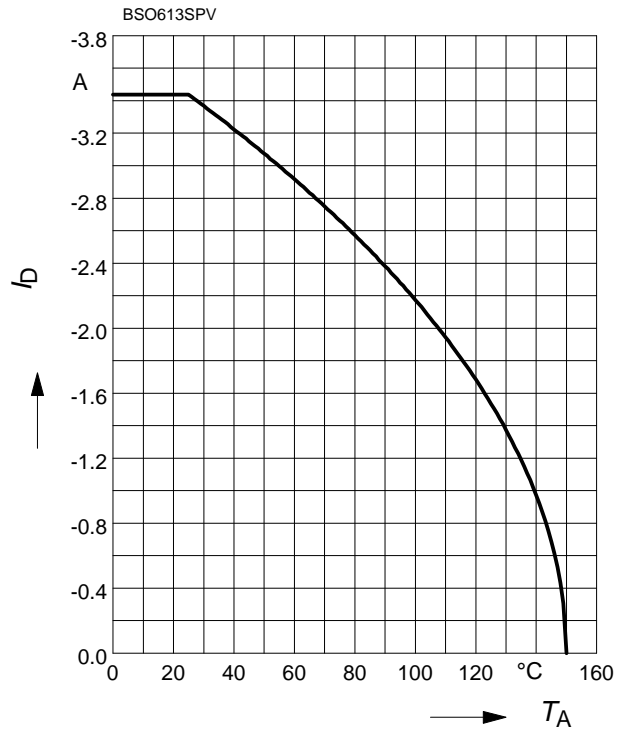

**Safe operating area**

$$I_D = f(V_{DS})$$


parameter :  $D = 0$  ,  $T_A = 25 \text{ °C}$

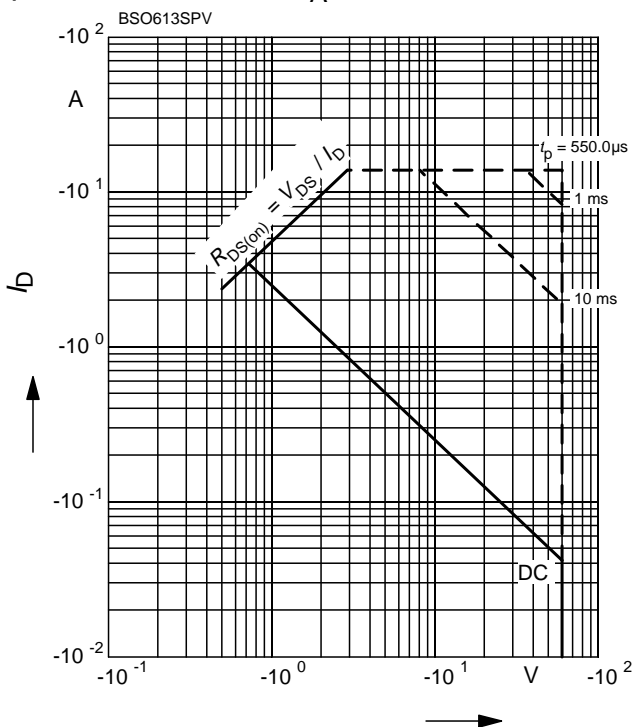

**Transient thermal impedance**

$$Z_{\text{thJC}} = f(t_p)$$


parameter :  $D = t_p/T$

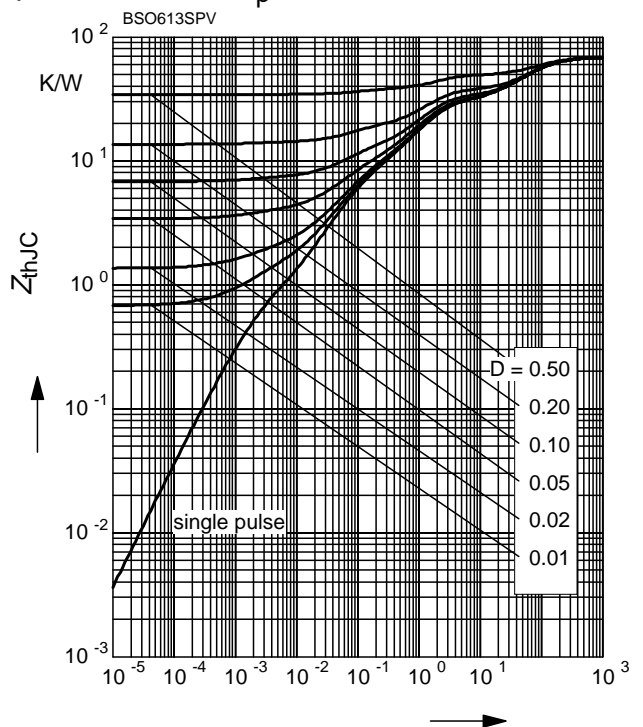

**Typ. output characteristic**

$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$


parameter:  $t_p = 80 \mu\text{s}$

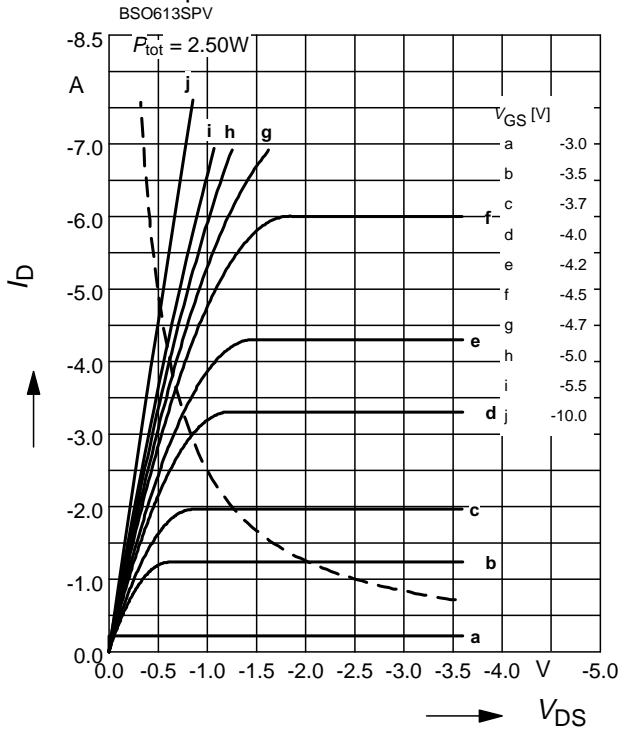

**Typ. drain-source-on-resistance**

$R_{DS(on)} = f(I_D)$


parameter:  $V_{GS}$

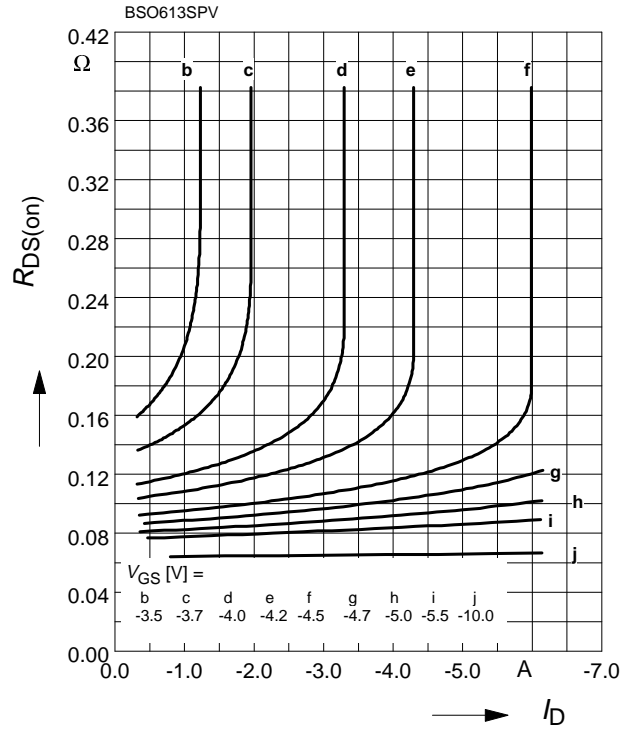

**Typ. transfer characteristics  $I_D = f(V_{GS})$**

$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$


parameter:  $t_p = 80 \mu\text{s}$

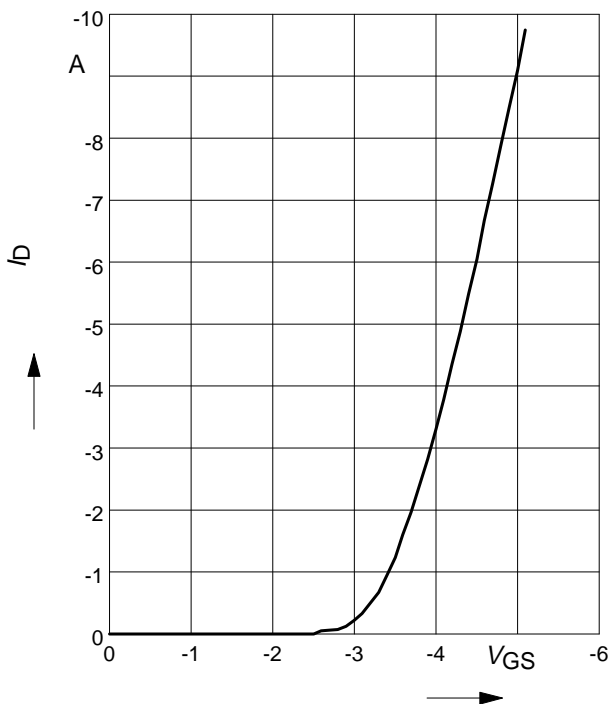

**Typ. forward transconductance**

$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$


parameter:  $g_{fs}$

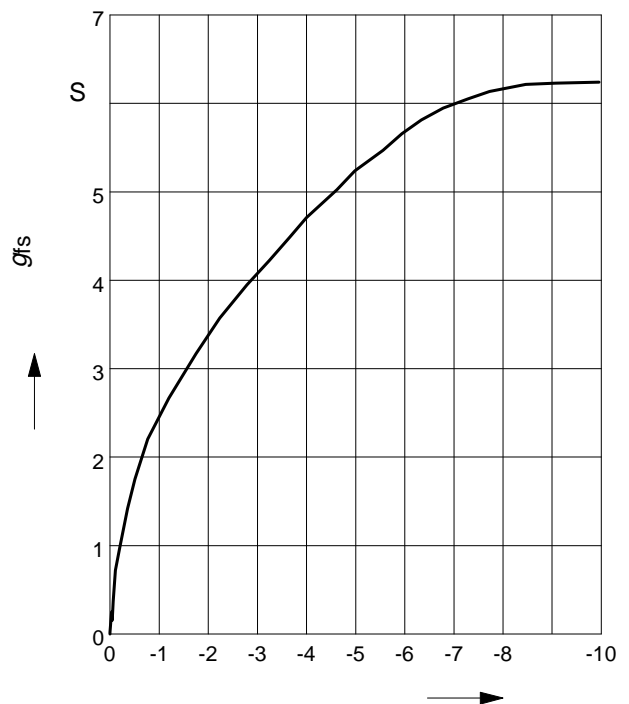

**Drain-source on-state resistance**

$$R_{DS(on)} = f(T_j)$$


parameter:  $I_D = -3.44$  A,  $V_{GS} = -10$  V

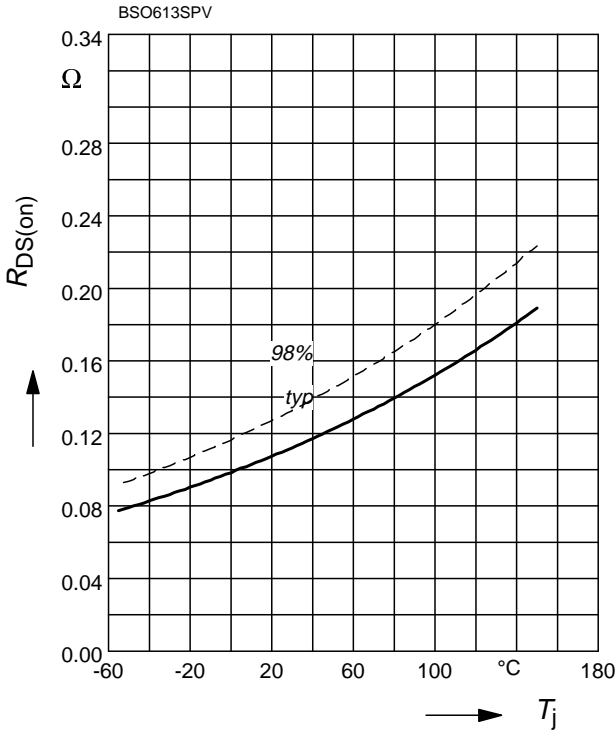

**Gate threshold voltage**

$$V_{GS(th)} = f(T_j)$$


parameter:  $V_{GS} = V_{DS}$ ,  $I_D = 1$  mA

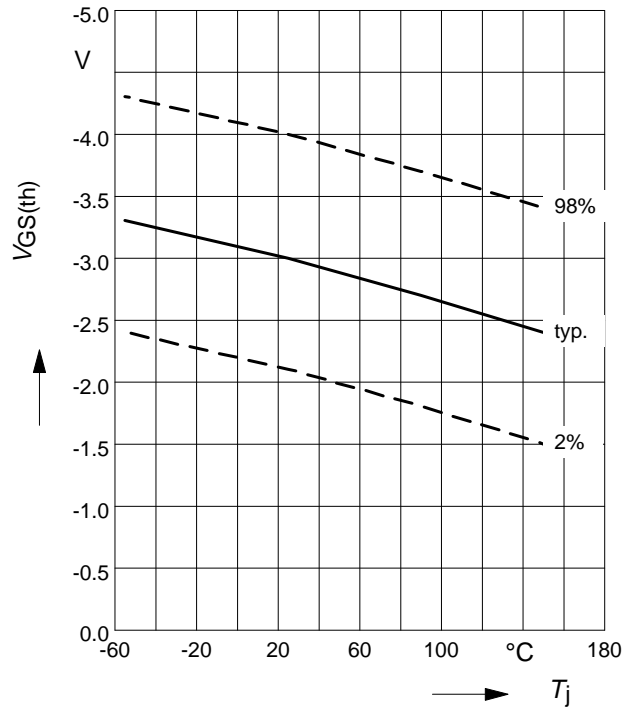

**Typ. capacitances**

$$C = f(V_{DS})$$


parameter:  $V_{GS}=0$ V,  $f=1$  MHz

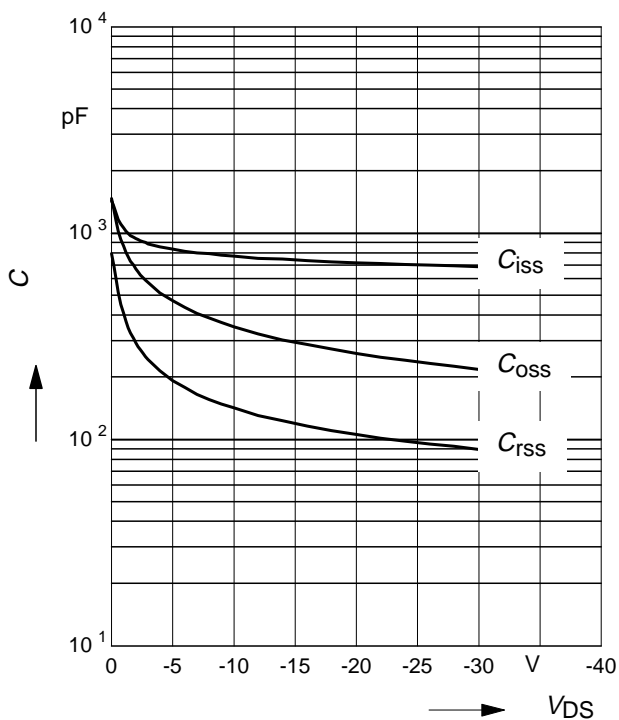

**Forward characteristics of reverse diode**

$$I_F = f(V_{SD})$$


parameter:  $T_j$ ,  $t_p = 80$   $\mu$ s

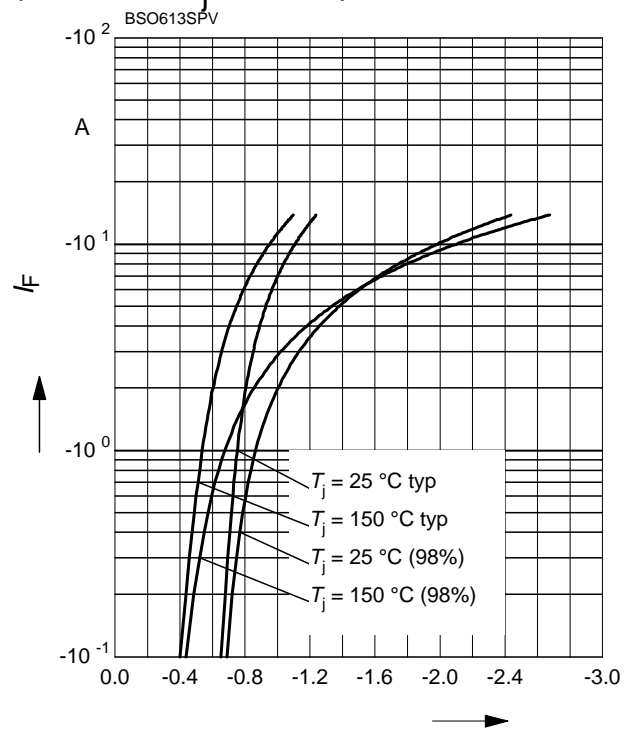

**Avalanche energy**

$$E_{AS} = f(T_j)$$


para.:  $I_D = -3.44 \text{ A}$  ,  $V_{DD} = -25 \text{ V}$  ,  $R_{GS} = 25$

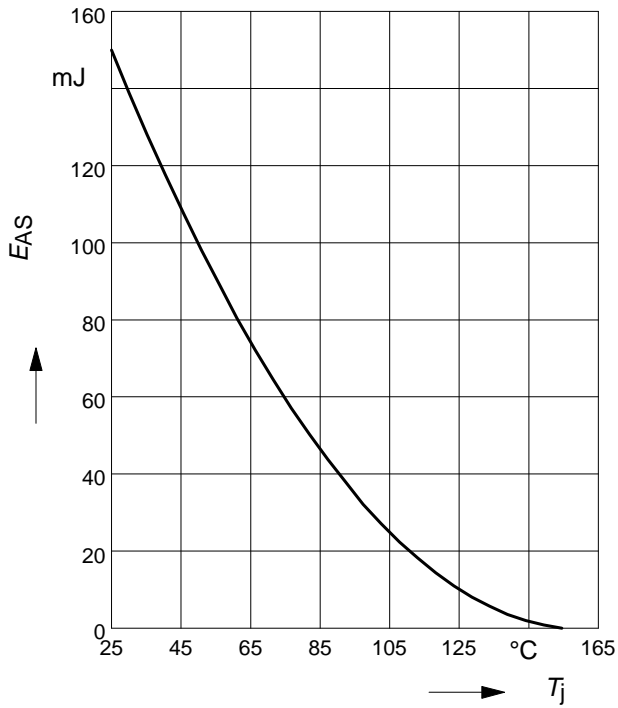

**Typ. gate charge**


$$V_{GS} = f(Q_{Gate})$$

parameter:  $I_D = -3.44 \text{ A}$  pulsed

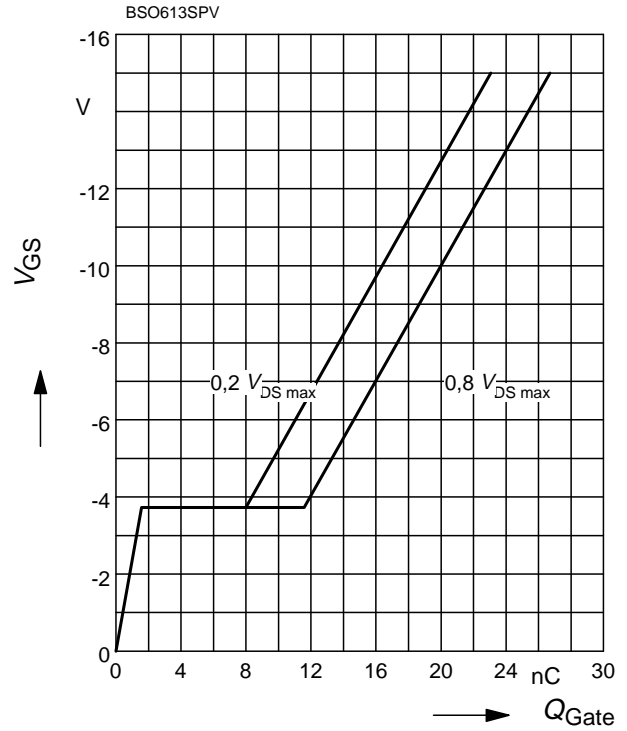

**Drain-source breakdown voltage**

$$V_{(BR)DSS} = f(T_j)$$

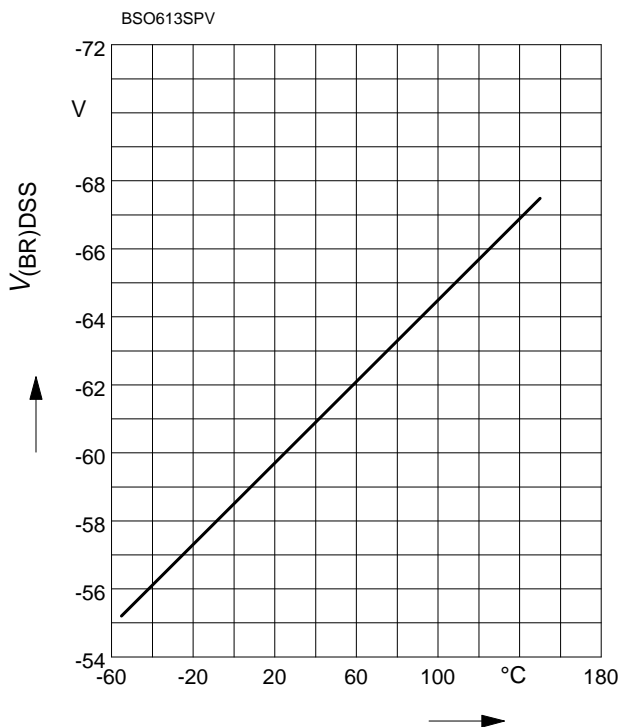



## Revision History

BSO613SPV

**Revision: 2019-07-31, Rev. 2.0**

Previous Revision

Revision	Date	Subjects (major changes since last revision)
2.0	2019-07-31	Release of final version

### Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

[erratum@infineon.com](mailto:erratum@infineon.com)

### Published by

**Infineon Technologies AG**  
**81726 München, Germany**  
**© 2019 Infineon Technologies AG**  
**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon\(英飞凌\)](#)