


1.5 AMP POSITIVE ADJUSTABLE VOLTAGE REGULATOR APPROVED TO DESC DRAWING 7703407



**Three Terminal, Precision Adjustable
 Positive Voltage Regulator In Hermetic
 Style Packages (LM117AHV)**

FEATURES

- Similar To Industry Standard LM117AHV
- Approved To DESC Standardized Military Drawing Number 7703407
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Available In Six Package Styles
- Maximum Output Voltage Tolerance Is Guaranteed to $\pm 1\%$

DESCRIPTION

These three terminal positive regulators are supplied in hermetically sealed packages. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 amps of output current. The LCC-20 device is limited to .5 amps. The unit also features output voltages that can be fixed from 1.2 volts to 57 volts using external resistors.

ABSOLUTE MAXIMUM RATINGS $T_c @ 25^\circ\text{C}$

| | |
|---|-------------------|
| Power Dissipation | |
| Case 2 | 1.1 W |
| Case-All Others | 20 W |
| Input - Output Voltage Differential | 60 V |
| Operating Junction Temperature Range | - 55°C to + 150°C |
| Storage Temperature Range | - 65°C to + 150°C |
| Lead Temperature (Soldering 10 seconds) | 300°C |
| Thermal Resistance, Junction to Case: | |
| Case 2, LCC-20 | 17°C/W |
| Case U & M, TO-257 (Isol) and SMD-3 | 4.2°C/W |
| Case T&N, TO-257 (Non-Isol) and SMD-1 | 3.5°C/W |
| Case Y, TO-3 | 3.0°C/W |
| Maximum Output Current: | |
| Case 2 | .5 A |
| Case-All Others | 1.5A |
| <u>Recommended Operating Conditions:</u> | |
| Output Voltage Range | 1.2 to 57 VDC |
| Ambient Operating Temperature Range (T_A) | - 55°C to + 125°C |
| Input Voltage Range | 4.25 to 61.25 VDC |

3.5

ELECTRICAL CHARACTERISTICS -55°C T_A 125°C, $I_L = 8\text{mA}$ (unless otherwise specified)
OM1326NTM, OM1326STM, OM1326NKM, OM1326SMM, OM1326NMM

| Parameter | Symbol | Test Conditions | Min. | Max. | Unit |
|-------------------------------|------------|---|--|----------------------------------|---------------|
| Reference Voltage | V_{REF} | $V_{DIFF} = 3.0\text{V}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$ $V_{DIFF} = 40\text{V}$ $V_{DIFF} = 60\text{V}$ | 1.238 1.225 1.225 1.225 | 1.262 1.270 1.270 1.270 | V |
| Line Regulation (Note 1) | R_{LINE} | $3.0\text{V } V_{DIFF} 40\text{V}$, $V_{out} = V_{ref}$, $T_A = 25^\circ\text{C}$ $3.3\text{V } V_{DIFF} 40\text{V}$, $V_{out} = V_{ref}$ $40\text{V } V_{DIFF} 60\text{V}$, $V_{out} = V_{ref}$, $T_A = 25^\circ\text{C}$ $40\text{V } V_{DIFF} 60\text{V}$, $V_{out} = V_{ref}$ | -4.5 -9 -5 -10 | 4.5 -9 5 10 | mV |
| Load Regulation (Note 1) | R_{LOAD} | $V_{DIFF} = 3.0\text{V}$, 10mA $I_L 1.5\text{A}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$, 10mA $I_L 1.5\text{A}$ $V_{DIFF} = 40\text{V}$, 10mA $I_L 300\text{mA}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 40\text{V}$, 10mA $I_L 195\text{mA}$ $V_{DIFF} = 60\text{V}$, 10mA $I_L 30\text{mA}$ | -15 -15 -15 -15 -15 | 15 15 15 15 15 | mV |
| Thermal Regulation | V_{RTH} | $V_{in} = 14.6\text{V}$, $I_L = 1.5\text{A}$ $P_d = 20\text{ Watts}$, $t = 20\text{ ms}$, $T_A = 25^\circ\text{C}$ | -5 | 5 | mV |
| Ripple Rejection (Note 2) | R_N | $f = 120\text{ Hz}$, $V_{out} = V_{ref}$ $C_{Adj} = 10\text{ }\mu\text{F}$, $I_{out} = 100\text{ mA}$ | 66 | | dB |
| Adjustment Pin Current | I_{Adj} | $V_{DIFF} = 3.0\text{V}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$ $V_{DIFF} = 40\text{V}$ $V_{DIFF} = 60\text{V}$ | | 100 100 100 100 | μA |
| Adjustment Pin Current Change | I_{Adj} | $V_{DIFF} = 3.0\text{V}$, 10mA $I_L 1.5\text{A}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$, 10mA $I_L 1.5\text{A}$ $V_{DIFF} = 40\text{V}$, 10mA $I_L 300\text{mA}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 40\text{V}$, 10mA $I_L 195\text{mA}$ $3.0\text{V } V_{DIFF} 40\text{V}$, $T_A = 25^\circ\text{C}$ $3.3\text{V } V_{DIFF} 40\text{V}$ $3.3\text{V } V_{DIFF} 60\text{V}$ | -5 -5 -5 -5 -5 -5 -5 | 5 5 5 5 5 5 5 | μA |
| Minimum Load Current | I_{Lmin} | $V_{DIFF} = 3.0\text{V}$, $V_{out} = 1.4\text{V}$ (forced) $V_{DIFF} = 3.3\text{V}$, $V_{out} = 1.4\text{V}$ (forced) $V_{DIFF} = 40\text{V}$, $V_{out} = 1.4\text{V}$ (forced) $V_{DIFF} = 60\text{V}$, $V_{out} = 1.4\text{V}$ (forced) | | 5.0 5.0 5.0 7.0 | mA |
| Current Limit (Note 2) | I_{CL} | $V_{DIFF} = 5\text{V}$ $V_{DIFF} = 40\text{V}$, $T_A = 25^\circ\text{C}$ $V_{DIFF} = 60\text{V}$, $T_A = 25^\circ\text{C}$ | 1.5 0.3 0.05 | 3.5 1.5 0.50 | A |

Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

3.5

| PART NUMBER DESIGNATOR | | |
|--|--|--|
| Standard Military Drawing Number | Omnirel Part Number | Omnirel Package Designation |
| 7703407M 7703407U 7703407T 7703407Y 7703407N 77034072 | OM1326SMM OM1326STM OM1326NTM OM1326NKM OM1326NMM OM1326N2M | SMD-3 TO-257 (Isolated) TO-257 (non-Isolated) TO-3 SMD-1 LCC-20 |



ELECTRICAL CHARACTERISTICS -55°C T_A 125°C, I_L = 8mA (unless otherwise specified)

OM1326N2M

| Parameter | Symbol | Test Conditions | Min. | Max. | Unit |
|----------------------------------|-------------------|--|-------|-------|------|
| Reference Voltage | V _{REF} | V _{DIFF} = 3.0V, T _A = 25°C | 1.238 | 1.262 | V |
| | | V _{DIFF} = 3.3V | 1.225 | 1.270 | |
| | | V _{DIFF} = 40V | 1.225 | 1.270 | |
| | | V _{DIFF} = 60V | 1.225 | 1.270 | |
| Line Regulation (Note 1) | R _{LINE} | 3.0V V _{DIFF} 40V, V _{out} = V _{ref} , T _A = 25°C | -4.5 | 4.5 | mV |
| | | 3.3V V _{DIFF} 40V, V _{out} = V _{ref} | -9 | -9 | |
| | | 40V V _{DIFF} 60V, V _{out} = V _{ref} , T _A = 25°C | -5 | 5 | |
| | | 40V V _{DIFF} 60V, V _{out} = V _{ref} | -10 | 10 | |
| Load Regulation (Note 1) | R _{LOAD} | V _{DIFF} = 3.0V, 10mA I _L 500 mA, T _A = 25°C | -15 | 15 | mV |
| | | V _{DIFF} = 3.3V, 10mA I _L 500 mA | -15 | 15 | |
| | | V _{DIFF} = 40V, 10mA I _L 150 mA, T _A = 25°C | -15 | 15 | |
| | | V _{DIFF} = 40V, 10mA I _L 100 mA | -15 | 15 | |
| Thermal Regulation | V _{RTH} | V _{in} = 14.6V, I _L = 300 mA | -2 | 2 | mV |
| | | P _d = 4.0 Watts, t = 20 ms, T _A = 25°C | | | |
| Ripple Rejection (Note 2) | R _N | f = 120 Hz, V _{out} = V _{ref} C _{Adj} = 10 μF, I _{out} = 100 mA | 66 | | dB |
| Adjustment Pin Current | I _{Adj} | V _{DIFF} = 3.0V, T _A = 25°C | | 100 | μA |
| | | V _{DIFF} = 3.3V | | 100 | |
| | | V _{DIFF} = 40V | | 100 | |
| | | V _{DIFF} = 60V | | 100 | |
| Adjustment Pin Current Change | I _{Adj} | V _{DIFF} = 3.0V, 10mA I _L 500 mA, T _A = 25°C | -5 | 5 | μA |
| | | V _{DIFF} = 3.3V, 10mA I _L 500 mA | -5 | 5 | |
| | | V _{DIFF} = 40V, 10mA I _L 150 mA, T _A = 25°C | -5 | 5 | |
| | | V _{DIFF} = 40V, 10mA I _L 100 mA | -5 | 5 | |
| | | 3.0V V _{DIFF} 40V, T _A = 25°C | -5 | 5 | |
| | | 3.3V V _{DIFF} 40V | -5 | 5 | |
| Minimum Load Current | I _{Lmin} | V _{DIFF} = 3.0V, V _{out} = 1.4V (forced) | | 5.0 | mA |
| | | V _{DIFF} = 3.3V, V _{out} = 1.4V (forced) | | 5.0 | |
| | | V _{DIFF} = 40V, V _{out} = 1.4V (forced) | | 5.0 | |
| | | V _{DIFF} = 60V, V _{out} = 1.4V (forced) | | 7.0 | |
| Current Limit (Note 2) | I _{CL} | V _{DIFF} = 5V | 0.5 | 1.65 | A |
| | | V _{DIFF} = 40V, T _A = 25°C | 0.15 | 0.65 | |
| | | V _{DIFF} = 60V, T _A = 25°C | 0.02 | 0.28 | |

Notes: Please see page 34.


STANDARD APPLICATION

* C_{in} is required if regulator is located an appreciable distance from power supply filter.

** C_o is not needed for stability, however it does improve transient response.

$$V_{out} = 1.25 V \left(1 + \frac{R_2}{R_1} \right) + I_{Adj} R_2$$



Since I_{Adj} is controlled to less than 100 μA, the error associated with this term is negligible in most applications.

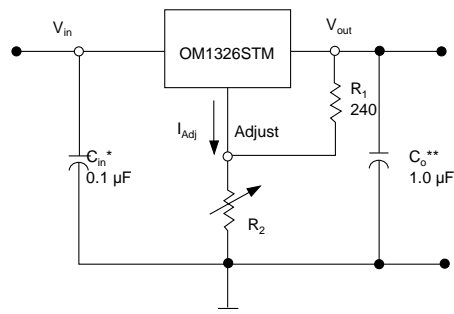

3.5




MECHANICAL OUTLINE

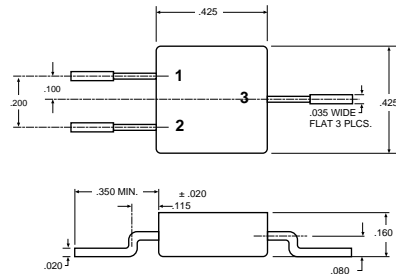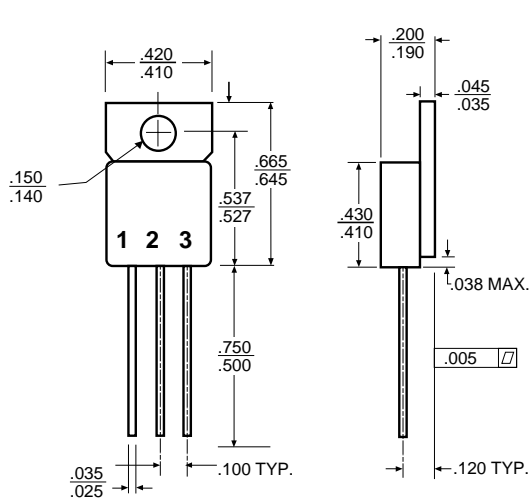


OM1326SMM
 Front View
 Pin 1 - Adjust
 Pin 2 - Input
 Pin 3 - Output
 Case - Isolated

OM1326STM
 Isolated
 Front View
 Pin 1 - Adjust
 Pin 2 - Output
 Pin 3 - Input
 Tab - Isolated


OM1326NTM
 Non-Isolated
 Front View
 Pin 1 - Adjust
 Pin 2 - Output
 Pin 3 - Input
 Tab - Output

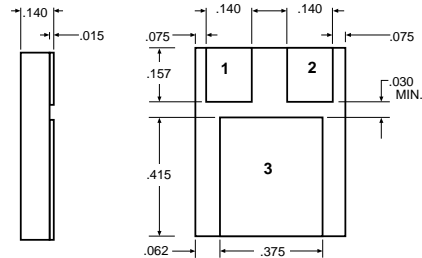

OM1326NMM
 Pin 1 - Adjust
 Pin 2 - Input
 Pin 3 - Output

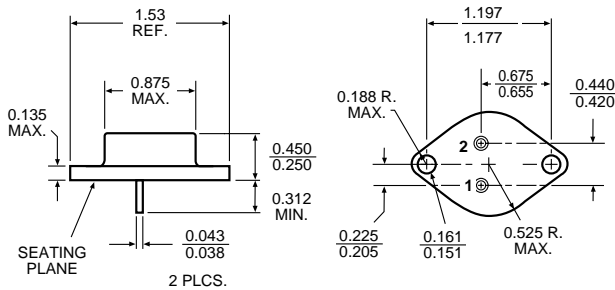

OM1326NKM
 Pin 1 - Adjust
 Pin 2 - Input
 Case - Output

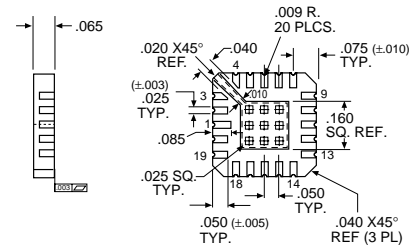

OM1326N2M

- | | |
|-----------|---------------------------------|
| Pin 1 NC | Pin 11 V _{IN} |
| Pin 2 NC | Pin 12 V _{OUT} |
| Pin 3 NC | Pin 13 V _{OUT} |
| Pin 4 NC | Pin 14 V _{OUT} (Sense) |
| Pin 5 NC | Pin 15 NC |
| Pin 6 NC | Pin 16 NC |
| Pin 7 NC | Pin 17 NC |
| Pin 8 NC | Pin 18 ADJUST |
| Pin 9 NC | Pin 19 NC |
| Pin 10 NC | Pin 20 V _{IN} |

For additional information please see the mechanical outline section.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon Technologies\(英飞凌\)](#)