


# HEXFET® Power MOSFET

## Applications


- Switch Mode Power Supply ( SMPS )
- Uninterruptable Power Supply
- High speed power switching



<b>V<sub>DSS</sub></b>	<b>500V</b>
<b>R<sub>DS(on) max</sub></b>	<b>0.23Ω</b>
<b>I<sub>D</sub> (Silicon Limited)</b>	<b>22A</b>

## Benefits

- Low Gate Charge Q<sub>g</sub> results in Simple Drive Requirement
- Improved Gate, Avalanche and dynamic dv/dt Ruggedness
- Fully Characterized Capacitance and Avalanche Voltage and Current
- Lead-Free



<b>G</b>	<b>D</b>	<b>S</b>
Gate	Drain	Source

Base part number	Package Type	Standard Pack		Orderable Part Number
		Form	Quantity	
IRFP22N50APbF	TO-247AC	Tube	25	IRFP22N50APbF

## Typical SMPS Topologies

- Full Bridge Converters
- Power Factor Correction Boost

**Table of Contents**

**Benefits .....1**

**Ordering Table .....1**

**Table of Contents .....2**

**1 Parameters .....3**

**2 Maximum ratings, Thermal, and Avalanche characteristics .....4**

**3 Electrical characteristics .....5**

**4 Electrical characteristic diagrams .....6**

**Package Information .....11**

**Qualification Information .....12**

**Revision History .....13**

# 1 Parameters

**Table1 Key performance parameters**

Parameter	Values	Units
$V_{DS}$	500	V
$R_{DS(on) max}$	0.23	$\Omega$
$I_D$	22	A

## 2 Maximum ratings and thermal characteristics

**Table 2 Maximum ratings (at  $T_J=25^\circ\text{C}$ , unless otherwise specified)**

Parameter	Symbol	Conditions	Values	Unit
Continuous Drain Current	$I_D$	$T_C = 25^\circ\text{C}$ , $V_{GS} @ 10\text{V}$	22	A
Continuous Drain Current	$I_D$	$T_C = 100^\circ\text{C}$ , $V_{GS} @ 10\text{V}$	14	
Pulsed Drain Current ①	$I_{DM}$	$T_C = 25^\circ\text{C}$	88	
Maximum Power Dissipation	$P_D$	$T_C = 25^\circ\text{C}$	277	W
Linear Derating Factor		$T_C = 25^\circ\text{C}$	2.2	W/ $^\circ\text{C}$
Gate-to-Source Voltage	$V_{GS}$	-	$\pm 30$	V
Operating Junction and Storage Temperature Range	$T_J$ $T_{STG}$	-	-55 to +150	$^\circ\text{C}$
Soldering Temperature, for 10 seconds (1.6mm from case)	-	-	300	
Mounting Torque, 6-32 or M3 Screw	-	-	10 lbf·in (1.1 N·m)	

**Table 3 Thermal characteristics**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Junction-to-Case ⑤	$R_{\theta JC}$	$T_J$ approximately $90^\circ\text{C}$	-	-	0.45	$^\circ\text{C}/\text{W}$
Case-to-Sink, Flat Greased Surface	$R_{\theta CS}$	-	-	0.24	-	
Junction-to-Ambient	$R_{\theta JA}$	-	-	-	40	

**Table 4 Avalanche characteristics**

Parameter	Symbol	Values	Unit
Single Pulse Avalanche Energy ②	$E_{AS}$ (Thermally limited)	1180	mJ
Avalanche Current ①	$I_{AR}$	22	A
Repetitive Avalanche Energy ①	$E_{AR}$	28	mJ

**Notes:**

- ① Repetitive rating; pulse width limited by max. junction temperature. (See Figure 12).
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 4.87\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 22\text{A}$ . (See Figure 10).
- ③  $I_{SD} \leq 22\text{A}$ ,  $di/dt \leq 190\text{A}/\mu\text{s}$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 150^\circ\text{C}$ .
- ④ Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ⑤  $R_\theta$  is measured at  $T_J$  approximately  $90^\circ\text{C}$ .
- ⑥  $C_{oss}$  eff. is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$

### 3 Electrical characteristics


**Table 5 Static characteristics**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	500	-	-	V
Breakdown Voltage Temp. Coefficient	$\Delta V_{(BR)DSS}/\Delta T_J$	Reference to 25°C, $I_D = 1mA$	-	0.55	-	V/°C
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 13A$	-	-	0.23	$\Omega$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	-	4.0	V
Drain-to-Source Leakage Current	$I_{DSS}$	$V_{DS} = 500V, V_{GS} = 0V$	-	-	25	$\mu A$
		$V_{DS} = 400V, V_{GS} = 0V, T_J = 125^\circ C$	-	-	250	
Gate-to-Source Forward Leakage	$I_{GSS}$	$V_{GS} = 30V$	-	-	100	nA
Gate-to-Source Reverse Leakage	$I_{GSS}$	$V_{GS} = -30V$	-	-	-100	

**Table 6 Dynamic characteristics**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Forward Trans conductance	gfs	$V_{DS} = 50V, I_D = 13A$	12	-	-	S
Total Gate Charge	$Q_g$	$I_D = 22A$ $V_{DS} = 400V$ $V_{GS} = 10V$ See Fig.6 and 13	-	-	120	nC
Gate-to-Source Charge	$Q_{gs}$		-	-	32	
Gate-to-Drain Charge	$Q_{gd}$		-	-	52	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 250V$ $I_D = 22A$ $R_G = 4.3\Omega$ $R_D = 11\Omega$ , See Fig.10	-	26	-	ns
Rise Time	$t_r$		-	94	-	
Turn-Off Delay Time	$t_{d(off)}$		-	47	-	
Fall Time	$t_f$		-	47	-	
Input Capacitance	$C_{iss}$	$V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1.0MHz$ , See Fig.5	-	3450	-	pF
Output Capacitance	$C_{oss}$		-	513	-	
Reverse Transfer Capacitance	$C_{rss}$		-	27	-	
Output Capacitance	$C_{oss}$	$V_{GS} = 0V, V_{DS} = 1V, f = 1.0MHz$	-	4935	-	
Output Capacitance	$C_{oss}$	$V_{GS} = 0V, V_{DS} = 400V, f = 1.0MHz$	-	137	-	
Effective Output Capacitance	$C_{oss\ eff.}$	$V_{GS} = 0V, V_{DS} = 0V\ to\ 400V\ \textcircled{6}$	-	264	-	

**Table 7 Reverse Diode**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Continuous Source Current (Body Diode)	$I_S$	MOSFET symbol showing the integral reverse p-n junction diode. 	-	-	22	A
Pulsed Source Current (Body Diode) ①	$I_{SM}$		-	-	88	
Diode Forward Voltage	$V_{SD}$	$T_J = 25^\circ C, I_S = 22A, V_{GS} = 0V\ \textcircled{4}$	-	-	1.5	V
Peak Diode Recovery dv/dt ③	dv/dt	$T_J = 150^\circ C, I_S = 22A, V_{DS} = 500V$	-	-	4.8	V/ns
Reverse Recovery Time	$t_{rr}$	$T_J = 25^\circ C, I_F = 22A,$ $di/dt = 100A/\mu s\ \textcircled{4}$	-	570	850	ns
Reverse Recovery Charge	$Q_{rr}$	$T_J = 25^\circ C$	-	6.1	9.2	$\mu C$
Forward Turn-On Time	$t_{on}$	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ )				

### 4 Electrical characteristic diagrams

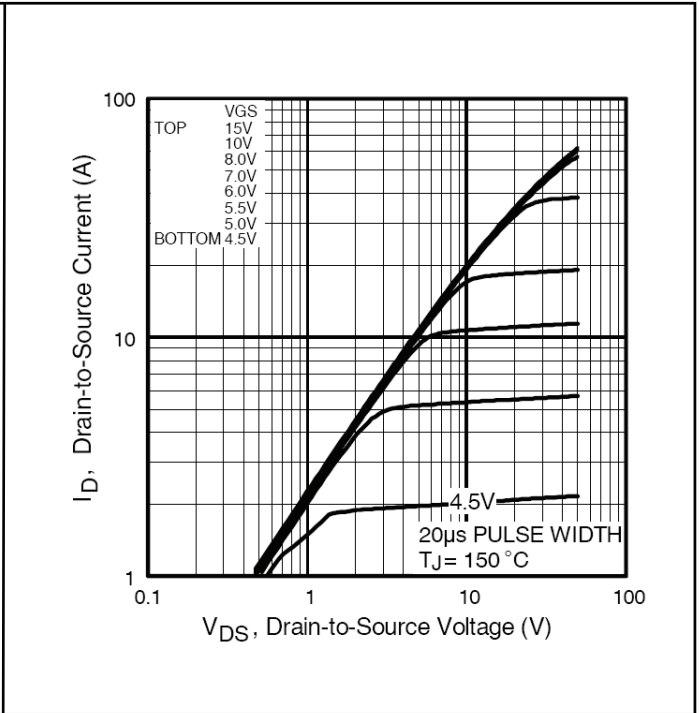
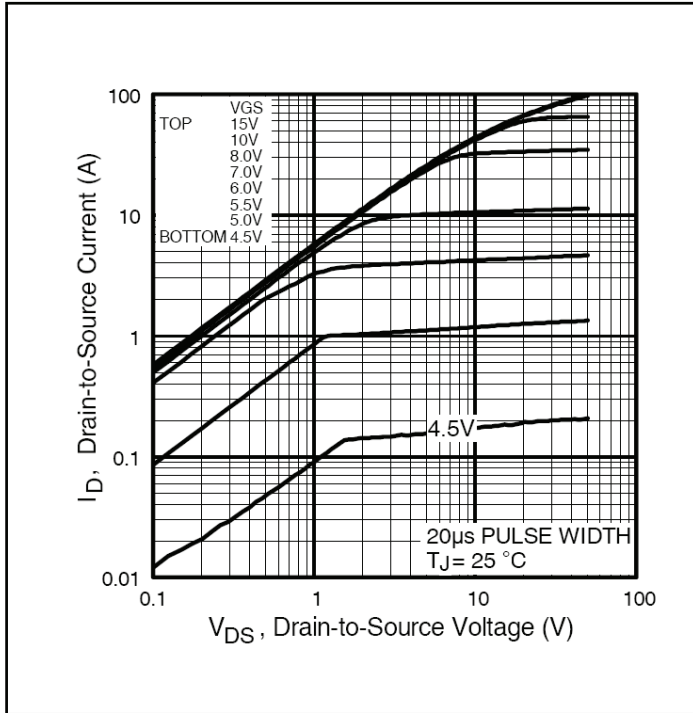


Figure 1 Typical Output Characteristics,  $T_c = 25^\circ\text{C}$

Figure 2 Typical Output Characteristics,  $T_c = 150^\circ\text{C}$

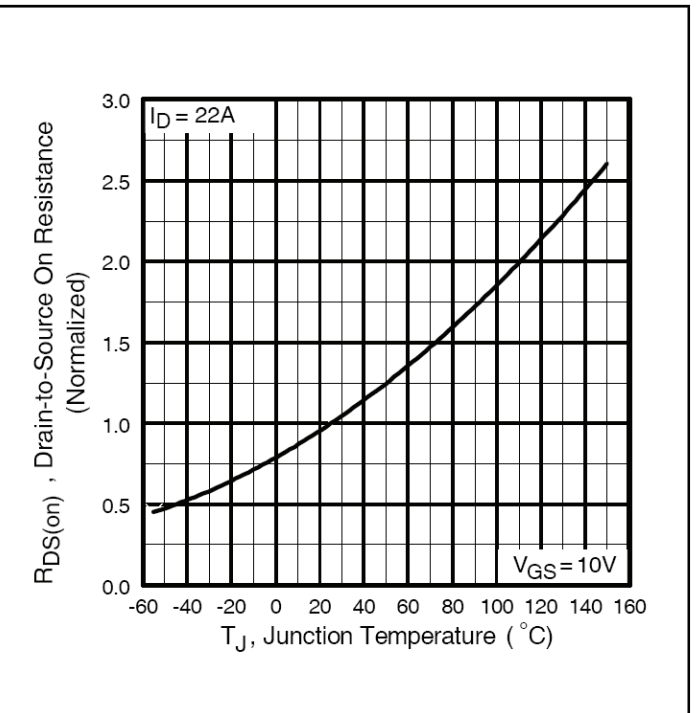
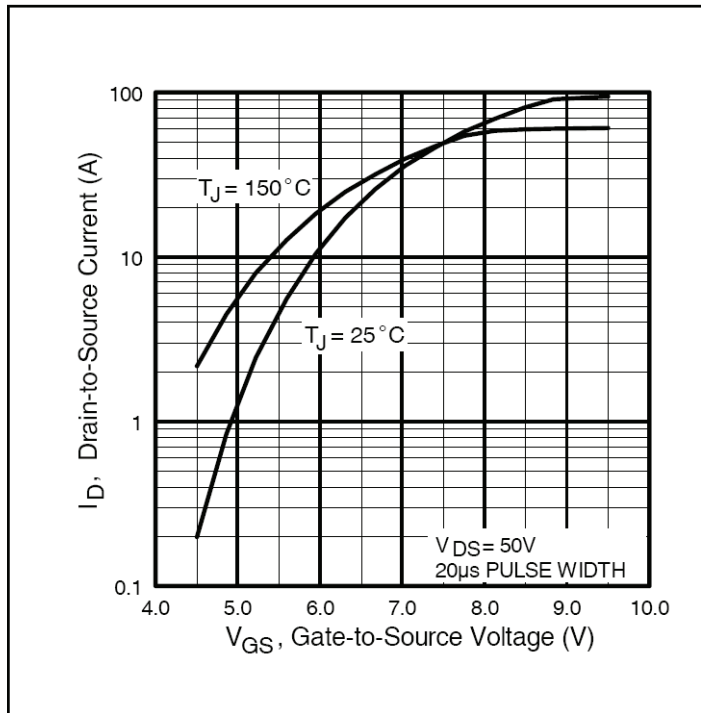


Figure 3 Typical Transfer Characteristics

Figure 4 Normalized On-Resistance vs. Temperature

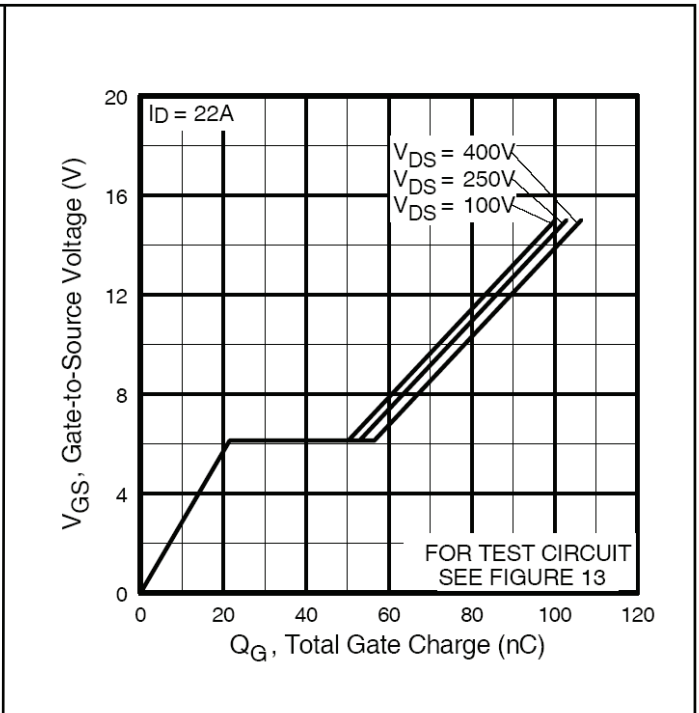
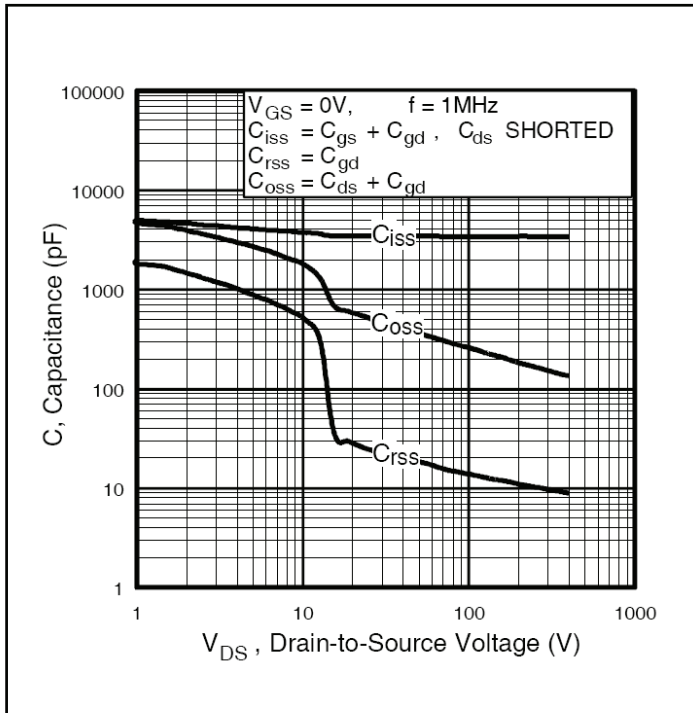


Figure 5 Typical Capacitance vs. Drain-to-Source Voltage

Figure 6 Typical Gate Charge vs. Gate-to-Source Voltage

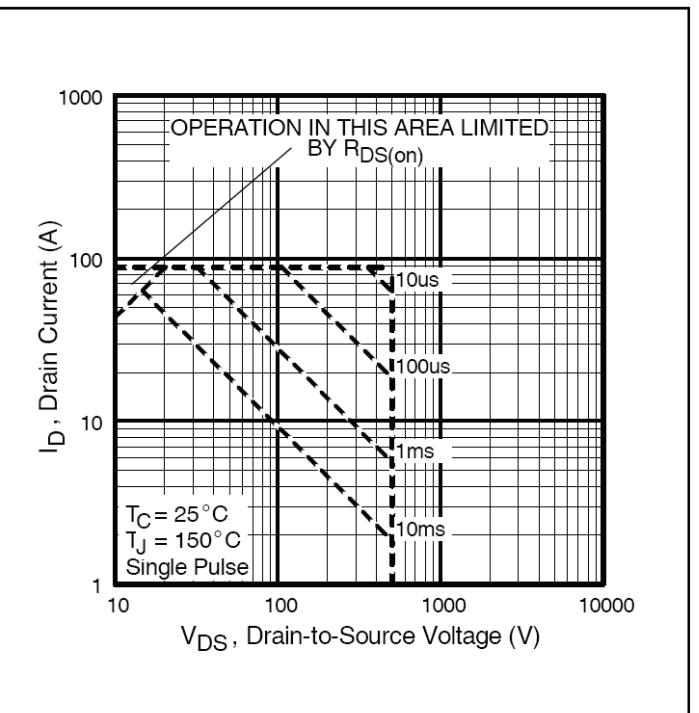
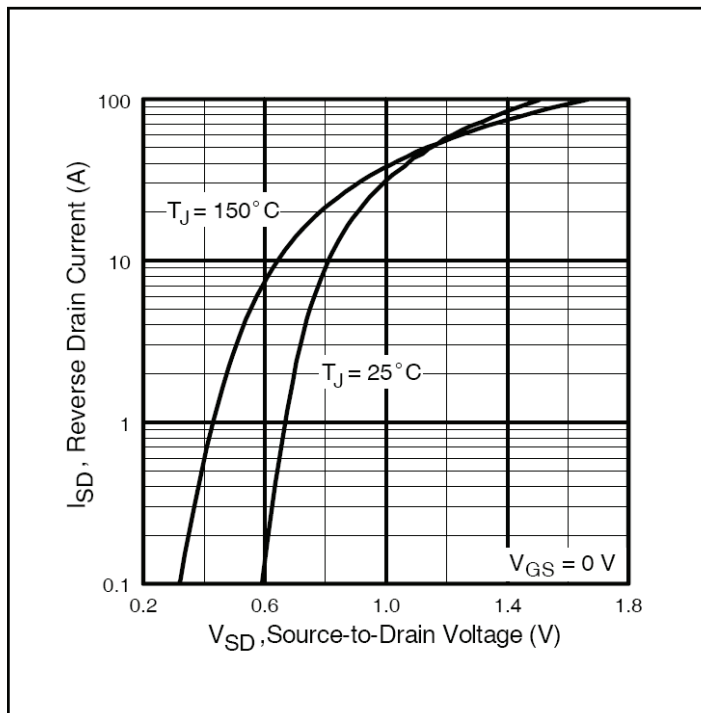


Figure 7 Typical Source-Drain Diode Forward Voltage

Figure 8 Maximum Safe Operating Area

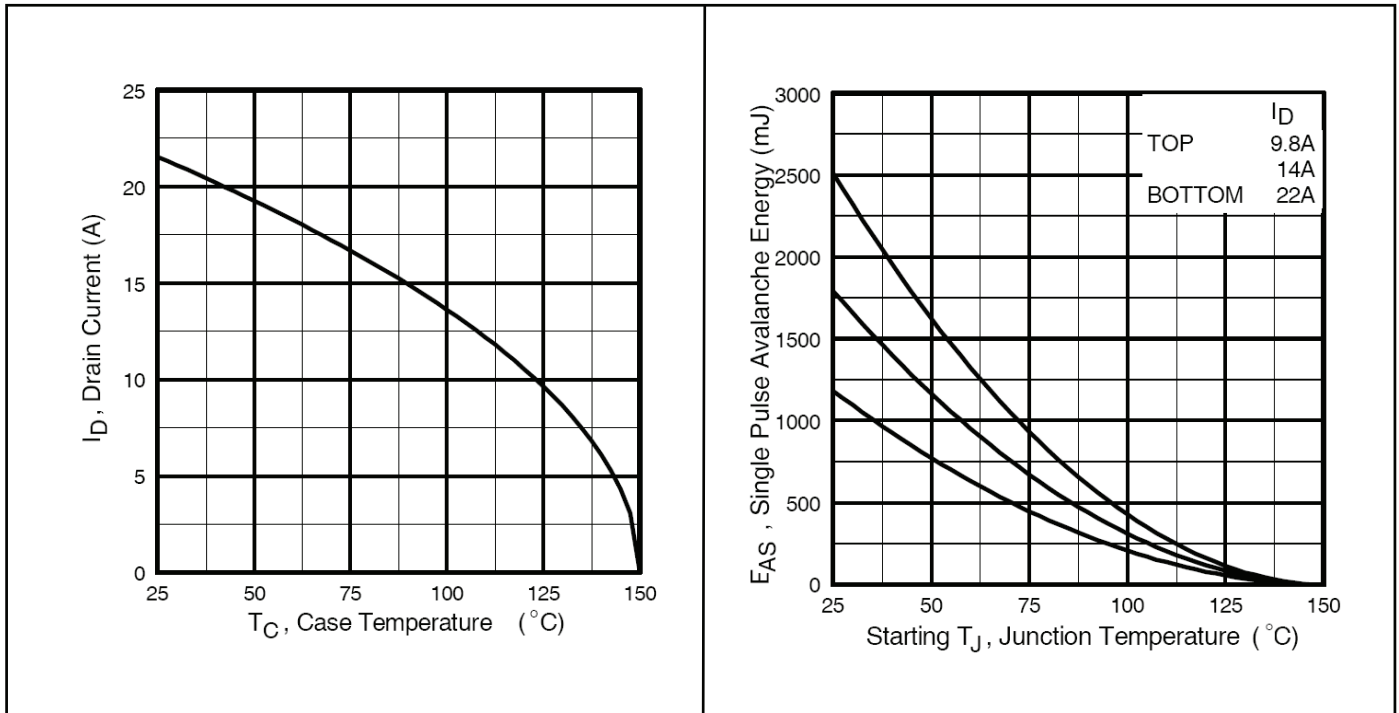


Figure 9 Maximum Drain Current vs. Case Temperature

Figure 10 Maximum Avalanche Energy vs. Temperature

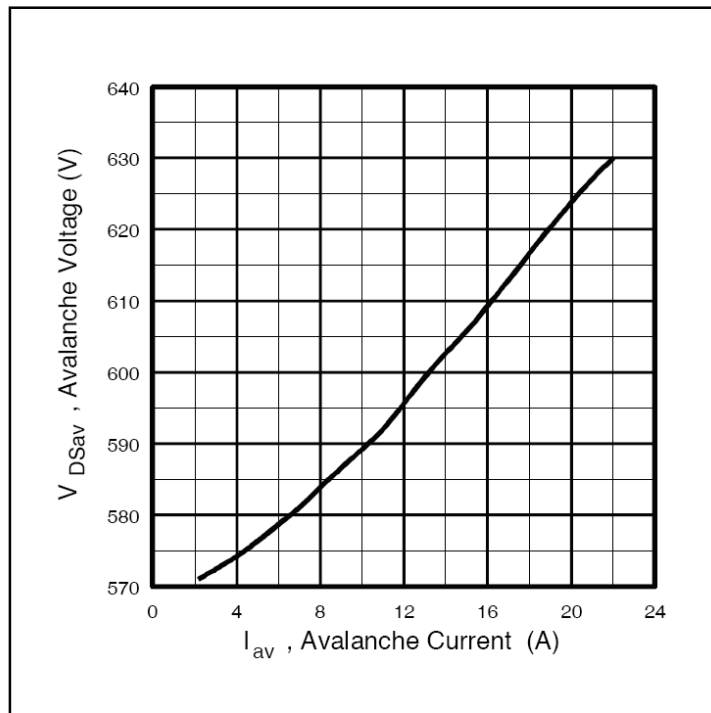


Figure 11 Typical Drain-to-Source Voltage vs. Avalanche Current



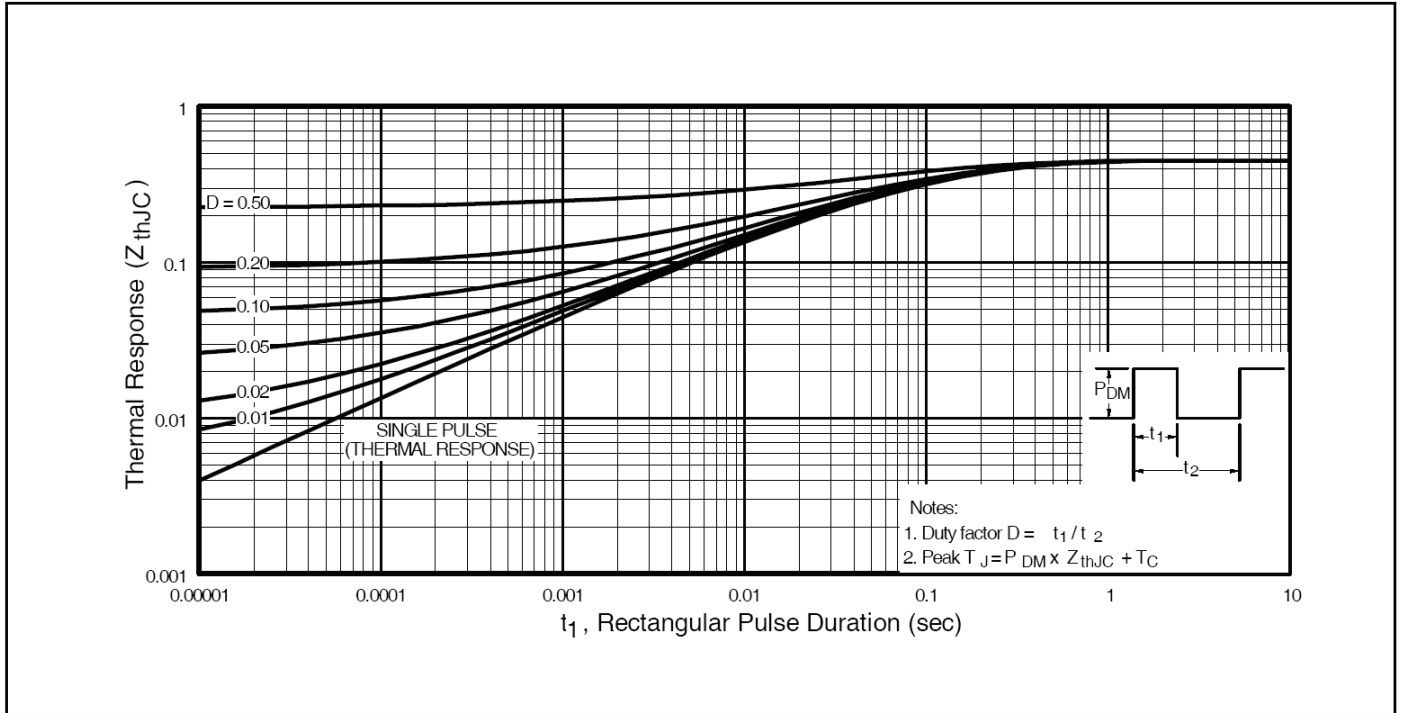


Figure 12 Maximum Effective Transient Thermal Impedance, Junction-to-Case

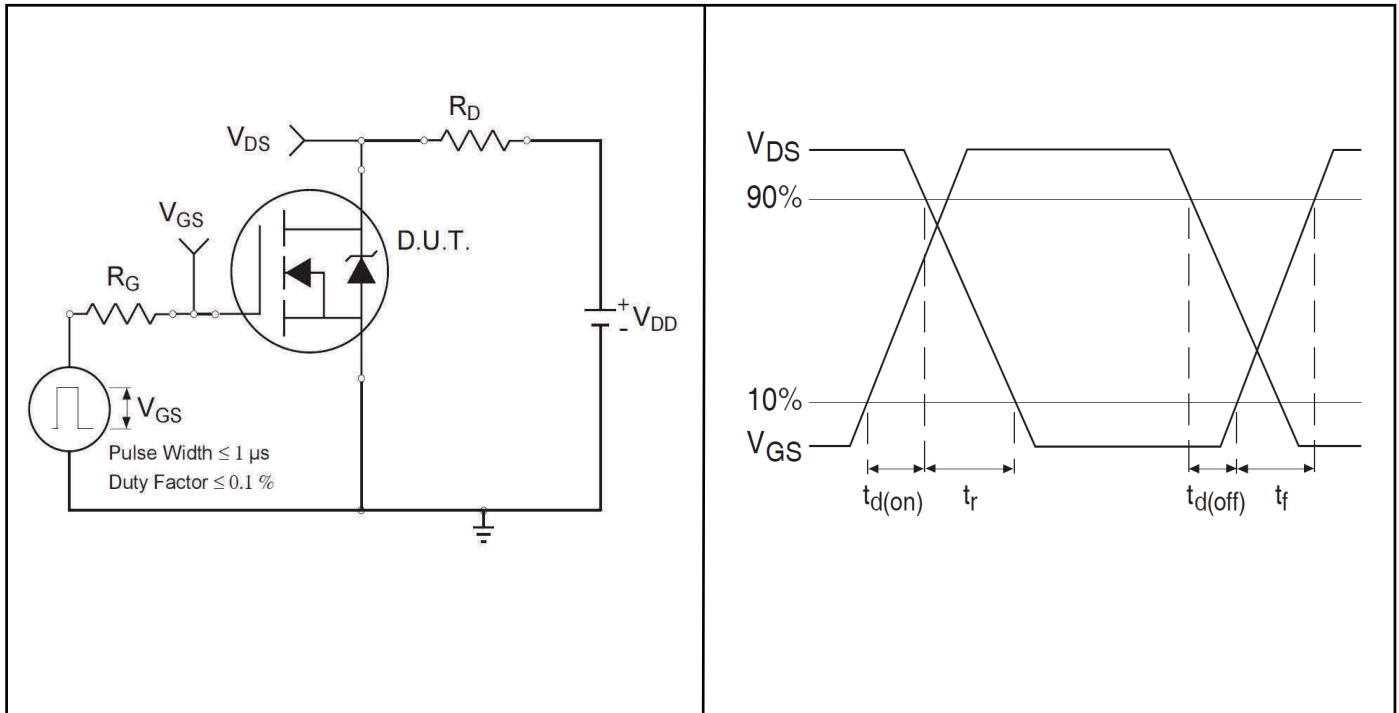


Figure 13a Switching Time Test Circuit

Figure 13b Switching Time Waveforms

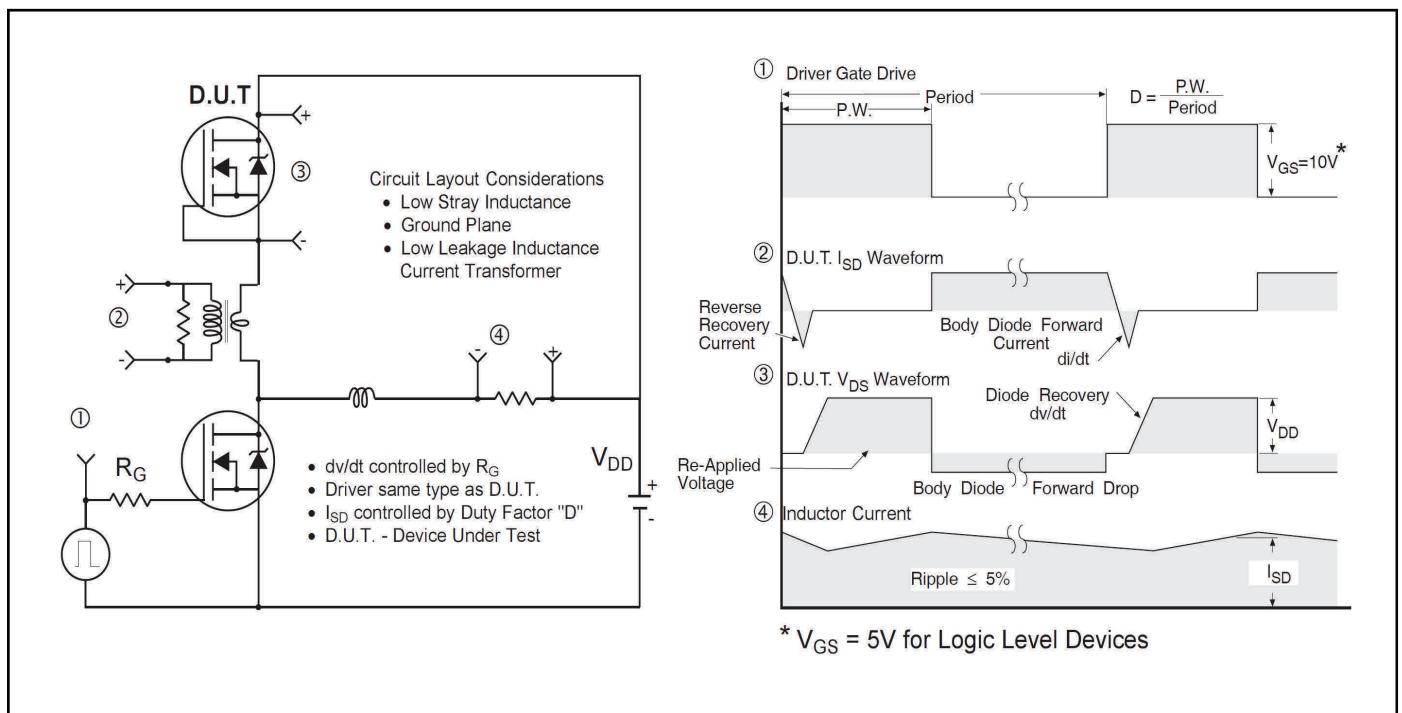


Figure 14 Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET™ Power MOSFETs

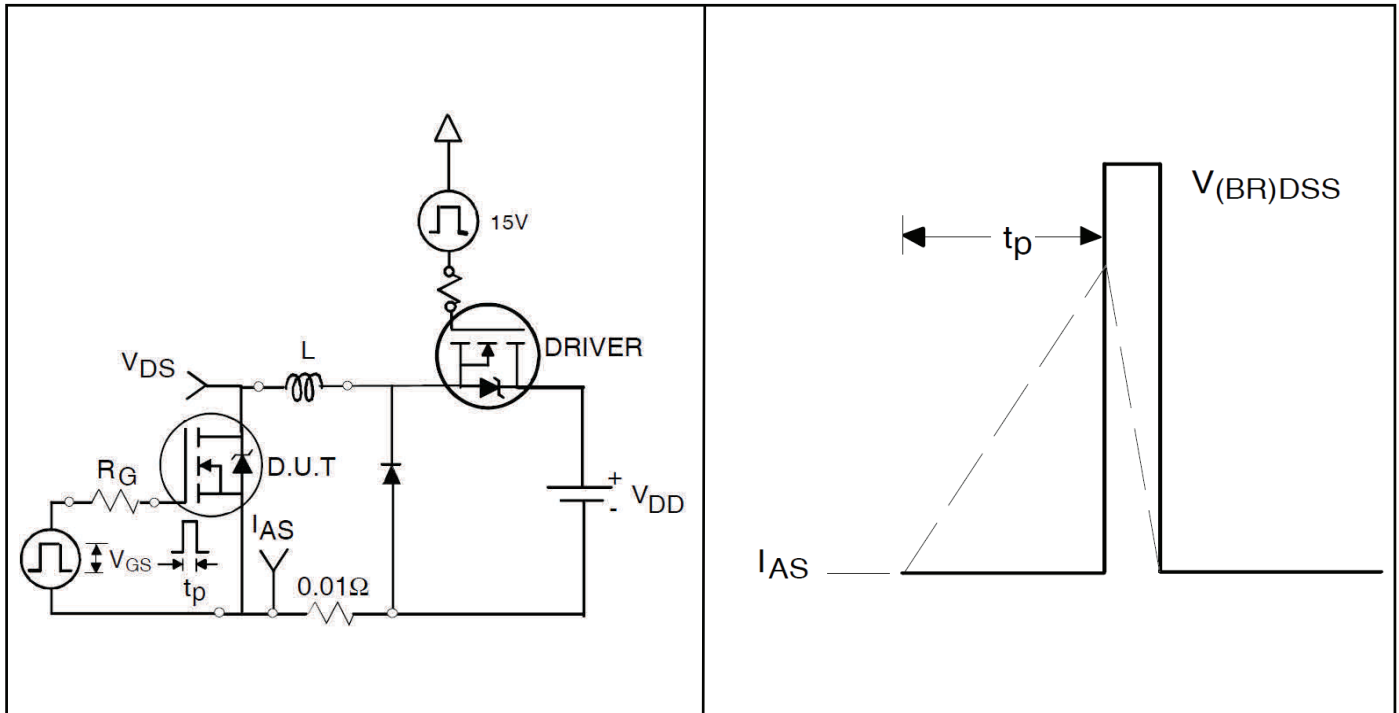


Figure 15a Unclamped Inductive Test Circuit

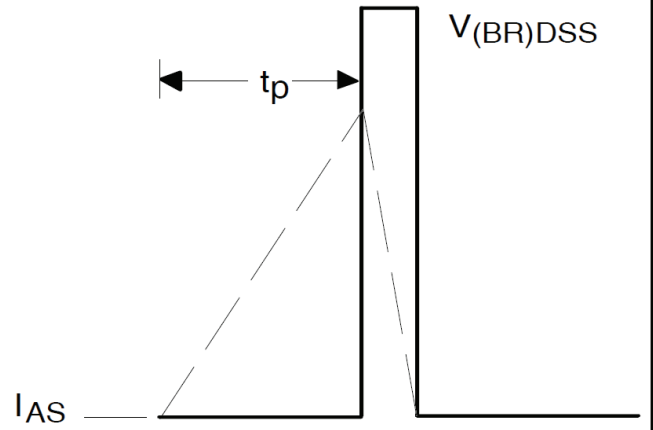


Figure 15b Unclamped Inductive Waveforms

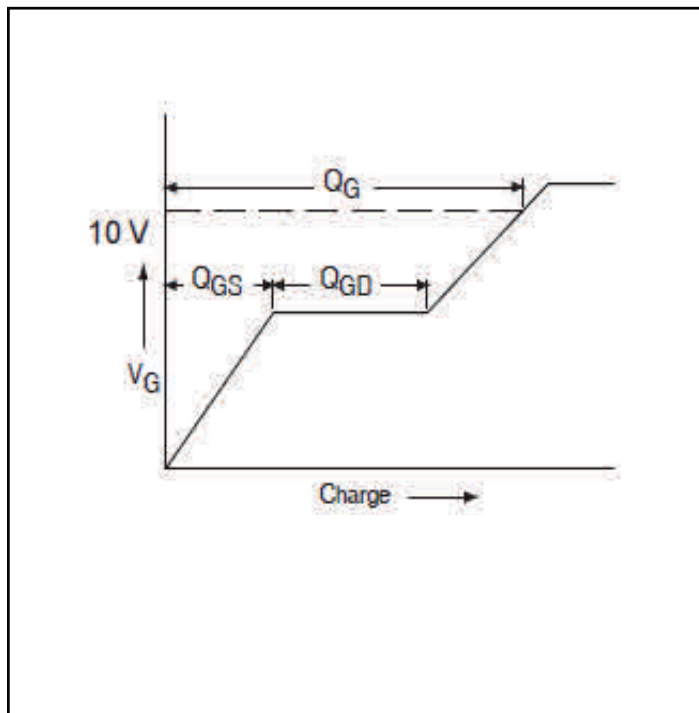


Figure 16a Gate Charge Waveform


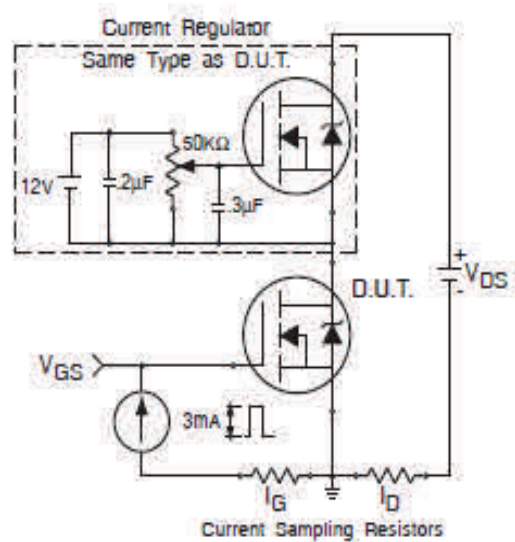


Figure 16b Gate Charge Test Circuit

**IRFP22N50APbF**  
**Package Information**

## 5 Package Information

### TO-247AC Package Outline (Dimensions are shown in millimeters (inches))

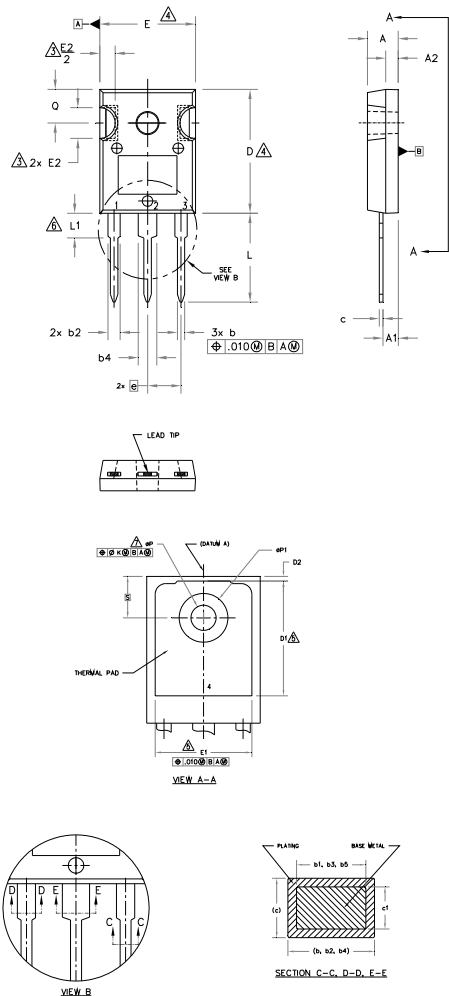

NOTES:

1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M 1994.
2. DIMENSIONS ARE SHOWN IN INCHES.
3. CONTOUR OF SLOT OPTIONAL.
4. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
5. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS D1 & E1.
6. LEAD FINISH UNCONTROLLED IN L1.
7.  $\phi P$  TO HAVE A MAXIMUM DRAFT ANGLE OF 1.5 ° TO THE TOP OF THE PART WITH A MAXIMUM HOLE DIAMETER OF .154 INCH.
8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-247AC .

SYMBOL	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN.	MAX.	MIN.	MAX.	
A	.183	.209	4.65	5.31	
A1	.087	.102	2.21	2.59	
A2	.059	.098	1.50	2.49	
b	.039	.055	0.99	1.40	
b1	.039	.053	0.99	1.35	
b2	.065	.094	1.65	2.39	
b3	.065	.092	1.65	2.34	
b4	.102	.135	2.59	3.43	
b5	.102	.133	2.59	3.38	
c	.015	.035	0.38	0.89	
c1	.015	.033	0.38	0.84	
D	.776	.815	19.71	20.70	4
D1	.515	-	13.08	-	5
D2	.020	.053	0.51	1.35	
E	.602	.625	15.29	15.87	4
E1	.530	-	13.46	-	
E2	.178	.216	4.52	5.49	
e	.215 BSC		5.46 BSC		
$\phi k$	.010		0.25		
L	.559	.634	14.20	16.10	
L1	.146	.169	3.71	4.29	
$\phi P$	.140	.144	3.56	3.66	
$\phi P1$	-	.291	-	7.39	
Q	.209	.224	5.31	5.69	
S	.217 BSC		5.51 BSC		

LEAD ASSIGNMENTS

HEXFET

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN


IGBTs, CoPACK

- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER
- 4.- COLLECTOR

DIODES

- 1.- ANODE/OPEN
- 2.- CATHODE
- 3.- ANODE

### TO-247AC Part Marking Information

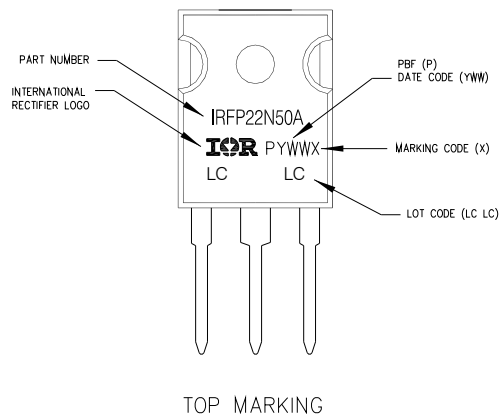

TO-247AC package is not recommended for Surface Mount Application.

## 6 Qualification Information

### Qualification Information

<b>Qualification Level</b>	Industrial (per JEDEC JESD47F) †	
<b>Moisture Sensitivity Level</b>	TO-247AC	N/A
<b>RoHS Compliant</b>	Yes	

† Applicable version of JEDEC standard at the time of product release.

## Revision History

### Major changes since the last revision

Page or Reference	Revision	Date	Description of changes
All pages	2.0	2018-07-10	• First release data sheet.

## Trademarks of Infineon Technologies AG

$\mu$ HVIC™,  $\mu$ IPM™,  $\mu$ PFC™, AU-ConvertIR™, AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolDP™, CoolGaN™, COOLiR™, CoolMOS™, CoolSET™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GaNpowIR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDrivrIR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowIRaudio™, PowIRstage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™

Trademarks updated November 2015

## Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2015-05-06**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2016 Infineon Technologies AG.  
All Rights Reserved.**

**Do you have a question about this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon Technologies\(英飞凌\)](#)