

**RADIATION HARDENED  
POWER MOSFET  
THRU-HOLE (TO-254AA)**
**200V, N-CHANNEL  
REF: MIL-PRF-19500/663  
RAD-Hard HEXFET TECHNOLOGY**
**Product Summary**

Part Number	Radiation Level	RDS(on)	I <sub>D</sub>	QPL Part Number
IRHM7260	100 kRads(Si)	0.070Ω	35A*	JANSR2N7433
IRHM3260	300 kRads(Si)	0.070Ω	35A*	JANSF2N7433
IRHM5260	500 kRads(Si)	0.070Ω	35A*	JANSG2N7433
IRHM8260	1000 kRads(Si)	0.070Ω	35A*	JANSH2N7433


**Description**

IRHM7260 is part of the International Rectifier HiRel family of products. The IR HiRel RAD-Hard HEXFET technology provides high performance power MOSFETs for space applications. This technology has over a decade of proven performance and reliability in satellite applications. These devices have been characterized for both Total Dose and Single Event Effects (SEE). The combination of low Rdson and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

**Features**

- Single Event Effect (SEE) Hardened
- Low RDS(on)
- Low Total Gate Charge
- Simple Drive Requirements
- Hermetically Sealed
- Electrically Isolated
- Ceramic Eyelets
- Light Weight
- ESD Rating: Class 3B per MIL-STD-750, Method 1020

**Absolute Maximum Ratings**

Pre-Irradiation			
Symbol	Parameter	Value	Units
I <sub>D</sub> @ V <sub>GS</sub> = 12V, T <sub>C</sub> = 25°C	Continuous Drain Current	35*	A
I <sub>D</sub> @ V <sub>GS</sub> = 12V, T <sub>C</sub> = 100°C	Continuous Drain Current	25	
I <sub>DM</sub>	Pulsed Drain Current ①	140	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Maximum Power Dissipation	250	W
	Linear Derating Factor	2.0	W/°C
V <sub>GS</sub>	Gate-to-Source Voltage	± 20	V
E <sub>AS</sub>	Single Pulse Avalanche Energy ②	500	mJ
I <sub>AR</sub>	Avalanche Current ①	35	A
E <sub>AR</sub>	Repetitive Avalanche Energy ①	25	mJ
dv/dt	Peak Diode Recovery dv/dt ③	5.7	V/ns
T <sub>J</sub> T <sub>STG</sub>	Operating Junction and Storage Temperature Range	-55 to + 150	°C
	Lead Temperature	300 (0.063 in. /1.6 mm from case for 10s)	
	Weight	9.3 (Typical)	g

\* Current is limited by package

For Footnotes, refer to the page 2.

## Pre-Irradiation

 Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (Unless Otherwise Specified)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	200	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}$ , $I_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.26	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $I_D = 1.0\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	0.070	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}$ , $I_D = 25\text{A}$ ④
		—	—	0.077		$\text{V}_{\text{GS}} = 12\text{V}$ , $I_D = 35\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	—	4.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}$ , $I_D = 1.0\text{mA}$
$G_{\text{fs}}$	Forward Transconductance	9.0	—	—	S	$\text{V}_{\text{DS}} = 15\text{V}$ , $I_D = 25\text{A}$ ④
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	—	—	25	$\mu\text{A}$	$\text{V}_{\text{DS}} = 160\text{V}$ , $\text{V}_{\text{GS}} = 0\text{V}$
		—	—	250		$\text{V}_{\text{DS}} = 160\text{V}$ , $\text{V}_{\text{GS}} = 0\text{V}$ , $T_J = 125^\circ\text{C}$
$I_{\text{GSS}}$	Gate-to-Source Leakage Forward	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
	Gate-to-Source Leakage Reverse	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$Q_G$	Total Gate Charge	—	—	290	nC	$I_D = 35\text{A}$
$Q_{\text{GS}}$	Gate-to-Source Charge	—	—	42		$\text{V}_{\text{DS}} = 100\text{V}$
$Q_{\text{GD}}$	Gate-to-Drain ('Miller') Charge	—	—	120		$\text{V}_{\text{GS}} = 12\text{V}$
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	50	ns	$\text{V}_{\text{DD}} = 100\text{V}$
$t_{\text{r}}$	Rise Time	—	—	200		$I_D = 35\text{A}$
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	200		$R_G = 2.35\Omega$
$t_f$	Fall Time	—	—	130		$\text{V}_{\text{GS}} = 12\text{V}$
$L_s + L_D$	Total Inductance	—	6.8	—	nH	Measured from Drain lead (6mm /0.25in from package) to Source lead (6mm/0.25in from package) with Source wire internally bonded from Source pin to Drain pad
$C_{\text{iss}}$	Input Capacitance	—	5300	—	pF	$\text{V}_{\text{GS}} = 0\text{V}$
$C_{\text{oss}}$	Output Capacitance	—	1200	—		$\text{V}_{\text{DS}} = 25\text{V}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	360	—		$f = 1.0\text{MHz}$

## Source-Drain Diode Ratings and Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	35*	A	
$I_{\text{SM}}$	Pulsed Source Current (Body Diode) ①	—	—	140		
$V_{\text{SD}}$	Diode Forward Voltage	—	—	1.8	V	$T_J = 25^\circ\text{C}$ , $I_S = 35\text{A}$ , $\text{V}_{\text{GS}} = 0\text{V}$ ④
$t_{\text{rr}}$	Reverse Recovery Time	—	—	820	ns	$T_J = 25^\circ\text{C}$ , $I_F = 35\text{A}$ , $\text{V}_{\text{DD}} \leq 50\text{V}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	—	8.5		$dI/dt = 100\text{A}/\mu\text{s}$ ④
$t_{\text{on}}$	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by $L_s+L_D$ )				

## Thermal Resistance

Symbol	Parameter	Min.	Typ.	Max.	Units
$R_{\theta\text{JC}}$	Junction-to-Case	—	—	0.50	°C/W
$R_{\theta\text{CS}}$	Case -to-Sink	—	0.21	—	
$R_{\theta\text{JA}}$	Junction-to-Ambient (Typical socket mount)	—	—	48	

## Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ②  $\text{V}_{\text{DD}} = 50\text{V}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.82\text{mH}$ , Peak  $I_L = 35\text{A}$ ,  $\text{V}_{\text{GS}} = 12\text{V}$
- ③  $I_{\text{SD}} \leq 35\text{A}$ ,  $dI/dt \leq 410\text{A}/\mu\text{s}$ ,  $\text{V}_{\text{DD}} \leq 200\text{V}$ ,  $T_J \leq 150^\circ\text{C}$
- ④ Pulse width  $\leq 300\ \mu\text{s}$ ; Duty Cycle  $\leq 2\%$
- ⑤ Total Dose Irradiation with  $\text{V}_{\text{GS}}$  Bias. 12 volt  $\text{V}_{\text{GS}}$  applied and  $\text{V}_{\text{DS}} = 0$  during irradiation per MIL-STD-750, Method 1019, condition A.
- ⑥ Total Dose Irradiation with  $\text{V}_{\text{DS}}$  Bias. 160 volt  $\text{V}_{\text{DS}}$  applied and  $\text{V}_{\text{GS}} = 0$  during irradiation per MIL-STD-750, Method 1019, condition A.

## Radiation Characteristics

IR HiRel radiation hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at IR HiRel is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

**Table 1. Electrical Characteristics @  $T_j = 25^\circ\text{C}$ , Post Total Dose Irradiation ⑤⑥**

Symbol	Parameter	100 kRads (Si) <sup>1</sup>		300k - 1000 kRads (Si) <sup>2</sup>		Units	Test Conditions
		Min.	Max.	Min.	Max.		
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	200	—	200	—	V	$\text{V}_{\text{GS}} = 0\text{V}$ , $\text{I}_D = 1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	4.0	1.25	4.5	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}$ , $\text{I}_D = 1.0\text{mA}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Forward	—	100	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Reverse	—	-100	—	-100	nA	$\text{V}_{\text{GS}} = -20\text{V}$
$\text{I}_{\text{DSS}}$	Zero Gate Voltage Drain Current	—	25	—	50	$\mu\text{A}$	$\text{V}_{\text{DS}} = 160\text{V}$ , $\text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ④ On-State Resistance (TO-3)	—	0.070	—	0.11	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}$ , $\text{I}_D = 25\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ④ On-State Resistance (TO-254AA)	—	0.070	—	0.070	$\Omega$	$\text{V}_{\text{GS}} = 12\text{V}$ , $\text{I}_D = 25\text{A}$
$\text{V}_{\text{SD}}$	Diode Forward Voltage ④	—	1.8	—	1.8	V	$\text{V}_{\text{GS}} = 0\text{V}$ , $\text{I}_D = 35\text{A}$


1. Part number IRHM7260 (JANSR2N7433)

2. Part numbers IRHM3260 (JANSF2N7433), IRHM5260 (JANSG2N7433) and IRHM8260 (JANSH2N7433)

IR HiRel radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

**Table 2. Typical Single Event Effect Safe Operating Area**


Ion	LET (MeV/(mg/cm <sup>2</sup> ))	Energy (MeV)	Range ( $\mu\text{m}$ )	V <sub>DS</sub> (V)				
				@V <sub>GS</sub> =0V	@V <sub>GS</sub> =-5V	@V <sub>GS</sub> =-10V	@V <sub>GS</sub> =-15V	@V <sub>GS</sub> =-20V
Cu	28	285	43	190	180	170	125	—
Br	36.8	305	39	100	100	100	50	—

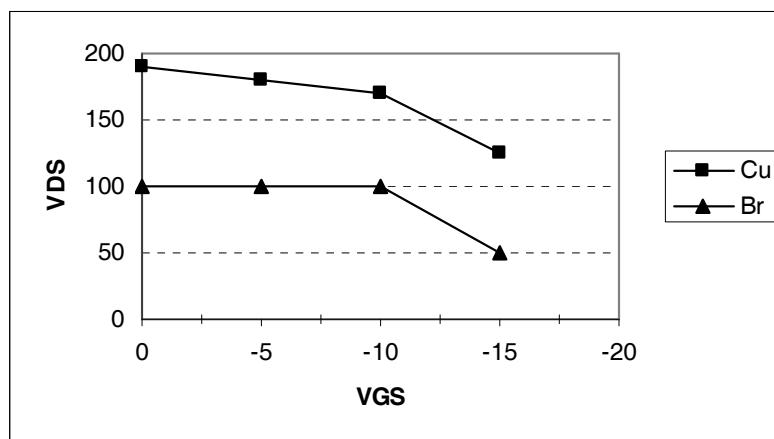


**Fig a.** Typical Single Event Effect, Safe Operating Area

For Footnotes, refer to the page 2.


### Pre-Irradiation

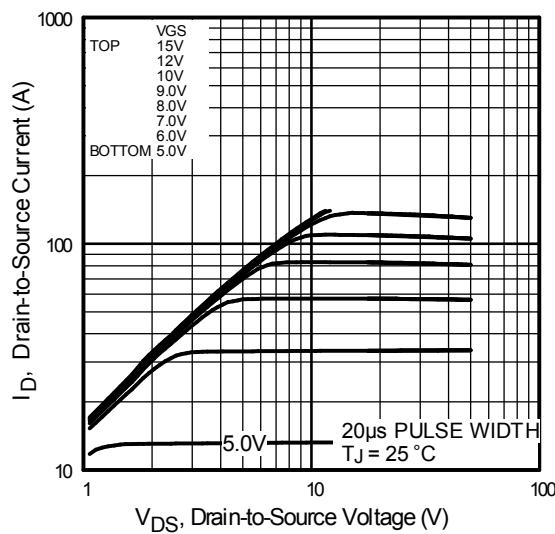


**Fig 1.** Typical Output Characteristics

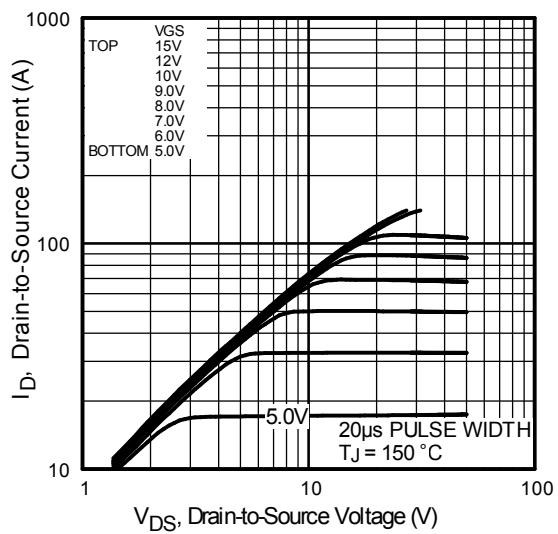


**Fig 2.** Typical Output Characteristics

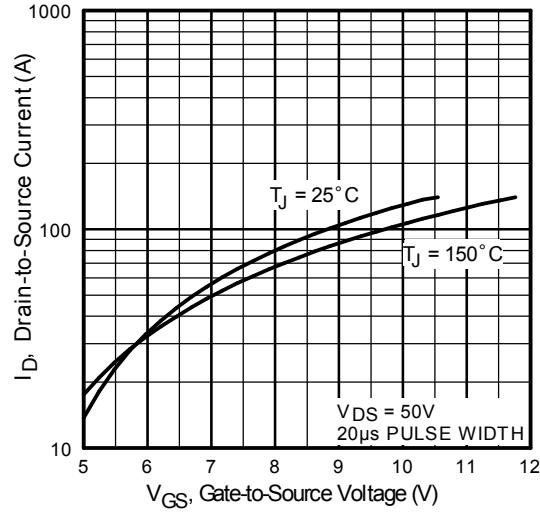


**Fig 3.** Typical Transfer Characteristics

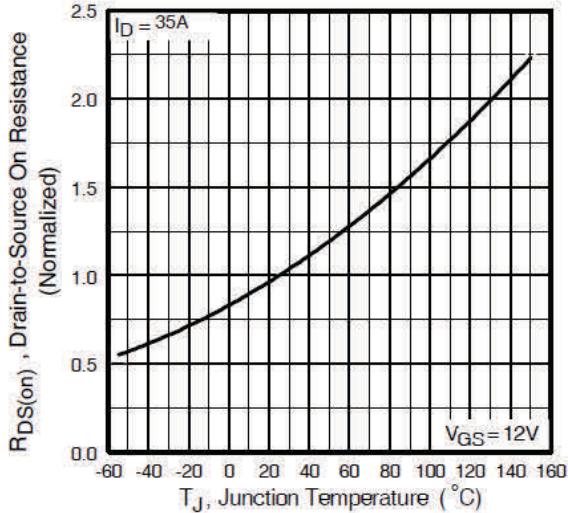

**Fig 4.** Normalized On-Resistance Vs. Temperature

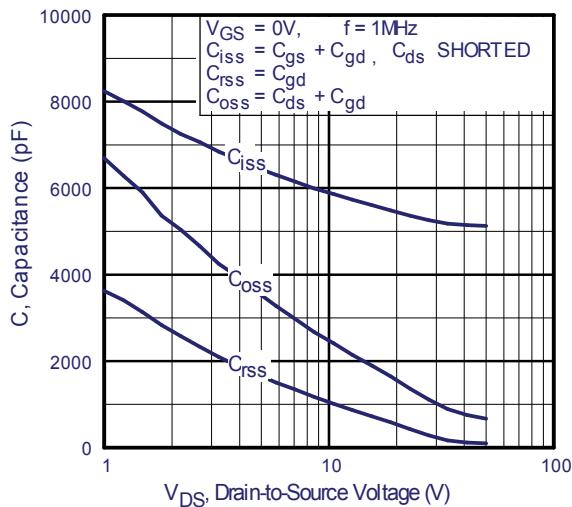


**Fig 5.** Typical Capacitance Vs.  
Drain-to-Source Voltage

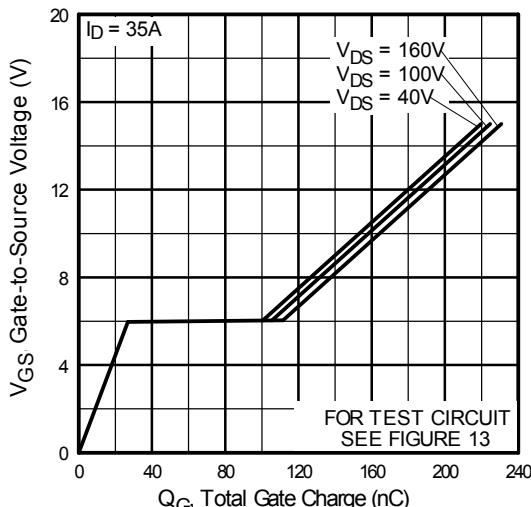


**Fig 6.** Typical Gate Charge Vs.  
Gate-to-Source Voltage


### Pre-Irradiation

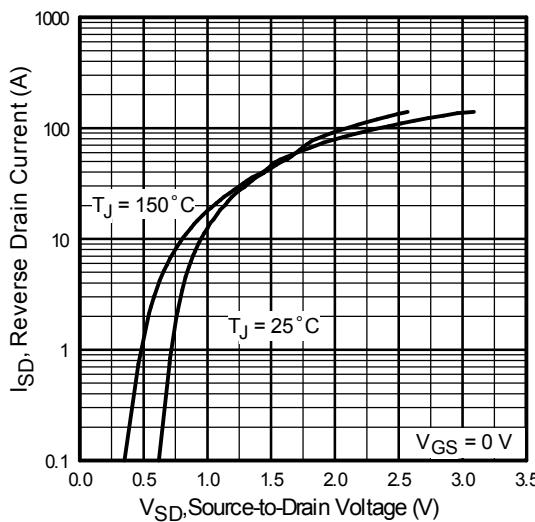


**Fig 7.** Typical Source-Drain Diode Forward Voltage

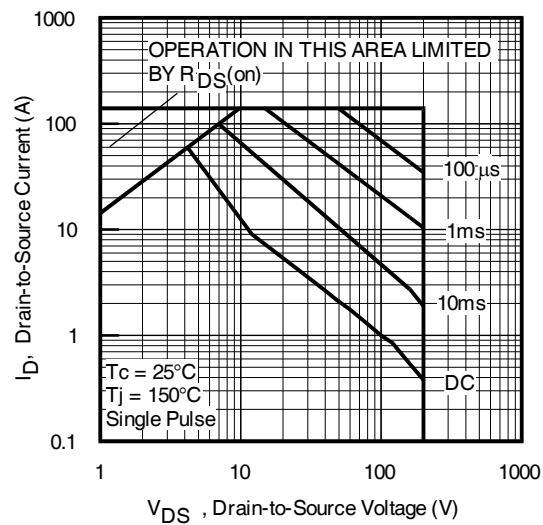


**Fig 8.** Maximum Safe Operating Area

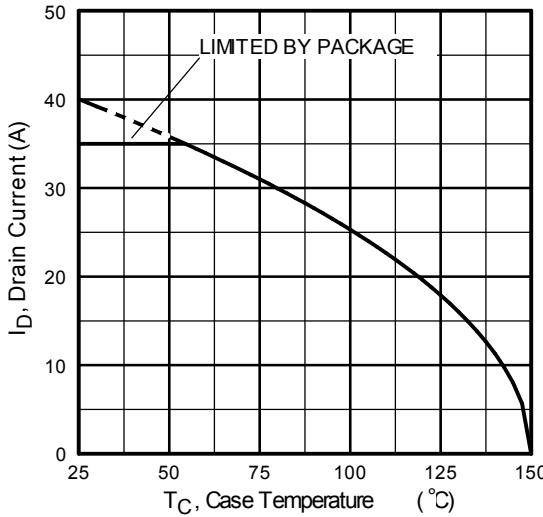

**Fig 9.** Maximum Drain Current Vs. Case Temperature

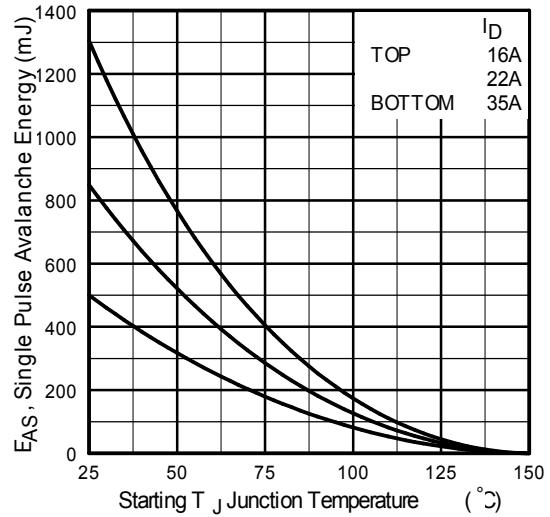


**Fig 10.** Maximum Avalanche Energy Vs. Drain Current

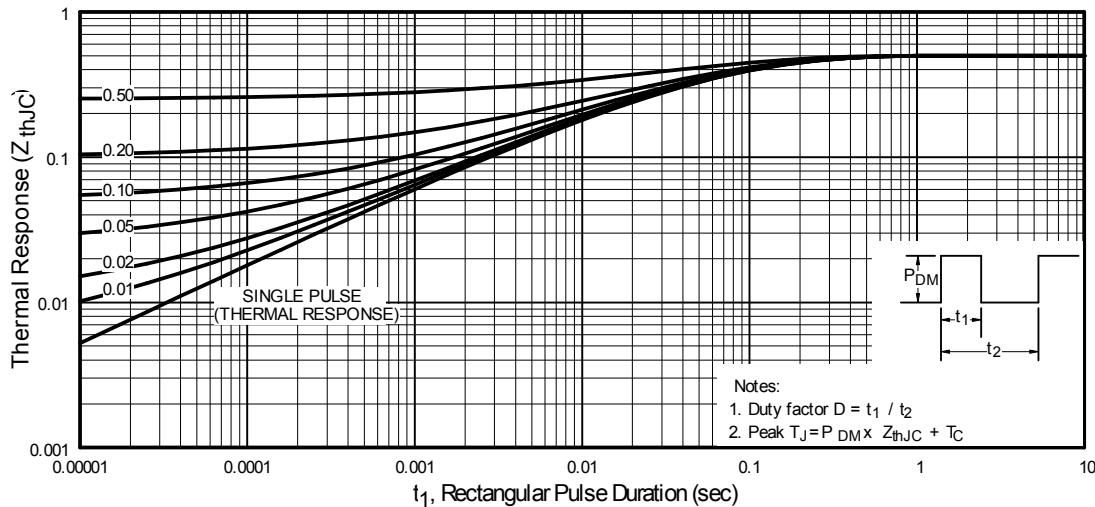


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case


**Pre-Irradiation**

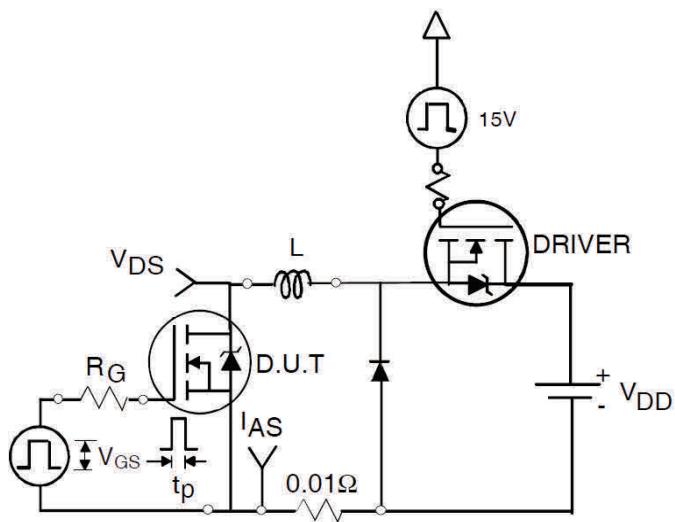


**Fig 12a.** Unclamped Inductive Test Circuit

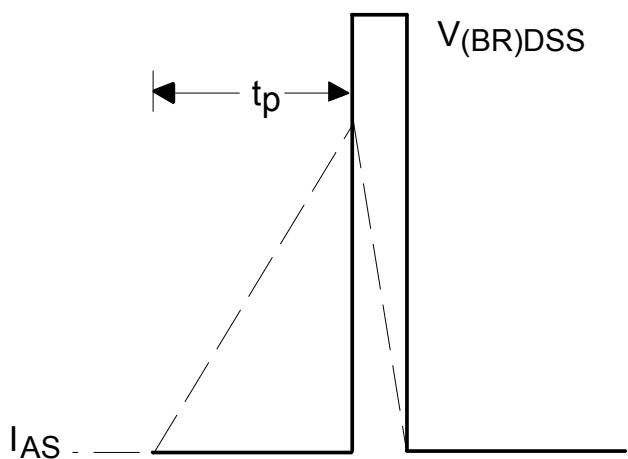


**Fig 12b.** Unclamped Inductive Waveforms

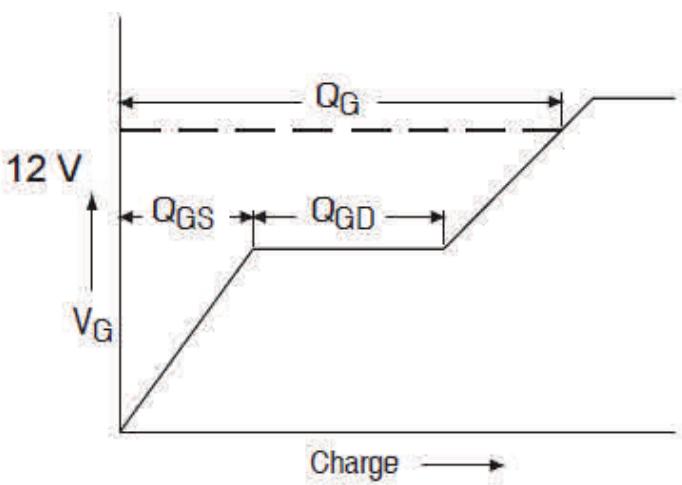


**Fig 13a.** Gate Charge Waveform

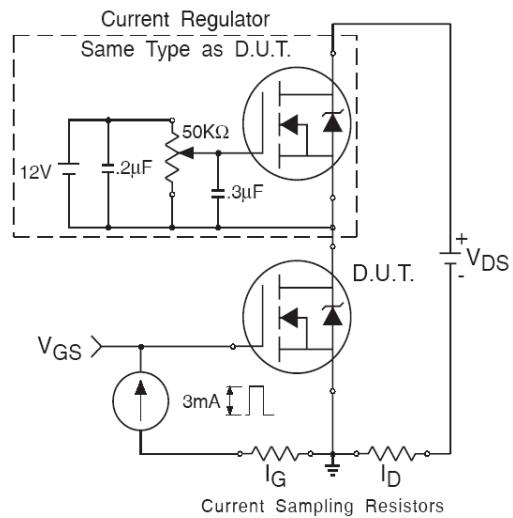

**Fig 13b.** Gate Charge Test Circuit

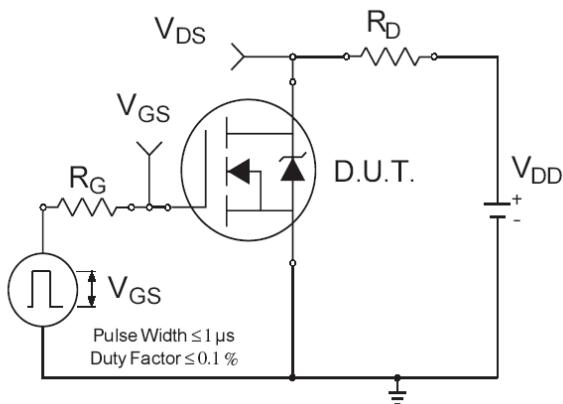


**Fig 14a.** Switching Time Test Circuit

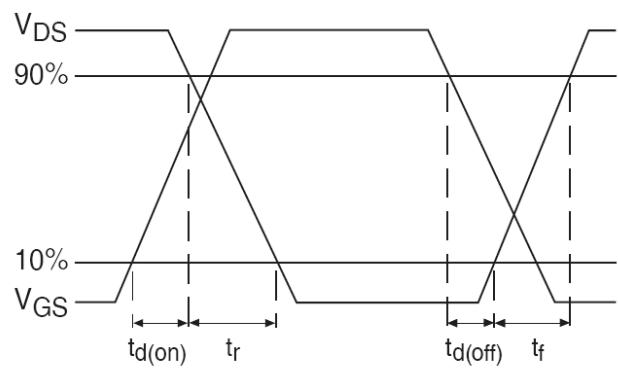

**Fig 14b.** Switching Time Waveforms

## Case Outline and Dimensions — TO-254AA

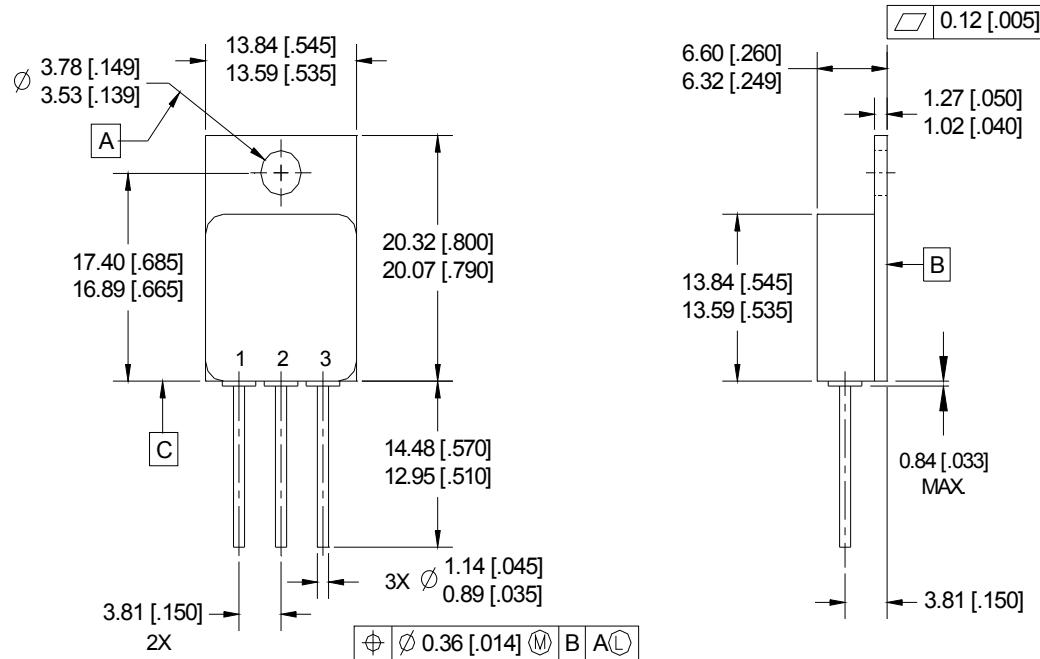

### NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
3. CONTROLLING DIMENSION: INCH.
4. CONFORMS TO JEDEC OUTLINE TO-254AA.

### PIN ASSIGNMENTS

- 1 = DRAIN
- 2 = SOURCE
- 3 = GATE

### BERYLLIA WARNING PER MIL-PRF-19500

Package containing beryllia shall not be ground, sandblasted, machined, or have other operations performed on them which will produce beryllia or beryllium dust. Furthermore, beryllium oxide packages shall not be placed in acids that will produce fumes containing beryllium.

### **IMPORTANT NOTICE**

The information given in this document shall be in no event regarded as guarantee of conditions or characteristic. The data contained herein is a characterization of the component based on internal standards and is intended to demonstrate and provide guidance for typical part performance. It will require further evaluation, qualification and analysis to determine suitability in the application environment to confirm compliance to your system requirements.

With respect to any example hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind including without limitation warranties on non-infringement of intellectual property rights and any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's product and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of any customer's technical departments to evaluate the suitability of the product for the intended applications and the completeness of the product information given in this document with respect to applications.

For further information on the product, technology, delivery terms and conditions and prices, please contact your local sales representative or go to ([www.infineon.com/hirel](http://www.infineon.com/hirel)).

### **WARNING**

Due to technical requirements products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.



电子元器件线上授权代理开拓者  
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon Technologies\(英飞凌\)](#)