


IRG4PC30FDPbF

INSULATED GATE BIPOLAR TRANSISTOR WITH
 ULTRAFAST SOFT RECOVERY DIODE

Fast CoPack IGBT

Features


- Fast: Optimized for medium operating frequencies (1-5 kHz in hard switching, >20 kHz in resonant mode).
- Generation 4 IGBT design provides tighter parameter distribution and higher efficiency than Generation 3
- IGBT co-packaged with HEXFRED™ ultrafast, ultra-soft-recovery anti-parallel diodes for use in bridge configurations
- Industry standard TO-247AC package
- Lead-Free



| |
|-----------------------------|
| $V_{CES} = 600V$ |
| $V_{CE(on) typ.} = 1.59V$ |
| @ $V_{GE} = 15V, I_C = 17A$ |

Benefits

- Generation -4 IGBT's offer highest efficiencies available
- IGBT's optimized for specific application conditions
- HEXFRED diodes optimized for performance with IGBT's . Minimized recovery characteristics require less/no snubbing
- Designed to be a "drop-in" replacement for equivalent industry-standard Generation 3 IR IGBT's



Absolute Maximum Ratings

| | Parameter | Max. | Units |
|---------------------------|--|---------------------|-------|
| V_{CES} | Collector-to-Emitter Voltage | 600 | V |
| $I_C @ T_C = 25^\circ C$ | Continuous Collector Current | 31 | A |
| $I_C @ T_C = 100^\circ C$ | Continuous Collector Current | 17 | |
| I_{CM} | Pulsed Collector Current ① | 120 | |
| I_{LM} | Clamped Inductive Load Current ② | 120 | |
| $I_F @ T_C = 100^\circ C$ | Diode Continuous Forward Current | 12 | |
| I_{FM} | Diode Maximum Forward Current | 120 | |
| V_{GE} | Gate-to-Emitter Voltage | ± 20 | V |
| $P_D @ T_C = 25^\circ C$ | Maximum Power Dissipation | 100 | W |
| $P_D @ T_C = 100^\circ C$ | Maximum Power Dissipation | 42 | |
| T_J | Operating Junction and Storage Temperature Range | -55 to +150 | °C |
| T_{STG} | | | |
| | | | |
| | Mounting Torque, 6-32 or M3 Screw. | 10 lbf•in (1.1 N•m) | |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|---|----------|------|--------|
| $R_{\theta JC}$ | Junction-to-Case - IGBT | --- | 1.2 | °C/W |
| $R_{\theta JC}$ | Junction-to-Case - Diode | --- | 2.5 | |
| $R_{\theta CS}$ | Case-to-Sink, Flat, Greased Surface | 0.24 | --- | |
| $R_{\theta JA}$ | Junction-to-Ambient, typical socket mount | --- | 40 | |
| Wt | Weight | 6 (0.21) | --- | g (oz) |

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|--|---|------|------|------|-------|--|
| V _{(BR)CES} | Collector-to-Emitter Breakdown Voltage ^③ | 600 | — | — | V | V _{GE} = 0V, I _C = 250μA |
| ΔV _{(BR)CES} /ΔT _J | Temperature Coeff. of Breakdown Voltage | — | 0.69 | — | V/°C | V _{GE} = 0V, I _C = 1.0mA |
| V _{CE(on)} | Collector-to-Emitter Saturation Voltage | — | 1.59 | 1.8 | V | I _C = 17A, V _{GE} = 15V I _C = 31A I _C = 17A, T _J = 150°C See Fig. 2, 5 |
| | | — | 1.99 | — | | |
| | | — | 1.70 | — | | |
| V _{GE(th)} | Gate Threshold Voltage | 3.0 | — | 6.0 | — | V _{CE} = V _{GE} , I _C = 250μA |
| ΔV _{GE(th)} /ΔT _J | Temperature Coeff. of Threshold Voltage | — | -11 | — | mV/°C | V _{CE} = V _{GE} , I _C = 250μA |
| g _{fe} | Forward Transconductance ^④ | 6.1 | 10 | — | S | V _{CE} = 100V, I _C = 17A |
| I _{CES} | Zero Gate Voltage Collector Current | — | — | 250 | μA | V _{GE} = 0V, V _{CE} = 600V V _{GE} = 0V, V _{CE} = 600V, T _J = 150°C |
| | | — | — | 2500 | | |
| V _{FM} | Diode Forward Voltage Drop | — | 1.4 | 1.7 | V | I _C = 12A I _C = 12A, T _J = 150°C See Fig. 13 |
| | | — | 1.3 | 1.6 | | |
| I _{GES} | Gate-to-Emitter Leakage Current | — | — | ±100 | nA | V _{GE} = ±20V |

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|--------------------------|---|------|------|------|-------|--|
| Q _g | Total Gate Charge (turn-on) | — | 51 | 77 | nC | I _C = 17A V _{CC} = 400V V _{GE} = 15V See Fig. 8 |
| Q _{ge} | Gate - Emitter Charge (turn-on) | — | 7.9 | 12 | | |
| Q _{gc} | Gate - Collector Charge (turn-on) | — | 19 | 28 | | |
| t _{d(on)} | Turn-On Delay Time | — | 42 | — | ns | T _J = 25°C I _C = 17A, V _{CC} = 480V V _{GE} = 15V, R _G = 23Ω Energy losses include "tail" and diode reverse recovery. See Fig. 9, 10, 11, 18 |
| t _r | Rise Time | — | 26 | — | | |
| t _{d(off)} | Turn-Off Delay Time | — | 230 | 350 | | |
| t _f | Fall Time | — | 160 | 230 | mJ | T _J = 150°C, See Fig. 9, 10, 11, 18 I _C = 17A, V _{CC} = 480V V _{GE} = 15V, R _G = 23Ω Energy losses include "tail" and diode reverse recovery. |
| E _{on} | Turn-On Switching Loss | — | 0.63 | — | | |
| E _{off} | Turn-Off Switching Loss | — | 1.39 | — | | |
| E _{ts} | Total Switching Loss | — | 2.02 | 3.9 | mJ | Measured 5mm from package |
| t _{d(on)} | Turn-On Delay Time | — | 42 | — | | |
| t _r | Rise Time | — | 27 | — | | |
| t _{d(off)} | Turn-Off Delay Time | — | 310 | — | pF | V _{GE} = 0V V _{CC} = 30V f = 1.0MHz See Fig. 7 |
| t _f | Fall Time | — | 310 | — | | |
| E _{ts} | Total Switching Loss | — | 3.2 | — | | |
| L _E | Internal Emitter Inductance | — | 13 | — | nH | See Fig. 7 |
| C _{ies} | Input Capacitance | — | 1100 | — | | |
| C _{oes} | Output Capacitance | — | 74 | — | | |
| C _{res} | Reverse Transfer Capacitance | — | 14 | — | ns | T _J = 25°C T _J = 125°C See Fig. 14 I _F = 12A V _R = 200V |
| t _{rr} | Diode Reverse Recovery Time | — | 42 | 60 | | |
| I _{rr} | Diode Peak Reverse Recovery Current | — | 80 | 120 | | |
| Q _{rr} | Diode Reverse Recovery Charge | — | 3.5 | 6.0 | A | T _J = 25°C T _J = 125°C See Fig. 15 |
| | | — | 5.6 | 10 | | |
| di _{(rec)M} /dt | Diode Peak Rate of Fall of Recovery During t _b | — | 80 | 180 | nC | T _J = 25°C T _J = 125°C See Fig. 16 |
| | | — | 220 | 600 | | |
| di _{(rec)M} /dt | Diode Peak Rate of Fall of Recovery During t _b | — | 180 | — | A/μs | T _J = 25°C T _J = 125°C See Fig. 17 |
| | | — | 120 | — | | |

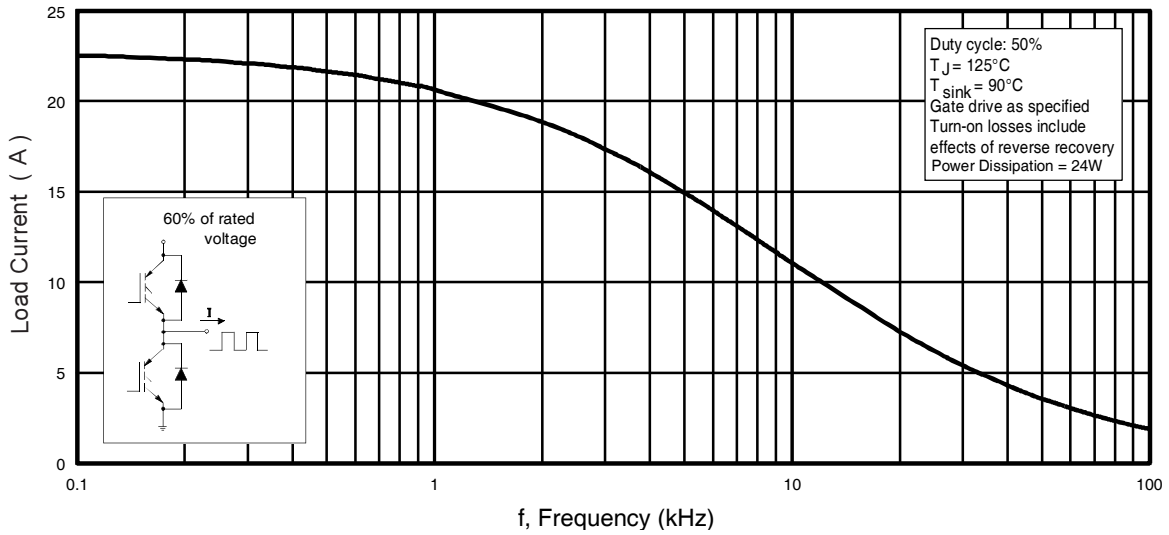


Fig. 1 - Typical Load Current vs. Frequency
 (Load Current = I_{RMS} of fundamental)

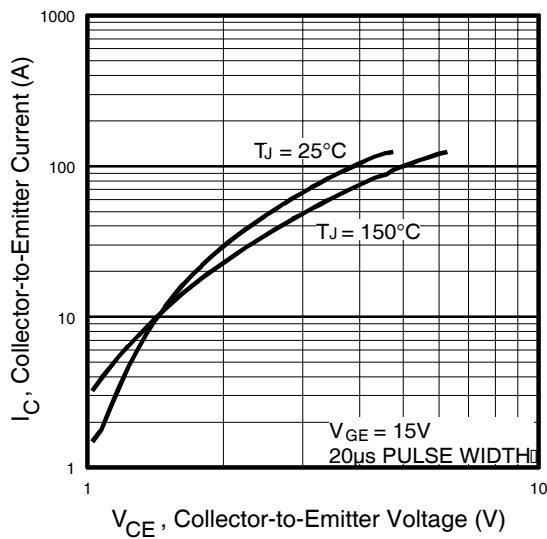


Fig. 2 - Typical Output Characteristics

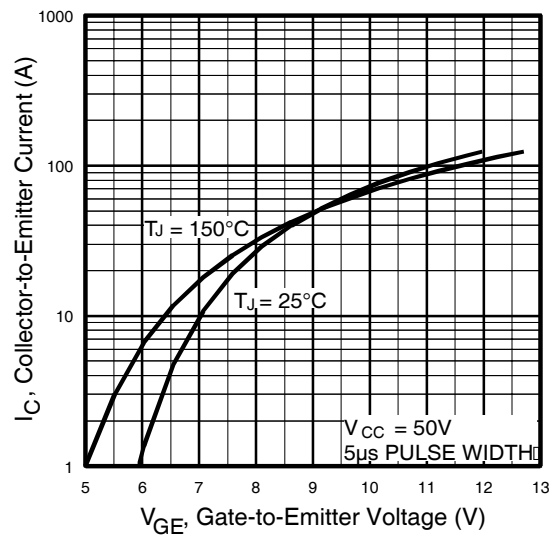


Fig. 3 - Typical Transfer Characteristics

IRG4PC30FDPbF

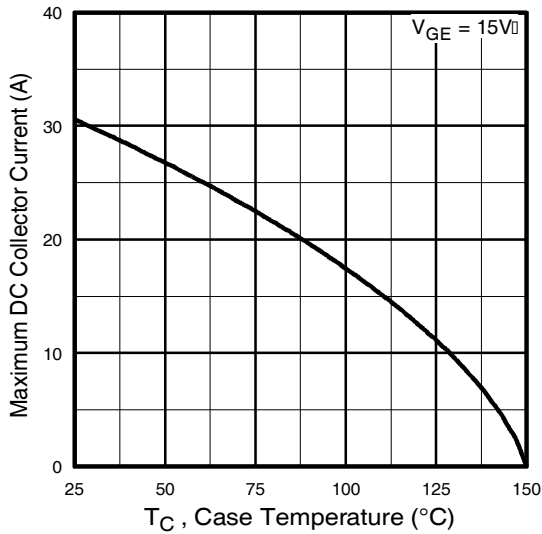


Fig. 4 - Maximum Collector Current vs. Case Temperature

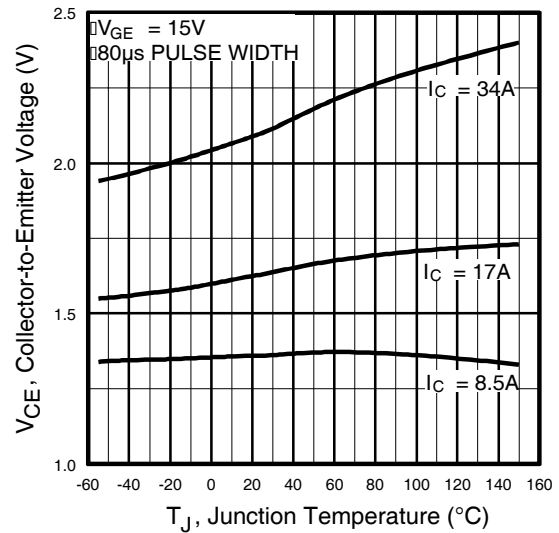


Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature

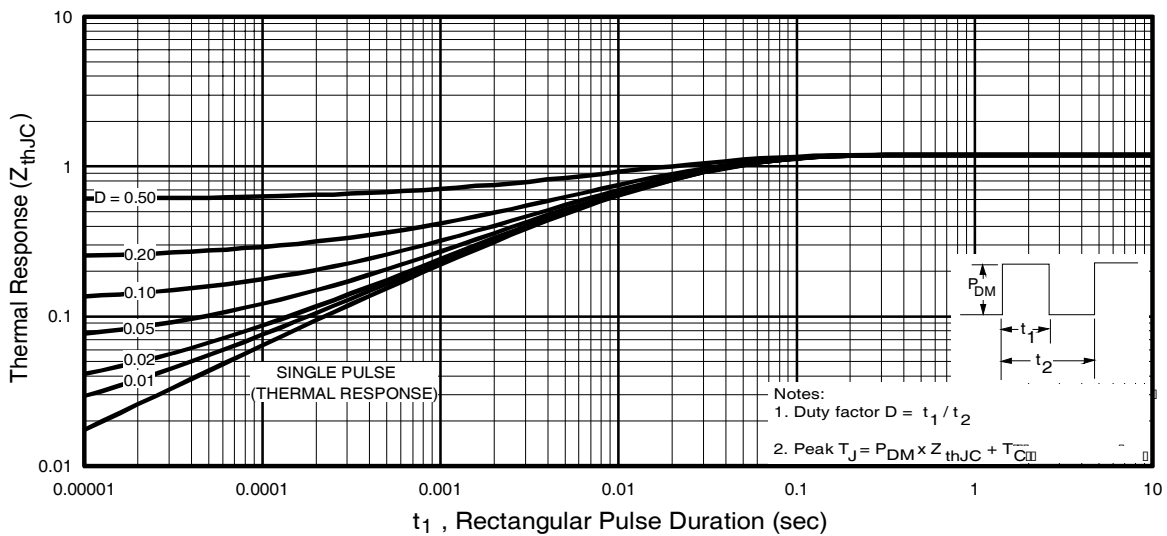


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRG4PC30FDPbF

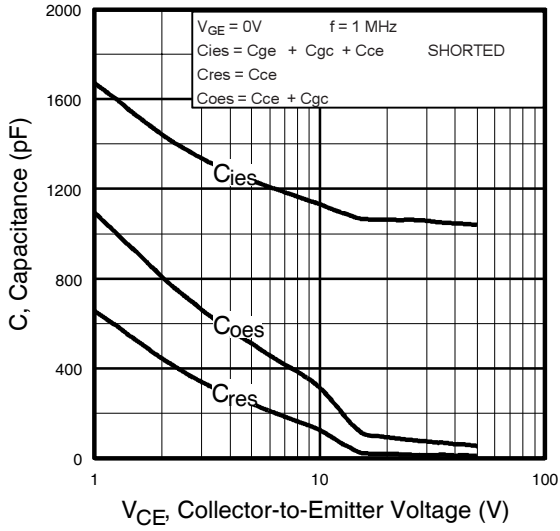


Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

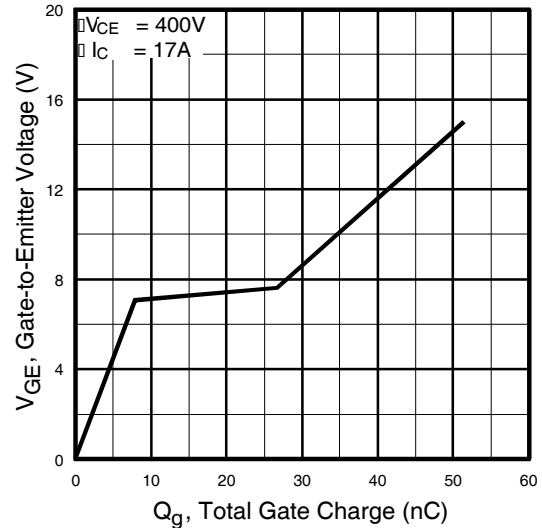


Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

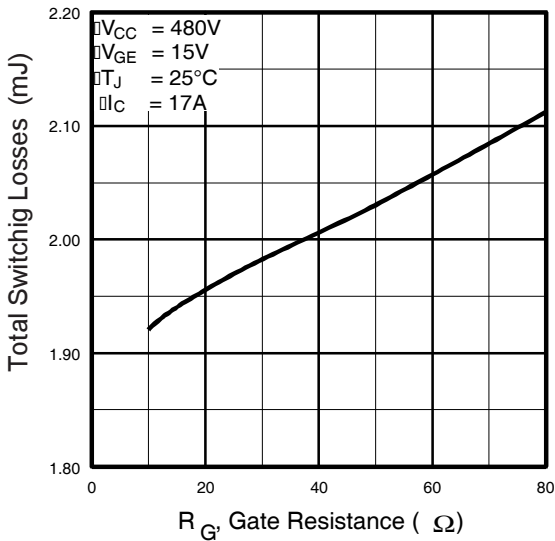


Fig. 9 - Typical Switching Losses vs. Gate Resistance

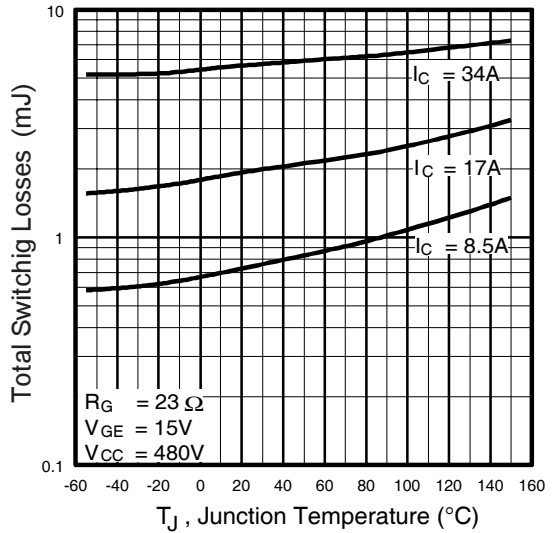


Fig. 10 - Typical Switching Losses vs. Junction Temperature

IRG4PC30FDPbF

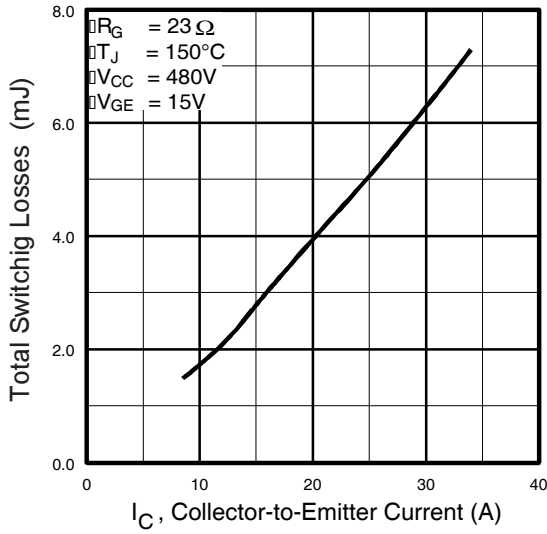


Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

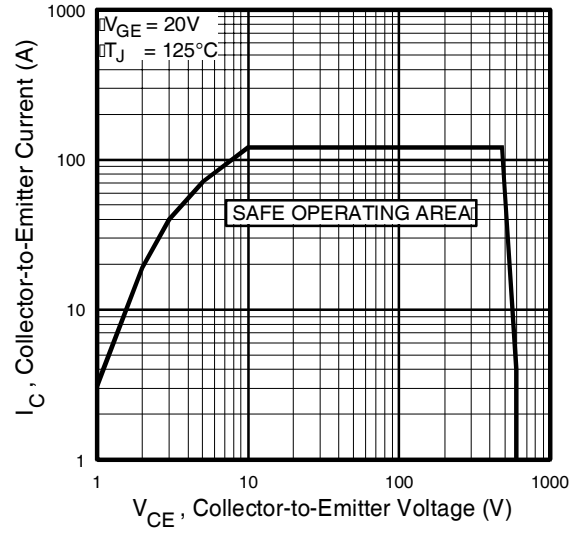


Fig. 12 - Turn-Off SOA

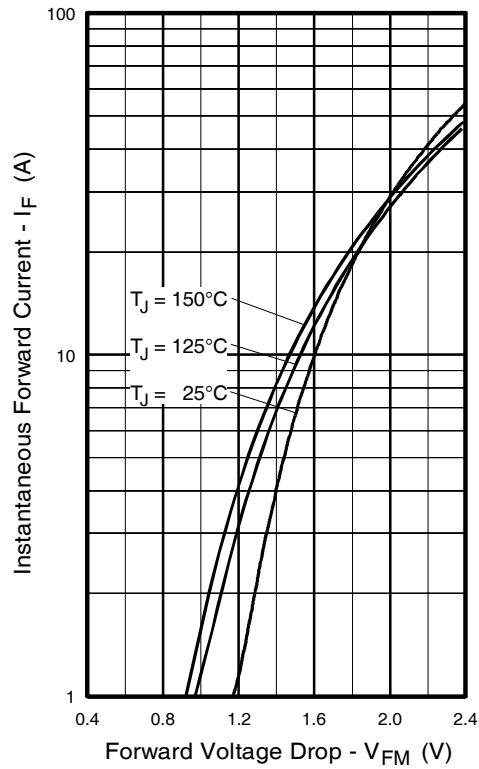


Fig. 13 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current

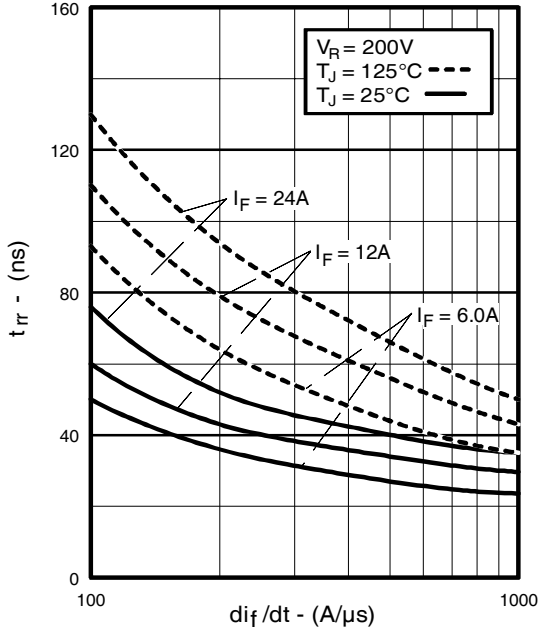


Fig. 14 - Typical Reverse Recovery vs. di_f/dt

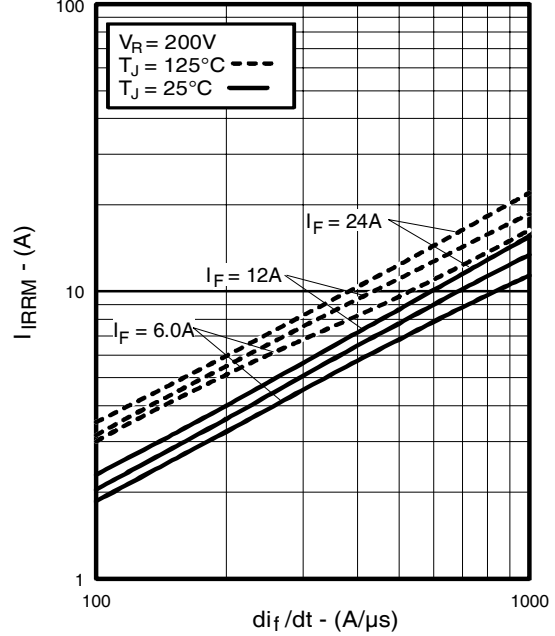


Fig. 15 - Typical Recovery Current vs. di_f/dt

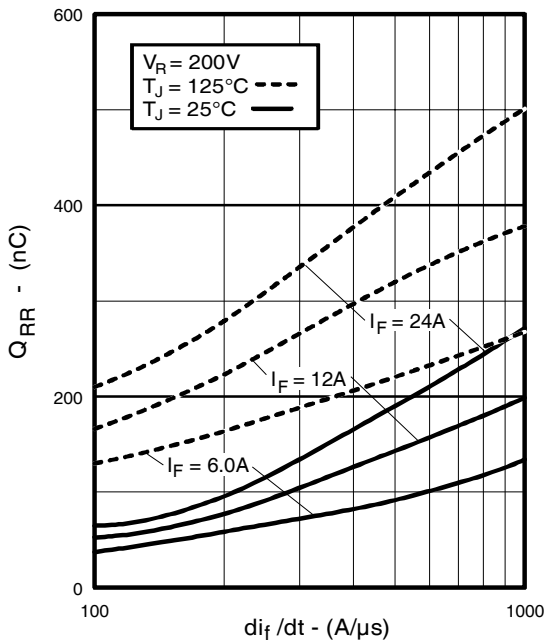


Fig. 16 - Typical Stored Charge vs. di_f/dt

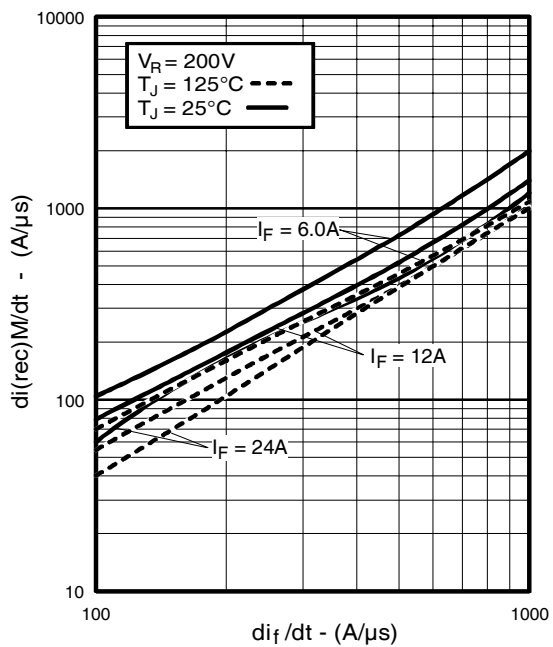


Fig. 17 - Typical $di_{(rec)M}/dt$ vs. di_f/dt

IRG4PC30FDPbF

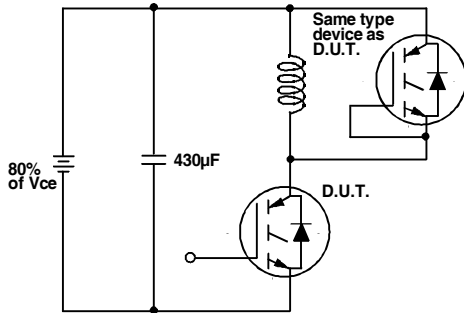


Fig. 18a - Test Circuit for Measurement of I_{LM} , E_{on} , $E_{off}(\text{diode})$, t_{rr} , Q_{rr} , I_{rr} , $t_{d(on)}$, t_r , $t_{d(off)}$, t_f

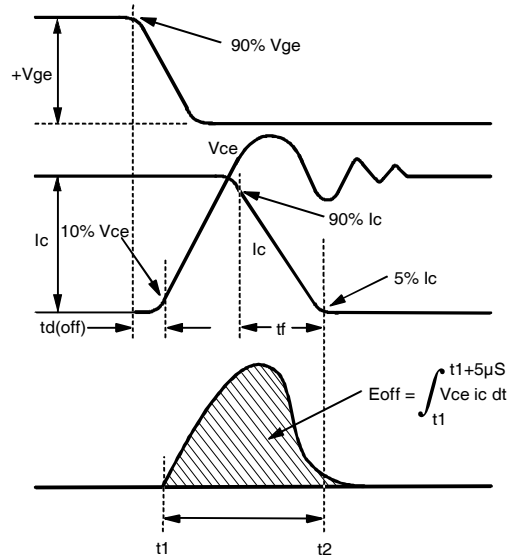


Fig. 18b - Test Waveforms for Circuit of Fig. 18a, Defining E_{off} , $t_{d(off)}$, t_f

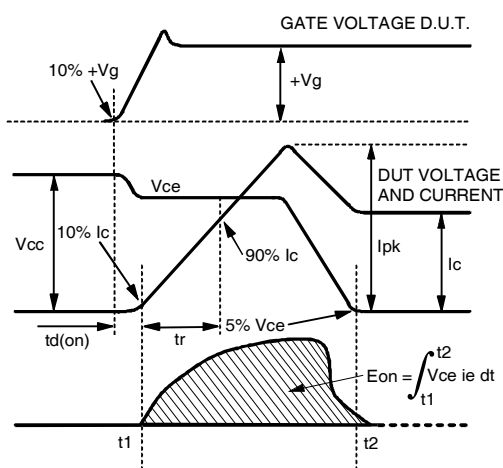


Fig. 18c - Test Waveforms for Circuit of Fig. 18a, Defining E_{on} , $t_{d(on)}$, t_r

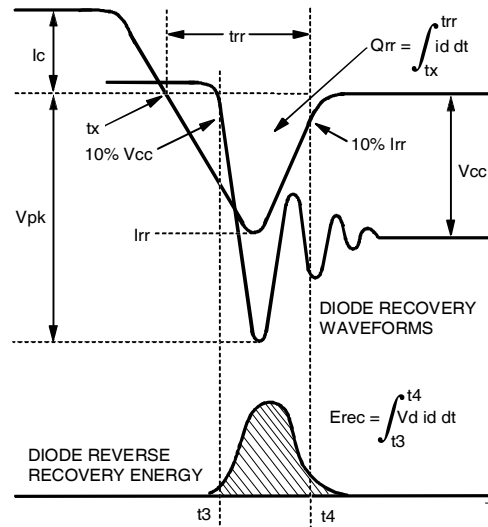


Fig. 18d - Test Waveforms for Circuit of Fig. 18a, Defining E_{rec} , t_{rr} , Q_{rr} , I_{rr}

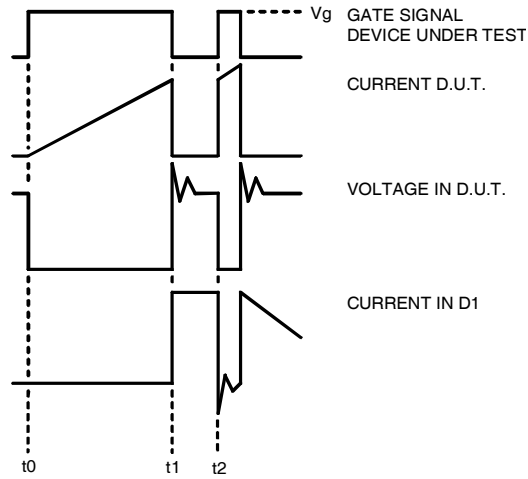


Figure 18e.

18

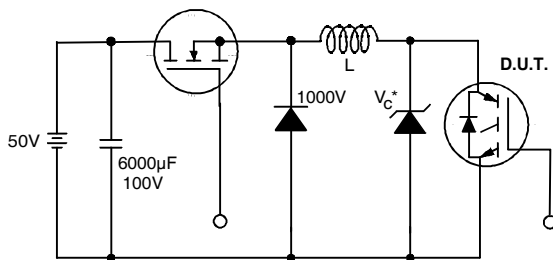


Figure 19.

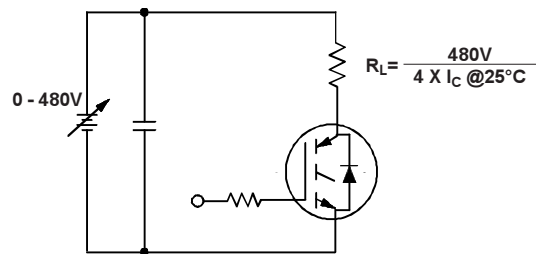


Figure 20.

IRG4PC30FDPbF


International
IR Rectifier

Notes:

- ① Repetitive rating: $V_{GE}=20V$; pulse width limited by maximum junction temperature (figure 20)
- ② $V_{CC}=80\%(V_{CES})$, $V_{GE}=20V$, $L=10\mu H$, $R_G = 23\Omega$ (figure 19)
- ③ Pulse width $\leq 80\mu s$; duty factor $\leq 0.1\%$.
- ④ Pulse width $5.0\mu s$, single shot.

TO-247AC Package Outline


Dimensions are shown in millimeters (inches)

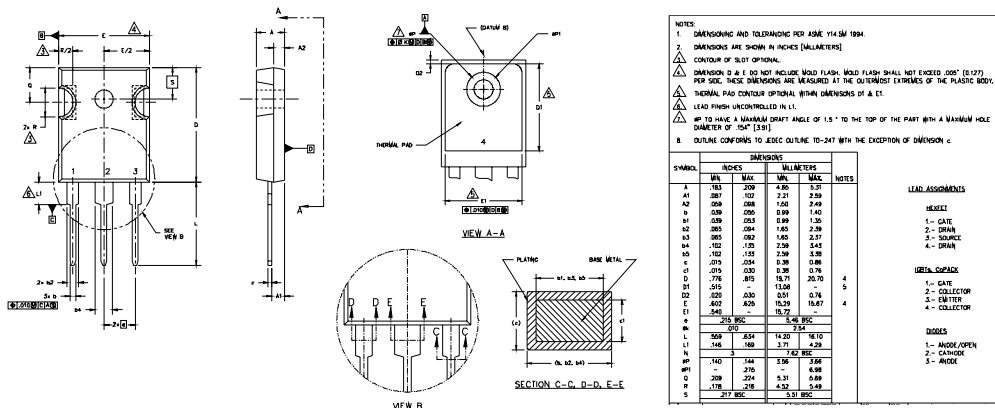

TO-247AC Part Marking Information

EXAMPLE: THIS IS AN IRFPE30
WITH ASSEMBLY
LOT CODE 5657
ASSEMBLED ON WW 35, 2000
IN THE ASSEMBLY LINE "H"

Note: "P" in assembly line position indicates "Lead-Free"

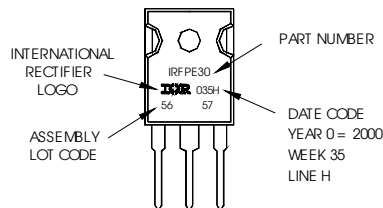

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.

Data and specifications subject to change without notice. 07/04

Note: For the most current drawings please refer to the IR website at:
<http://www.irf.com/package/>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon Technologies\(英飞凌\)](#)