

Jamicon Series : FG

Teapo Series : FG Standard Series


- Endurance:105°C,2000hrs
- Recommended Applications:Lighting Equipment,Power Supply,Panel,Audio,UPS
- Corresponding product to RoHS




**Specifications**

Item	Characteristics		
Category Temperature Range	-55 ~ +105°C		
Rated Voltage Range	2.5~25VDC		
Rated Capacitance Range	22~ 2200 μF		
Capacitance Tolerance	± 20 % (120Hz , 20°C)		
Surge Voltage	Rated voltage ( V ) x 1.15		
Leakage Current ( 20°C )	I ≤ 0.2CV or 300( μ A )whichever is greater (After rated voltage applied for 2 minutes ) I : Leakage Current ( μ A ) C : Capacitance( μ F ) V : Rated Voltage Range(VDC)		
Dissipation Factor (MAX) (tan δ ) (120Hz ,20°C)	WV	2.5~10	12~25
	tan δ	0.08	0.12
Endurance	After applying rated voltage for 2000 hours at 105°C , the capacitor shall meet the following requirement °		
	Appearance	No significant damage	
	Capacitance Change	Within ±20% of the initial value	
	Dissipation Factor	Not more than 150% of the initial specified value	
	Equivalent Series Resistance	Not more than 150% of the initial specified value	
Leakage Current	Not more than the initial specified value		
Humidity Test	after subjecting 90 to 95% RH for 1000 hours at 60°C , the capacitors shall meet the requirement as Endurance °		
Surge voltage test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds,the capacitors shall meet the requirement as Endurance		

**Diagram of Dimensions**

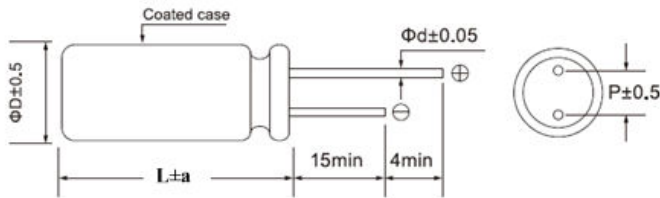

**Marking : case with red printing**

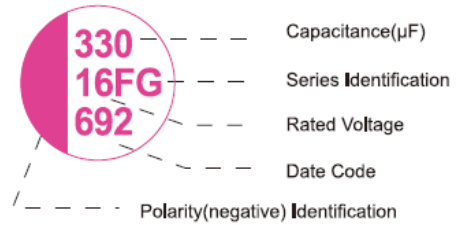

SIZE	ΦD x L	P	φ d	a
C07	5x7	2.0	0.5	1.5
C09	5x9	2.0	0.5	1.0
D07	5x7	2.5	0.5	1.0
D09	5x9	2.5	0.5	1.0
D11	5x11	2.5	0.5	1.0
E01	6.3x5.4	2.5	0.45	1.0
E06	6.3x6	2.5	0.5	1.5
E07	6.3x7	2.5	0.5	1.5
E08	6.3x8	2.5	0.5or0.6	1.0
E09	6.3x9	2.5	0.5	1.0

SIZE	ΦD x L	P	φ d	a
E11	6.3x11	2.5	0.5	1.0
G08	8x8	3.5	0.6	1.0
G09	8x9	3.5	0.6	1.0
G1B	8x11.5	3.5	0.6	1.0
G12	8x12	3.5	0.6	1.0
G15	8x15	3.5	0.6	1.5
H1A	10x10.5	5.0	0.6	1.0
H1C	10x12.5	5.0	0.6	1.0
H13	10x13	5.0	0.6	1.0
H16	10x16	5.0	0.6	1.0

**Multiplier for Ripple Current**

Frequency(HZ)	120 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F ≤ 500K
Coefficient	0.05	0.30	0.70	1.00

Jamicon Series : FG

Teapo Series : FG

■ Dimensions, Rated Ripple Current, Equivalent Series Resistance

Rated ( Surge ) Voltage(V)	Capacitance ( μ F)	SIZE Φ DxL(mm)	RIPPLE (mA/rms,105°C 100KHz)	ESR (mΩ,20°C 100KHz)	Rated ( Surge ) Voltage(V)	Capacitance ( μ F)	SIZE Φ DxL(mm)	RIPPLE (mA/rms,105°C 100KHz)	ESR (mΩ,20°C 100KHz)
2.5 (2.88)	560	6.3x6	4000	10	7.5 (8.62)	390	5x9	3100	15
		6.3x8	3160	20		470	5x9	3100	15
	820	6.3x8	3160	20		500	5x9	3100	12
		8x11.5	5600	7		680	6.3x9	3500	12
	1500	10x12.5	5600	7	10 (11.5)	68	6.3x5.4	1810	30
2200	10x12.5	5600	7	100		5x7	3500	11	
4 (4.6)	560	6.3x8	3160			20	6.3x5.4	2320	27
		6.3x8	3160	20		150	6.3x5.4	2200	30
	680	8x11.5	5600	7		180	6.3x8	2820	25
		6.3x9	3160	20		220	6.3x8	2820	25
	820	10x12.5	5600	7		270	6.3x8	2820	25
		8x11.5	5600	7		330	6.3x8	2820	25
		10x12.5	5600	7			8x8	3500	11
1500	8x11.5	5600	7	470		8x9	2820	25	
	2200	10x12.5	5600			7	8x11.5	5600	8
6.3 (7.25)	47	6.3x5.4	1810			30	10x10.5	5050	8
	100	6.3x5.4	1810	40		560	8x11.5	5600	8
	180	6.3x5.4	1810	30			10x12.5	6100	8
	220	5x7	3500	11		680	8x11.5	5600	8
		6.3x5.4	1810	30	10x12.5		6100	8	
	270	6.3x6	3160	15	820	8x11.5	5600	8	
		5x7	3500	11		10x12.5	6100	8	
	330	6.3x7	3500	11	1200	10x12.5	6100	8	
		5x7	3500	11		1500	10x12.5	6100	8
		6.3x5.4	1810	30	22		5x7	2200	30
	6.3x6	3390	22	33		6.3x5.4	2200	30	
	390	5x9	3500		11	47	6.3x5.4	1650	35
		6.3x9	3500	8	68		6.3x6	2610	25
	450	5x9	3500	11		100	6.3x5.4	1650	35
		6.3x6	3390	22	150		6.3x5.4	2490	24
	470	5x9	3190	28		180	6.3x8	2820	24
		6.3x6	3390	22	270		6.3x8	2820	25
		6.3x8	3800	10		6.3x9	3100	20	
		8x8	4200	8	8x8	3800	15		
	560	6.3x8	4000	10	330	8x11.5	5000	11	
		8x8	4800	12		10x10.5	5050	14	
	680	6.3x9	3500	8		10x12.5	6100	10	
		8x11.5	5600	7	470	8x11.5	5000	11	
	820	6.3x9	3500	8		10x10.5	5050	14	
		8x11.5	5600	7	10x12.5	6100	10		
		10x10.5	5050	8	560	8x11.5	5000	11	
	10x12.5	5600	7	10x10.5		5050	11		
	1000	8x8	4770	10	10x12.5	6100	10		
		8x11.5	5600	7	16 (18.4)	6.3x9	3100	20	
	1200	8x11.5	5600	7		330	8x11.5	5000	11
10x10.5		5050	8	10x10.5	5050		14		
1500	8x11.5	5600	7	470	10x12.5	6100	10		
	10x10.5	5050	8		560	8x11.5	5000	11	
	10x12.5	5600	7	10x10.5		5050	11		
2200	10x12.5	5600	7	10x12.5	6100	10			
6.8 (7.82)	180	5x7	2300	20	16 (18.4)	680	8x11.5	5000	11
	220	5x7	2500	20		820	10x12.5	6100	10
	270	5x7	2500	20			1000	8x12	5000
	330	5x9	3100	15		10x12.5		5000	10
	390	5x9	3100	15		25 (28.75)	8x15	5000	10
	450	6.3x6	3100	15	10x12.5		5050	14	
	680	6.3x9	3500	11	33	6.3x8	1650	35	
	820	6.3x9	3500	11		47	6.3x10.5	1980	35
	1000	6.3x11	4200	10			68	8x8	2980
7.5 (8.62)	270	5x9	2690	15					

单击下面可查看定价，库存，交付和生命周期等信息

[>>JAMICON\(凯美\)](#)