



2A SURFACE MOUNT SCHOTTKY BRIDGE

**FEATURES:**


- Reverse Voltage - 40 to 200 V
- Forward Current - 2 A
- High Surge Current Capability
- Designed for Surface Mount Application

**MECHANICAL DATA**

- Case: MBS
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 100mg / 0.0035oz

**PINNING**

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

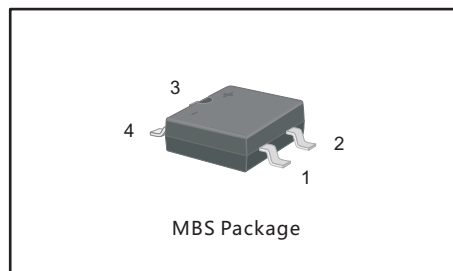

**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	MB24S	MB26S	MB28S	MB210S	MB220S	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	40	60	80	100	200	V
Maximum RMS voltage	$V_{RMS}$	28	42	56	70	140	V
Maximum DC Blocking Voltage	$V_{DC}$	40	60	80	100	200	V
Maximum Average Forward Rectified Current at $T_c = 100^\circ C$	$I_{F(AV)}$	2.0					A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	50		40			A
Max Instantaneous Forward Voltage at 2 A	$V_F$	0.55	0.70	0.85			V
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Reverse Voltage $T_a = 100^\circ C$	$I_R$	0.5 10			0.3 5		mA
Typical Junction Capacitance <sup>1)</sup>	$C_j$	220	80				pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	75					°C/W
Operating Junction Temperature Range	$T_j$	-55 ~ +150					°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150					°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.  
2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.



Fig.1 Forward Current Derating Curve

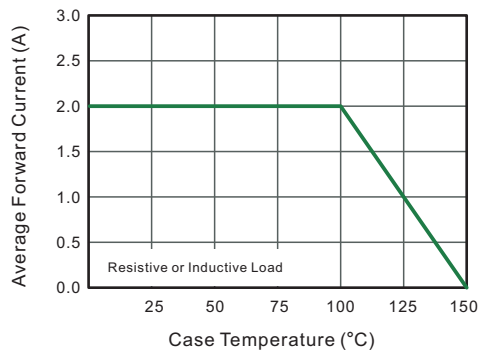


Fig.2 Typical Reverse Characteristics

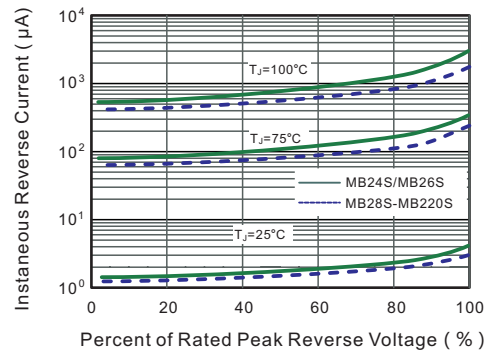


Fig.3 Typical Forward Characteristic

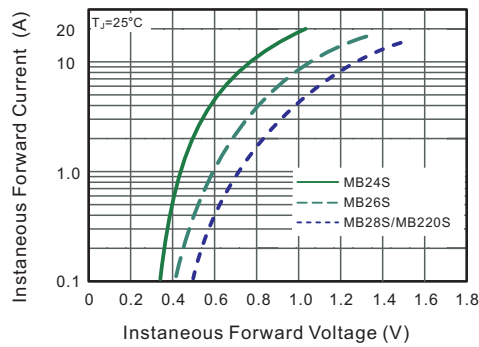


Fig.4 Typical Junction Capacitance

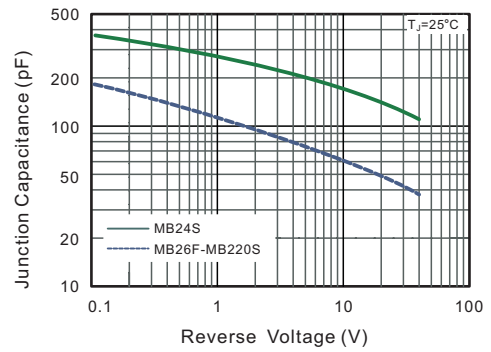


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


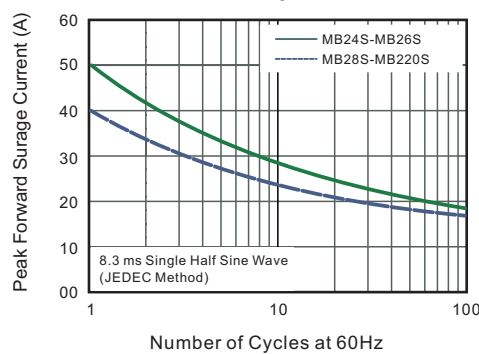


Fig.6- Typical Transient Thermal Impedance




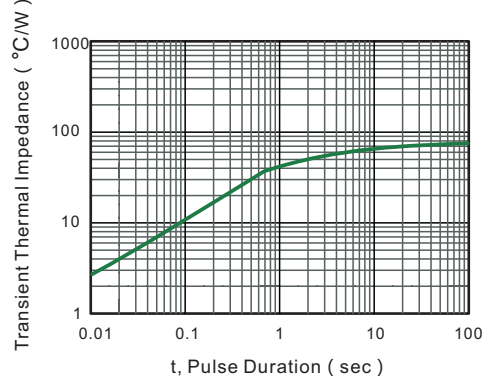


PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

MBS

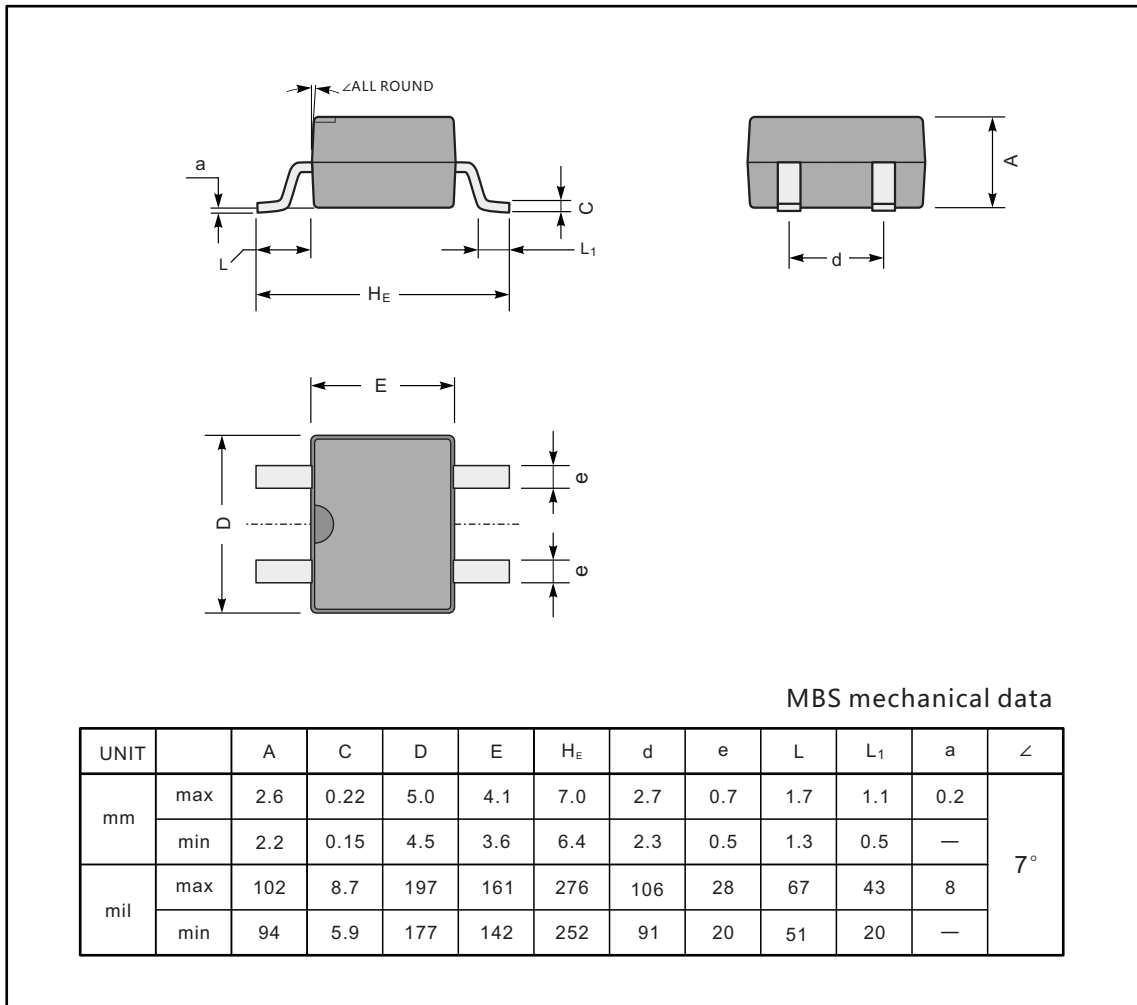


The recommended mounting pad size

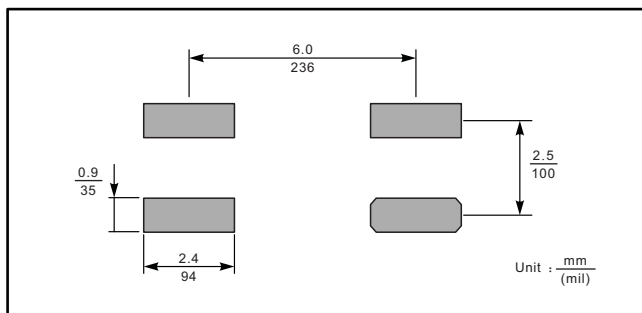

Marking

Type number	Marking code
MB24S	MB24S
MB26S	MB26S
MB28S	MB28S
MB210S	MB210S
MB220S	MB220S

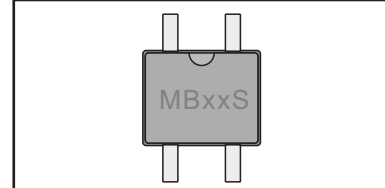

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导\)](#)