



### FEATURES


- For surface mounted applications
- Fast reverse recovery time
- Ideal for automated placement
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SOD-123W
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 16mg/0. 00056oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

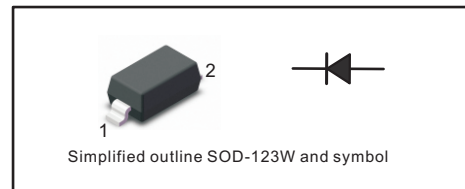

### Absolute Maximum Ratings at 25 °C

Parameter	Symbols	BAV19WA	BAV20WA	BAV21WA	Units
Non-Repetitive Peak Reverse Voltage	$V_{RM}$	120	200	250	V
RMS Reverse Voltage	$V_{RMS}$	71	106	141	V
Average Rectified Output Current	$I_O$	200			mA
Repetitive Peak Forward Current	$I_{FRM}$	625			mA
Non-repetitive Peak Forward Surge Current @t < 8. 3mS	$I_{FSM}$	2			A
Total Power Dissipation	$P_{tot}$	500			mW
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150			°C

### Characteristics at $T_a = 25\text{ °C}$

Parameter	Symbols	BAV19WA	BAV20WA	BAV21WA	Units
Reverse Breakdown Voltage at $I_R = 100\mu A$	$V_{(BR)R}$	120	200	250	V
Maximum Forward Voltage at 100 mA at 200 mA	$V_F$	1.00 1.25			V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_a = 25\text{ °C}$	$I_R$	0.1			$\mu A$
Typical Junction Capacitance at $V_R = 0V, f = 1MHz$	$C_j$	5			pF
Maximum Reverse Recovery Time <sup>(1)</sup>	$t_{rr}$	50			ns

(1) Measured with  $I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A$



Fig.1 Power Derating Curve

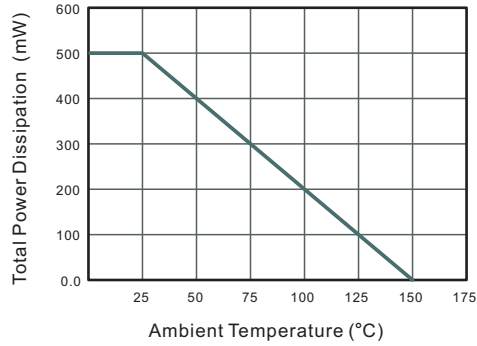


Fig.2 Typical Reverse Characteristics

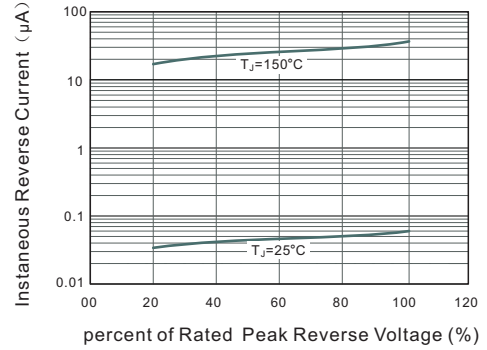


Fig.3 Typical Instantaneous Forward Characteristics


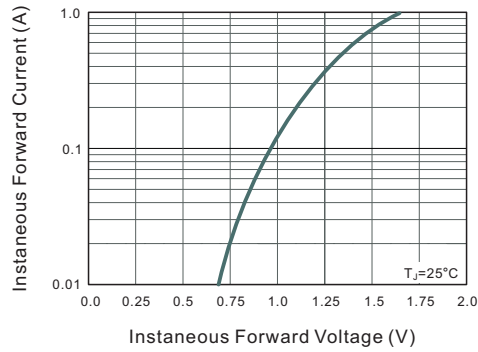


Fig.4 Typical Junction Capacitance




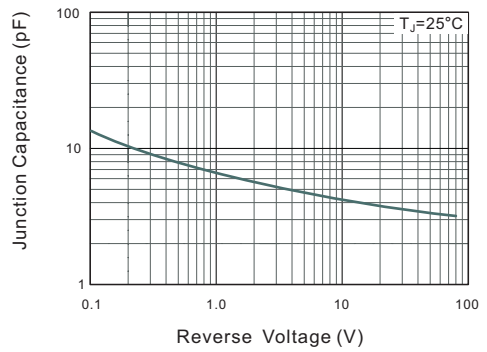

**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads


SOD-123W

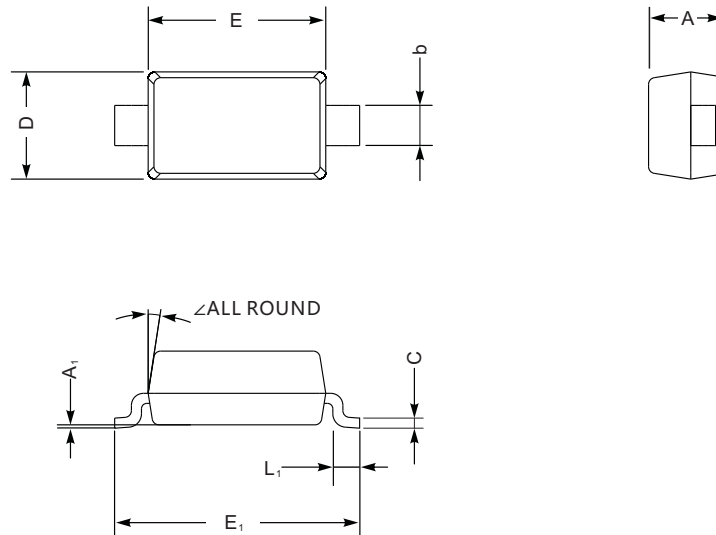

SOD-123W mechanical data

UNIT		A	C	D	E	E <sub>1</sub>	L <sub>1</sub>	b	A <sub>1</sub>	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	—	

**The recommended mounting pad size**

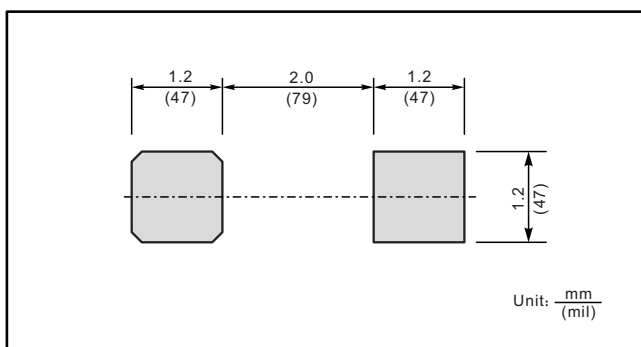

**Marking**

Type number	Marking code
BAV19WA	A8
BAV20WA	T2
BAV21WA	T3

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导微\)](#)