



Surface Mount Glass Passivated Fast Recovery Rectifier

Reverse Voltage -50~1000 V

Forward Current - 1.0A

FEATURES

- Low forward voltage drop
- Low leakage current
- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SOD-123
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 16mg/0.00056oz


Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |

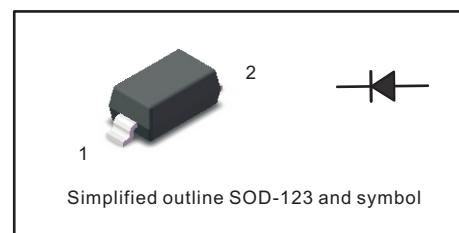

Simplified outline SOD-123 and symbol

| Parameter | Symbols | SGP1RW | SGP2RW | SGP3RW | SGP4RW | SGP5RW | SGP6RW | SGP7RW | Units | | | | |
|--|-----------------------------------|------------|--------|--------|--------|--------|--------|--------|-------|--|--|--|--|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | | |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | | | | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | | |
| Maximum Average Forward Rectified Current | I _{F(AV)} | 1 | | | | | | | A | | | | |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load | I _{FSM} | 15 | | | | | | | A | | | | |
| Maximum Instantaneous Forward Voltage at 1 A | V _F | 1.3 | | | | | | | V | | | | |
| Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C | I _R | 5 50 | | | | | | | µA | | | | |
| Typical Thermal Resistance ⁽¹⁾ | R _{θJA} | 60 | | | | | | | °C/W | | | | |
| Typical reverse recovery time ⁽²⁾ | trr | 150 | | | 250 | | 500 | | ns | | | | |
| Typical junction capacitance ⁽³⁾ | C _j | 5 | | | | | | | pF | | | | |
| Operating and Storage Temperature Range | T _j , T _{stg} | -55 ~ +150 | | | | | | | °C | | | | |

(1) P.C.B. mounted with 2" X 2" (5 X 5 cm) copper pad areas.

(2) Measured with I_f=0.5A, I_R=1A, I_{rr}=0.25A

(3) Measured at 1 MHz and applied reverse voltage of 4 V D.C



Fig.1 Forward Current Derating Curve

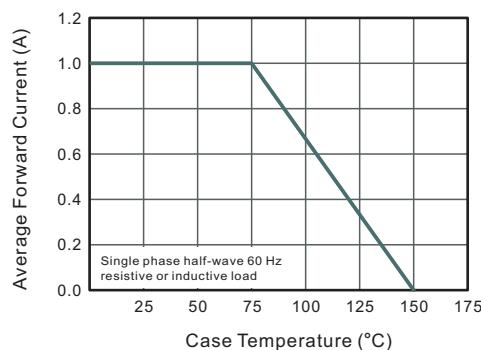


Fig.2 Typical Instantaneous Reverse Characteristics

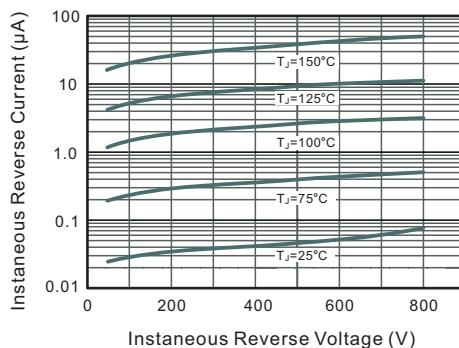


Fig.3 Typical Forward Characteristic

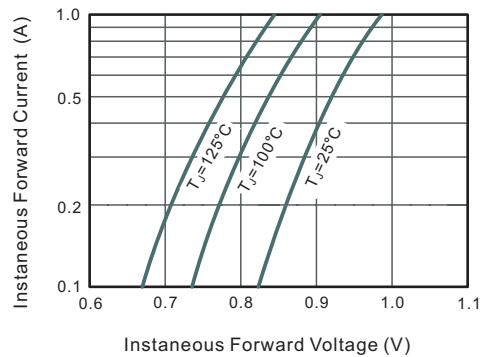


Fig.4 Typical Junction Capacitance


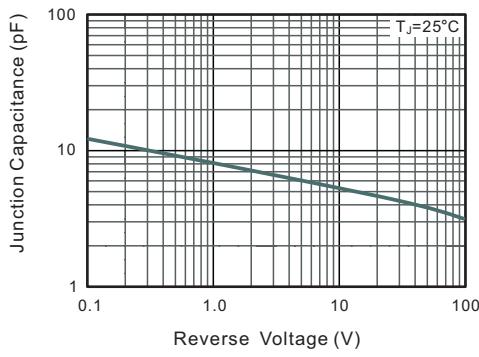


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




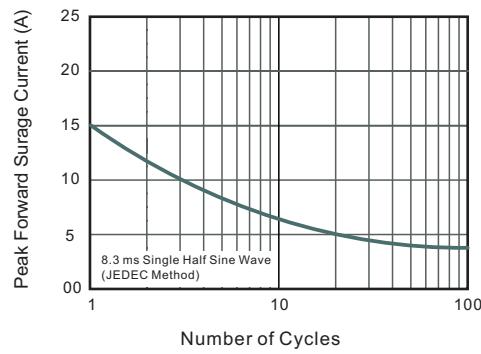


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

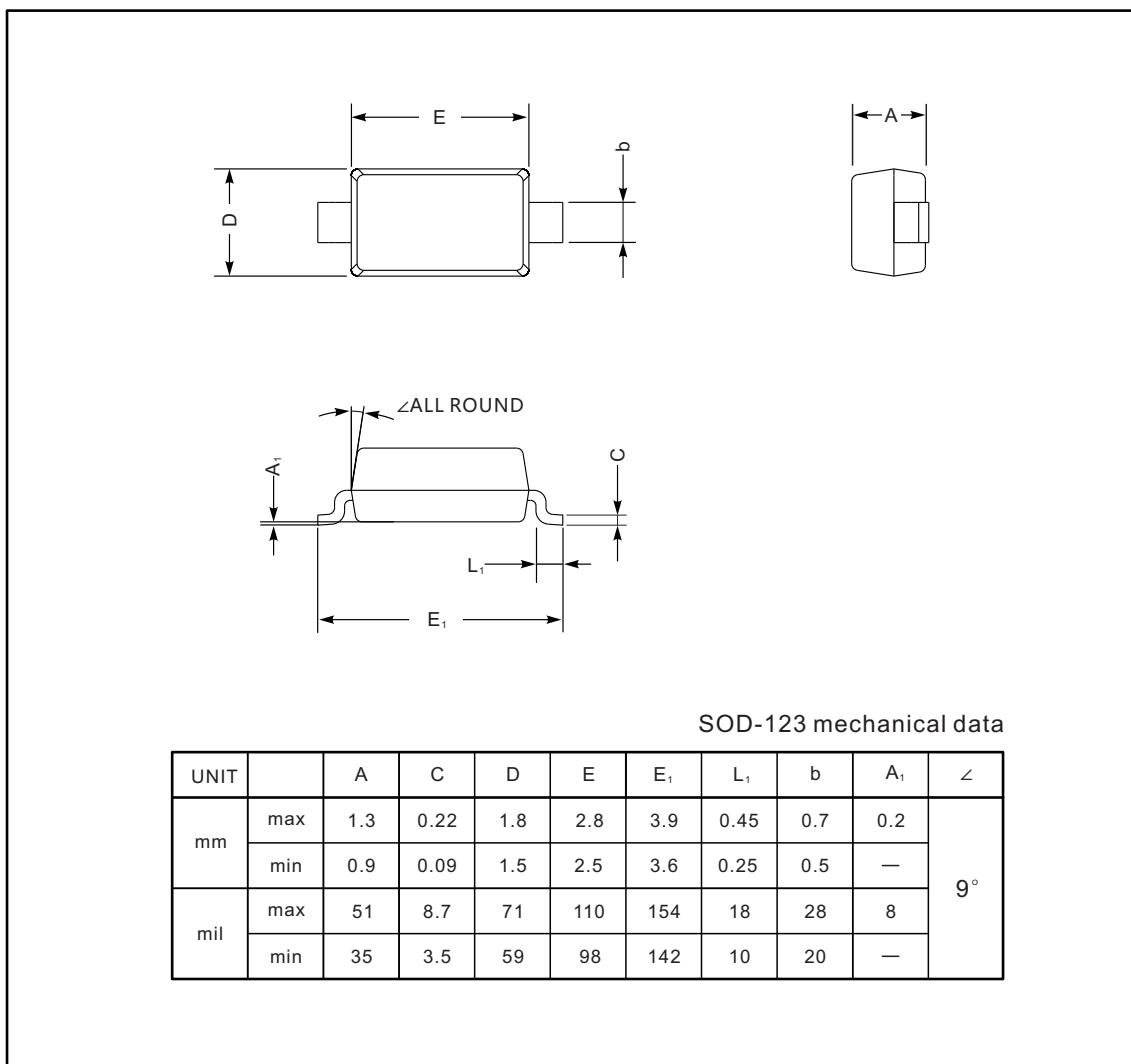

The recommended mounting pad size

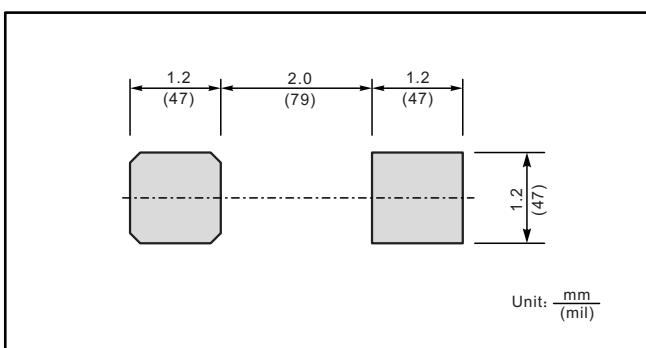

Marking

| Type number | Marking code |
|-------------|--------------|
| SGP1RW | 1R |
| SGP2RW | 2R |
| SGP3RW | 3R |
| SGP4RW | 4R |
| SGP5RW | 5R |
| SGP6RW | 6R |
| SGP7RW | 7R |

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导微\)](#)