



### Surface Mount Schottky Rectifier

Reverse Voltage - 40V

Forward Current - 1.0A

#### FEATURES


- Heatsink structure
- Metal silicon junction, majority carrier conduction
- Super Low VF Schottky barrier diodes
- For surface mounted applications
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

#### MECHANICAL DATA

- Case: SOD-123HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 14mg/0.0005oz

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

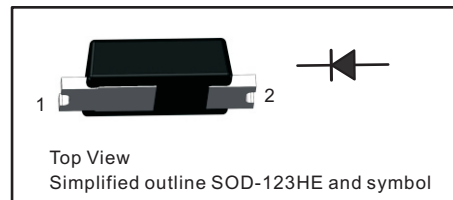

#### Maximum Ratings (TA = 25 °C unless otherwise noted)

Parameter	Symbols	PS14	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	40	V
Maximum RMS voltage	$V_{RMS}$	28	V
Maximum DC blocking voltage	$V_{DC}$	40	V
Maximum average forward rectified current	$I_{F(AV)}$	1.0	A
Peak forward surge current 8.3 ms single half sinewave superimposed on rated load	$I_{FSM}$	15	A
Operating junction temperature range	$T_j$	- 55 to + 125	°C
Storage temperature range	$T_{stg}$	- 55 to + 150	°C

#### Electrical Characteristics (TA = 25 °C unless otherwise noted)

Parameter	Test Conditions	Symbols	PS14	Units
Minimum Breakdown voltage	$T_a = 25^{\circ}C, I_R = 1mA$	$V_{BR}$	40	V
Maximum instantaneous forward voltage	$I_F = 1A, T_a = 25^{\circ}C$	$V_F$	0.60	V
Maximum DC reverse current at rated DC blocking voltage	$T_a = 25^{\circ}C$	$I_R$	50	uA
Typical junction capacitance	4.0 V, 1 MHz	$C_J$	60	pF



Fig.1 Forward Current Derating Curve

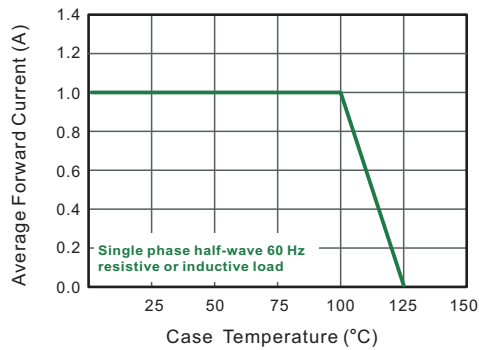


Fig.2 Typical Reverse Characteristics

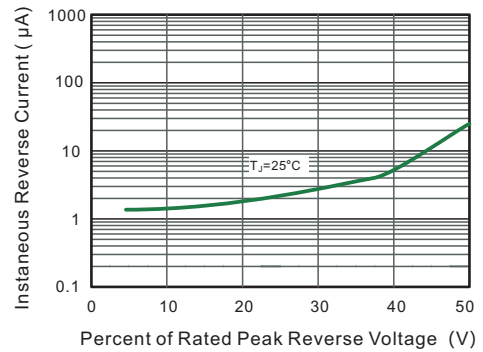


Fig.3 Typical Forward Characteristic

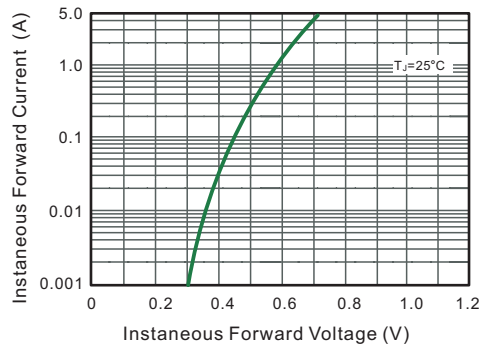


Fig.4 Typical Junction Capacitance


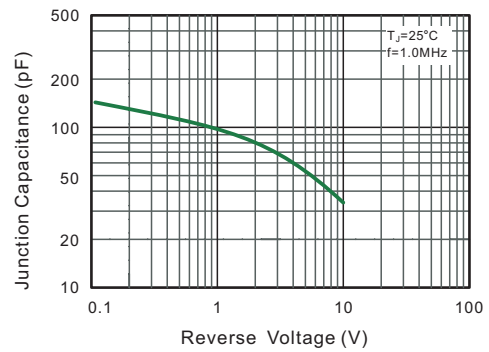


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




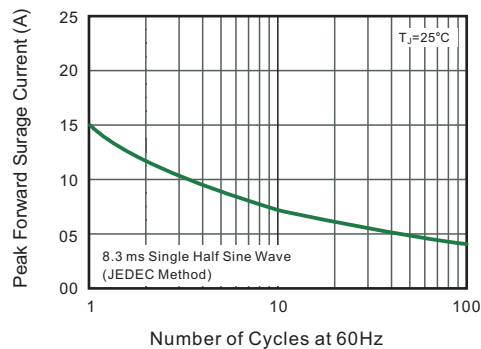


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123HE

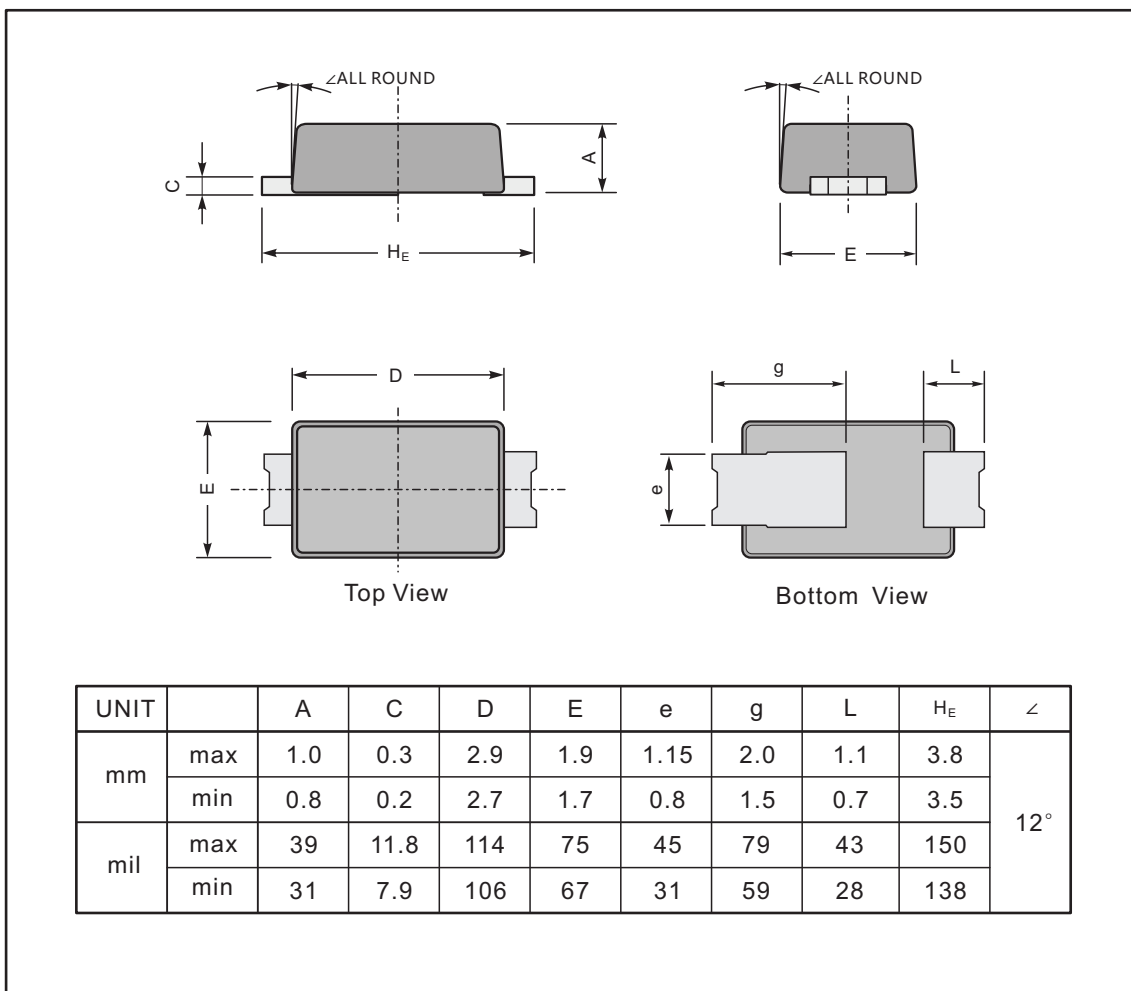

### The recommended mounting pad size

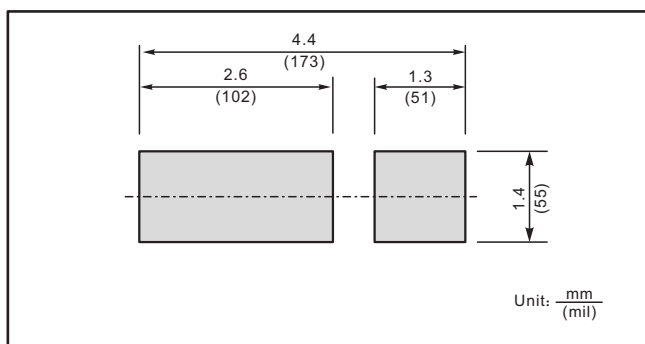

### Marking

Type number	Marking code
PS14	P14



### Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导微\)](#)