



### Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 45 to 100V

Forward Current - 10.0A

#### FEATURES


- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

#### MECHANICAL DATA

- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.22g / 0.0077oz

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

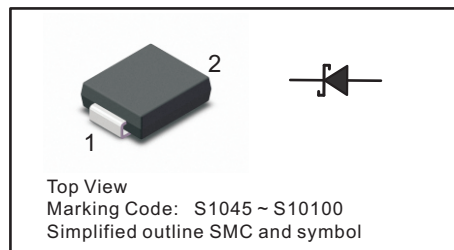

#### Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS1045C	SS1060C	SS10100C	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	45	60	100	V
Maximum RMS voltage	$V_{RMS}$	32	42	70	V
Maximum DC Blocking Voltage	$V_{DC}$	45	60	100	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	10.0			A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	150			A
Max Instantaneous Forward Voltage @10.0 A	$V_F$	0.55	0.75	0.90	V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$	$I_R$	0.5 50			mA
Operating Junction Temperature Range	$T_j$	-55 ~ +125			°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150			°C



Fig.1 Forward Current Derating Curve

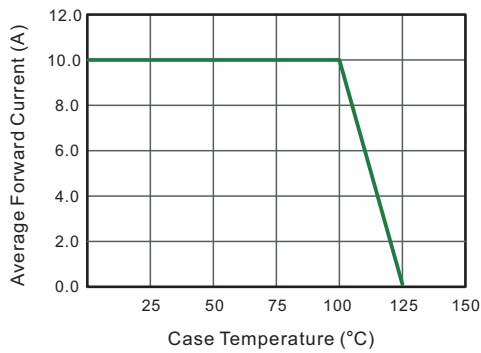


Fig.2 Typical Reverse Characteristics

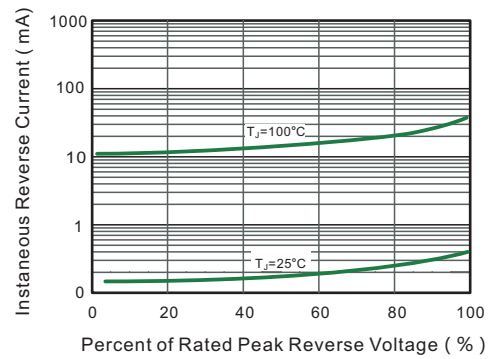


Fig.3 Typical Forward Characteristic


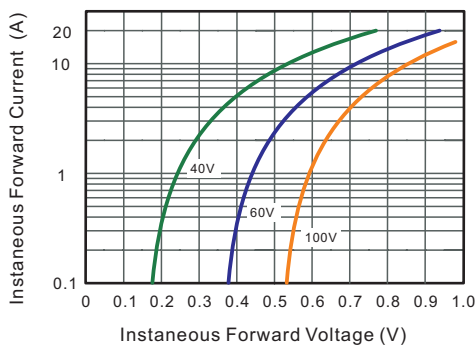


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current




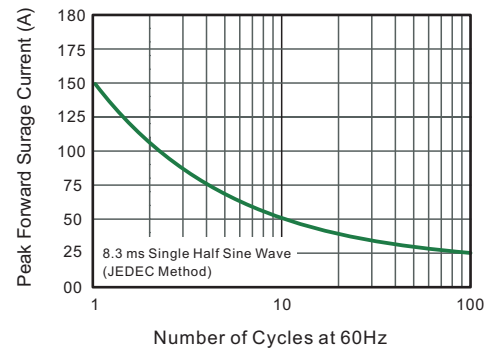


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

SMC

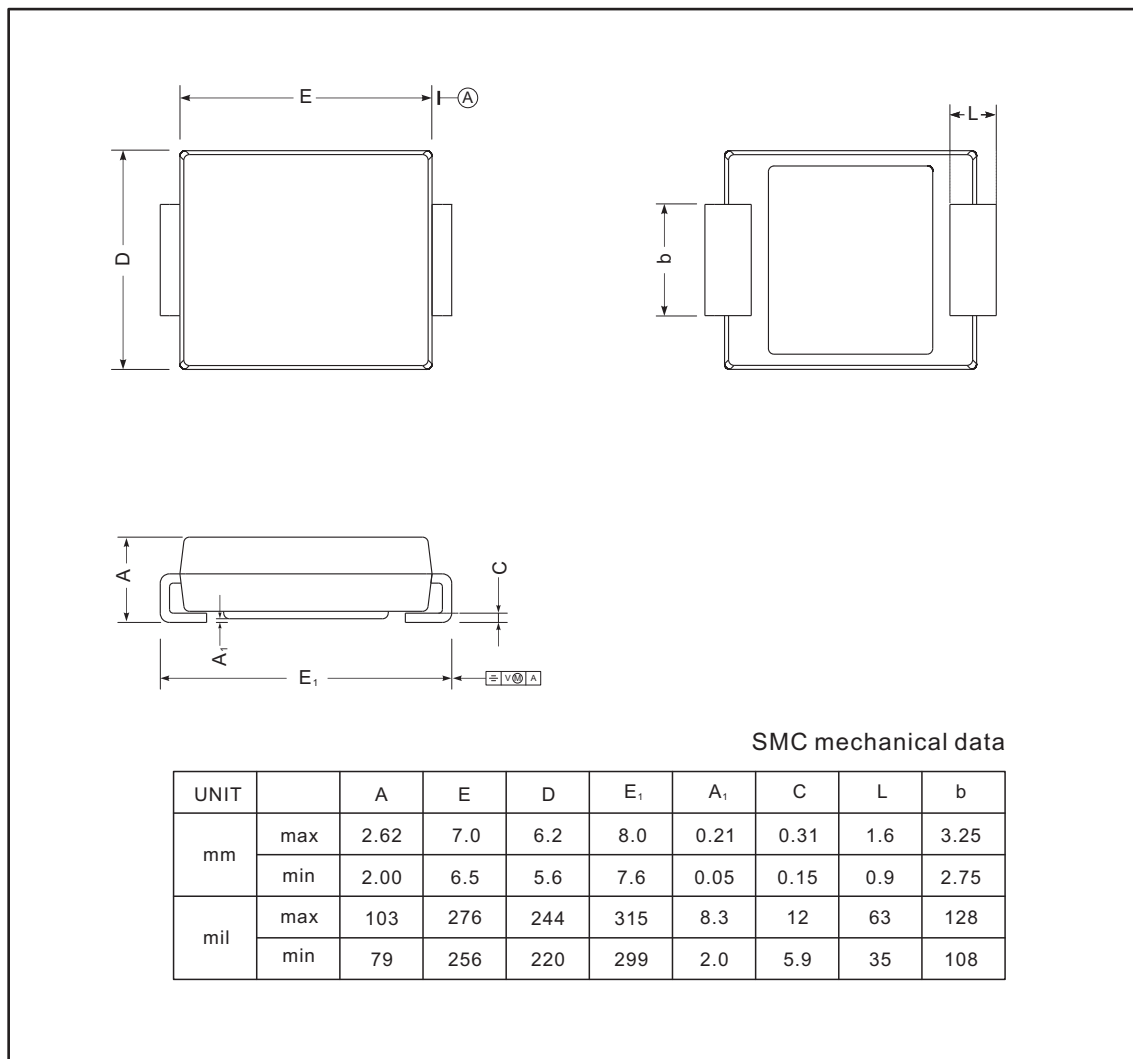

**The recommended mounting pad size**

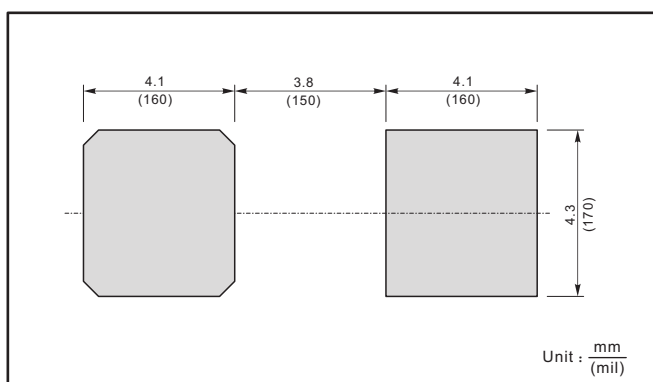

**Marking**

Type number	Marking code
SS1045C	S1045
SS1060C	S1060
SS10100C	S10100

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导微\)](#)