

-60V 40mΩ P-Ch Power MOSFET

Features

- Low Gate Charge
- 100% UIS Tested, 100% R_g Tested
- Pb-free Lead Plating
- Halogen-free and RoHS-compliant


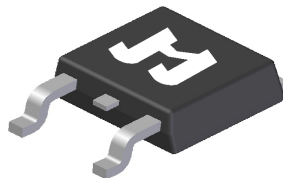
Applications

- LED Back-lighting Application
- DC/DC Power Management
- High Side Switch for Full Bridge Converter

Product Summary

| Parameter | Value | Unit |
|--|-------|------|
| V _{DS} | -60 | V |
| V _{GS(th)_Typ} | -2.0 | V |
| I _D (@ V _{GS} = -10V) ⁽¹⁾ | -23 | A |
| R _{DS(ON)_Typ} (@ V _{GS} = -10V) | 40 | mΩ |
| R _{DS(ON)_Typ} (@ V _{GS} = -4.5V) | 55 | mΩ |

TO-252-3L Top View

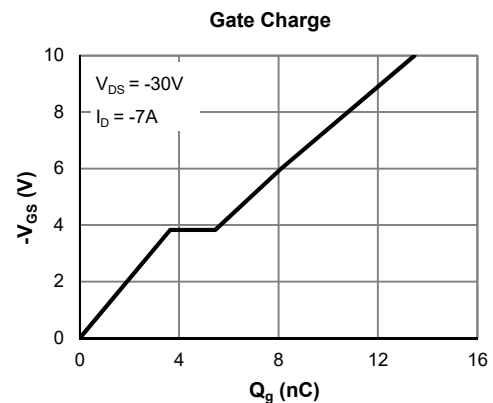
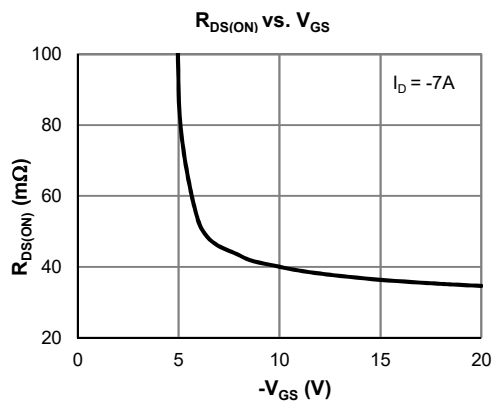


Ordering Information

| Device | Package | # of Pins | Marking | MSL | T _J (°C) | Media | Quantity (pcs) |
|---------------|-----------|-----------|---------|-----|---------------------|--------------|----------------|
| JMPL0648AK-13 | TO-252-3L | 3 | PL0648A | 1 | -55 to 150 | 13-inch Reel | 2500 |

Absolute Maximum Ratings (@ T_A = 25°C unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|------------------------|-------|
| Drain-to-Source Voltage | V _{DS} | -60 | V |
| Gate-to-Source Voltage | V _{GS} | ±20 | V |
| Continuous Drain Current ⁽¹⁾ | I _D | T _C = 25°C | -23 |
| | | T _C = 100°C | -14.8 |
| Pulsed Drain Current ⁽²⁾ | I _{DM} | -59 | A |
| Avalanche Energy ⁽³⁾ | E _{AS} | 75 | mJ |
| Power Dissipation ⁽⁴⁾ | P _D | T _C = 25°C | 44 |
| | | T _C = 100°C | 17.8 |
| Junction & Storage Temperature Range | T _J , T _{STG} | -55 to 150 | °C |



**Electrical Characteristics** (@ $T_J = 25^\circ\text{C}$ unless otherwise specified)

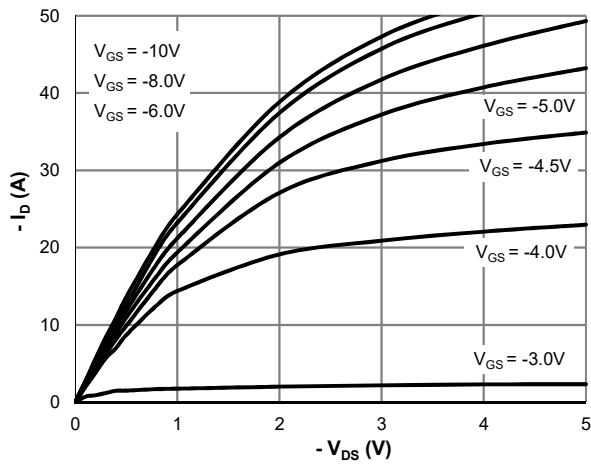
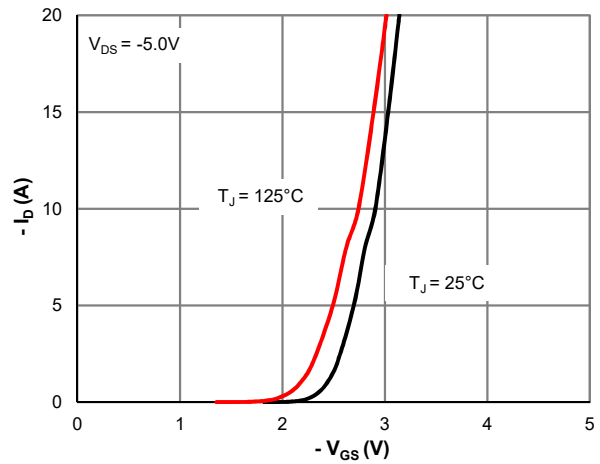
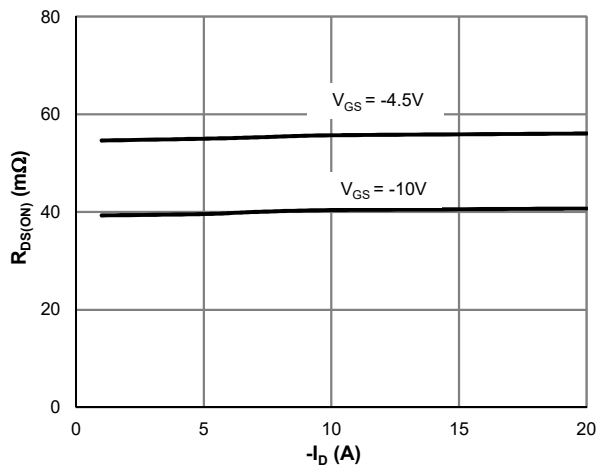
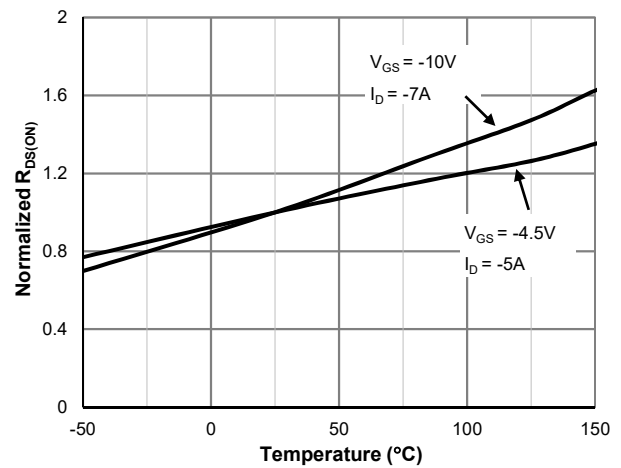
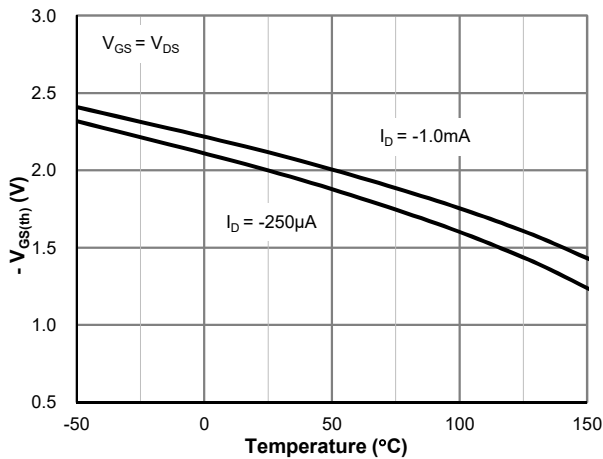
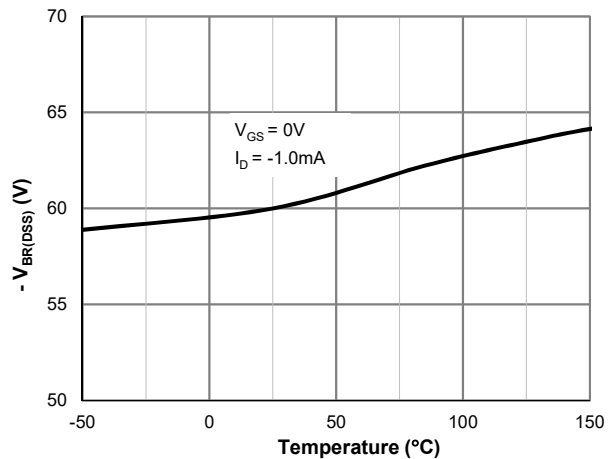
| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|---------------|--|---|-------|--------------|------------------|
| STATIC PARAMETERS | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $I_D = -250\mu\text{A}$, $V_{GS} = 0\text{V}$ | -60 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = -48\text{V}$, $V_{GS} = 0\text{V}$ $T_J = 55^\circ\text{C}$ | | | -1.0 -5.0 | μA |
| Gate-Body Leakage Current | I_{GSS} | $V_{DS} = 0\text{V}$, $V_{GS} = \pm 20\text{V}$ | | | ± 100 | nA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = V_{GS}$, $I_D = -250\mu\text{A}$ | -1.0 | -2.0 | -3.0 | V |
| Static Drain-Source ON-Resistance | $R_{DS(on)}$ | $V_{GS} = -10\text{V}$, $I_D = -7\text{A}$ | | 40 | 50 | $\text{m}\Omega$ |
| | | $V_{GS} = -4.5\text{V}$, $I_D = -5\text{A}$ | | 55 | 72 | $\text{m}\Omega$ |
| Forward Transconductance | g_{FS} | $V_{DS} = -5\text{V}$, $I_D = -7\text{A}$ | | 20 | | S |
| Diode Forward Voltage | V_{SD} | $I_S = -1\text{A}$, $V_{GS} = 0\text{V}$ | | -0.78 | -1.0 | V |
| Diode Continuous Current | I_S | $T_C = 25^\circ\text{C}$ | | | -23 | A |
| DYNAMIC PARAMETERS ⁽⁵⁾ | | | | | | |
| Input Capacitance | C_{iss} | $V_{GS} = 0\text{V}$, $V_{DS} = -30\text{V}$, $f = 1\text{MHz}$ | | 855 | | pF |
| Output Capacitance | C_{oss} | | | 189 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 9.5 | | pF |
| Gate Resistance | R_g | $V_{GS} = 0\text{V}$, $V_{DS} = 0\text{V}$, $f = 1\text{MHz}$ | | 9.2 | | Ω |
| SWITCHING PARAMETERS ⁽⁵⁾ | | | | | | |
| Total Gate Charge (@ $V_{GS} = -10\text{V}$) | Q_g | $V_{GS} = 0$ to -10V $V_{DS} = -30\text{V}$, $I_D = -7\text{A}$ | | 13.5 | | nC |
| Total Gate Charge (@ $V_{GS} = -4.5\text{V}$) | Q_g | | | 6.4 | | nC |
| Gate Source Charge | Q_{gs} | | | 3.6 | | nC |
| Gate Drain Charge | Q_{gd} | | | 1.8 | | nC |
| Turn-On DelayTime | $t_{D(on)}$ | $V_{GS} = -10\text{V}$, $V_{DS} = -30\text{V}$ $R_L = 4.3\Omega$, $R_{GEN} = 3\Omega$ | | 5.4 | | ns |
| Turn-On Rise Time | t_r | | | 1.9 | | ns |
| Turn-Off DelayTime | $t_{D(off)}$ | | | 23 | | ns |
| Turn-Off Fall Time | t_f | | | 4.2 | | ns |
| Body Diode Reverse Recovery Time | t_{rr} | | $I_F = -7\text{A}$, $dI_F/dt = -100\text{A}/\mu\text{s}$ | | 27 | |
| Body Diode Reverse Recovery Charge | Q_{rr} | $I_F = -7\text{A}$, $dI_F/dt = -100\text{A}/\mu\text{s}$ | | 28 | | nC |

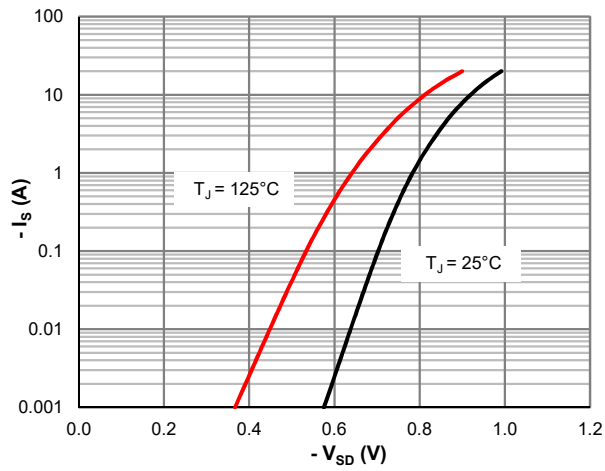
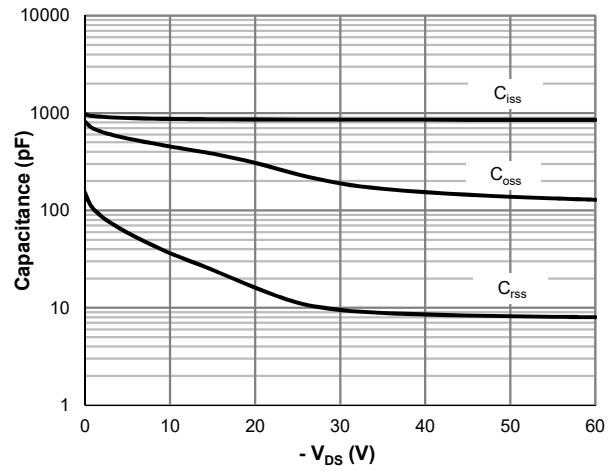
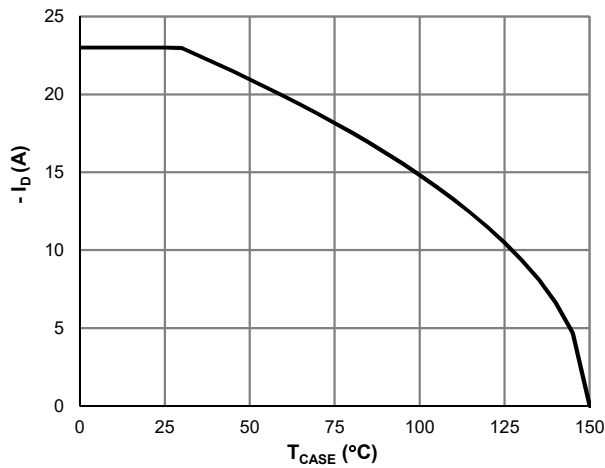
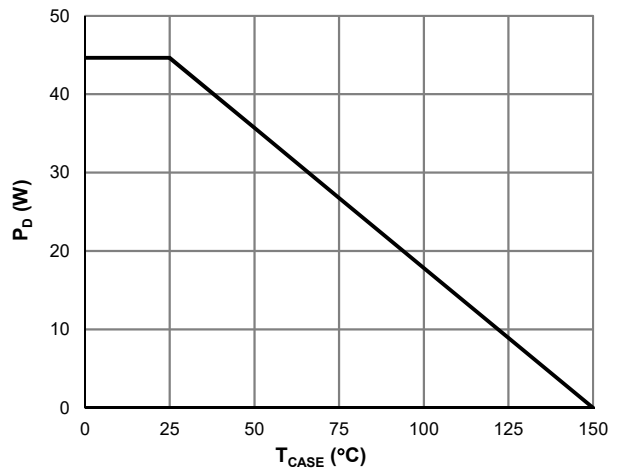
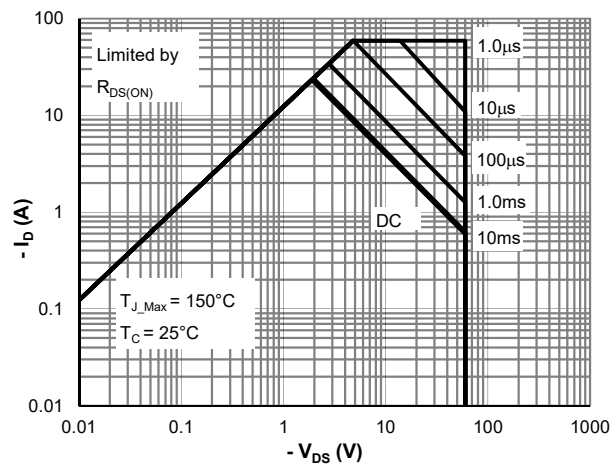
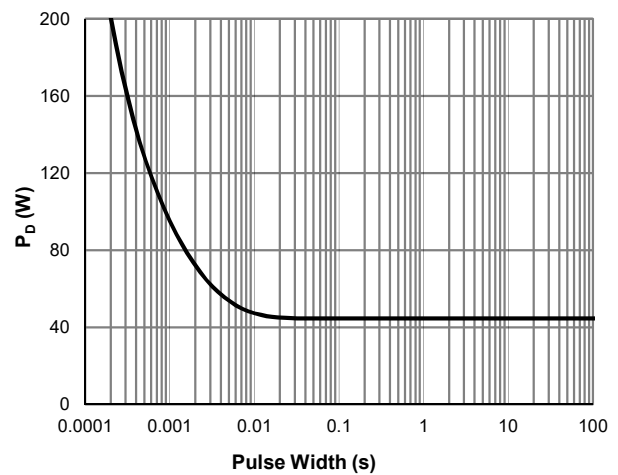
Thermal Performance

| Parameter | Symbol | Typ. | Max. | Unit |
|---|-----------------|------|------|---------------------------|
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 50 | 60 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 2.8 | 3.4 | $^\circ\text{C}/\text{W}$ |

Notes:

1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
2. This single-pulse measurement was taken under $T_{J_Max} = 150^\circ\text{C}$.
3. E_{AS} of 75 mJ is based on starting $T_J = 25^\circ\text{C}$, $L = 3.0\text{mH}$, $I_{AS} = -7.1\text{A}$, $V_{GS} = -10\text{V}$, $V_{DD} = -30\text{V}$; 100% test at $L = 0.1\text{mH}$, $I_{AS} = -25\text{A}$.
 $T_{J_Max} = 150^\circ\text{C}$.
4. The power dissipation P_D is based on $T_{J_Max} = 150^\circ\text{C}$.
5. This value is guaranteed by design hence it is not included in the production test.

Typical Electrical & Thermal Characteristics

Figure 1: Saturation Characteristics

Figure 2: Transfer Characteristics

Figure 3: $R_{DS(ON)}$ vs. Drain Current

Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

Figure 5: $V_{GS(th)}$ vs. Junction Temperature

Figure 6: $V_{BR(DSS)}$ vs. Junction Temperature

Typical Electrical & Thermal Characteristics

Figure 7: Body-Diode Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Current De-rating

Figure 10: Power De-rating

Figure 11: Maximum Safe Operating Area

Figure 12: Single Pulse Power Rating, Junction-to-Case



Typical Electrical & Thermal Characteristics

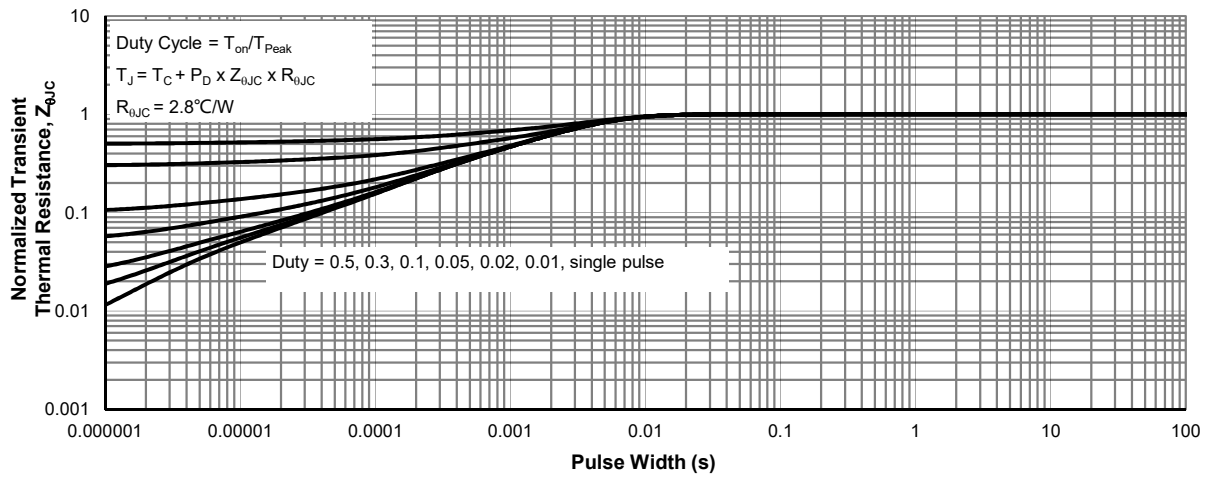
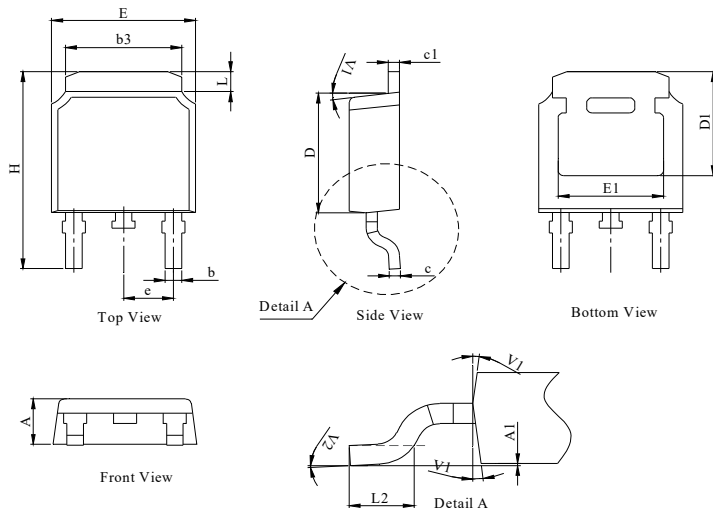
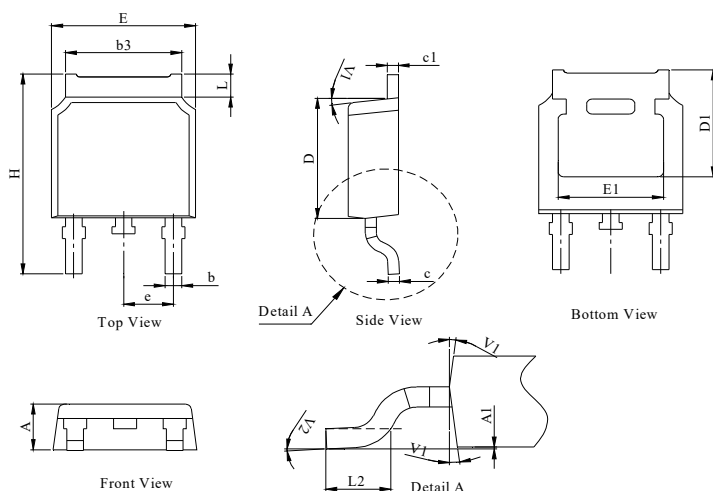



Figure 13: Normalized Maximum Transient Thermal Impedance

TO-252-3L Package Information
Package Outline Type-A


| DIM. | MILLIMETER | | |
|------|------------|-------|-------|
| | MIN. | NOM. | MAX. |
| A | 2.18 | 2.30 | 2.39 |
| A1 | 0 | -- | 0.13 |
| b | 0.64 | 0.76 | 0.89 |
| c | 0.40 | 0.50 | 0.61 |
| c1 | 0.46 | 0.50 | 0.58 |
| D | 5.97 | 6.10 | 6.23 |
| D1 | 5.05 | -- | -- |
| E | 6.35 | 6.60 | 6.73 |
| E1 | 4.32 | -- | -- |
| b3 | 5.21 | 5.38 | 5.55 |
| e | 2.29 BSC | | |
| H | 9.40 | 10.00 | 10.40 |
| L | 0.89 | -- | 1.27 |
| L2 | 1.40 | -- | 1.78 |
| V1 | 7° REF | | |
| V2 | 0° | -- | 6° |

Package Outline Type-B


| DIM. | MILLIMETER | | |
|------|------------|-------|-------|
| | MIN. | NOM. | MAX. |
| A | 2.10 | 2.30 | 2.40 |
| A1 | 0 | -- | 0.13 |
| b | 0.66 | 0.76 | 0.86 |
| b3 | 5.21 | 5.38 | 5.55 |
| c | 0.40 | 0.50 | 0.60 |
| c1 | 0.44 | 0.50 | 0.58 |
| D | 5.90 | 6.10 | 6.30 |
| D1 | 5.30REF | | |
| E | 6.40 | 6.60 | 6.80 |
| E1 | 4.63 | - | - |
| e | 2.29 BSC | | |
| H | 9.50 | 10.00 | 10.70 |
| L | 1.09 | -- | 1.21 |
| L2 | 1.35 | -- | 1.65 |
| V1 | 7° REF | | |
| V2 | 0° | -- | 6° |

Recommended Soldering Footprint


DIMENSIONS:MILLIMETERS

单击下面可查看定价，库存，交付和生命周期等信息

[>>JW\(捷捷微\)](#)