




ABS2~ABS10 GLASS PASSIVATED BRIDGE RECTIFIERS

Rev.4.2

DESCRIPTION:

- ✧ Plastic package has underwriters laboratory flammability classification 94V-0
- ✧ Glass passivated chip junction
- ✧ Lead free in comply with EU RoHS 2011/65/EU directives
- ✧ Ideal for automatic placement
- ✧ High surge forward current capability
- ✧ Lead tin plated copper
- ✧ Reliable low cost construction utilizing molded plastic technique
- ✧ General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballast, adapter, etc.

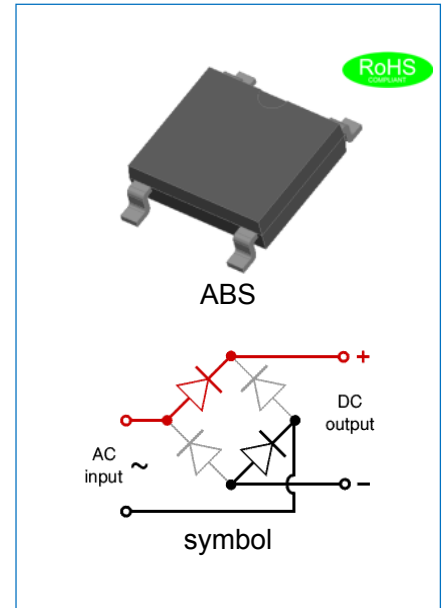

MECHANICAL DATA

- ✧ Case: ABS molded plastic
- ✧ Terminals: Solder plated, solderable per J-STD-002
- ✧ Polarity: Symbol marking on body
- ✧ Weight:0.098gram

ABSOLUTE MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V
Average rectified output current at $T_L=100^\circ\text{C}$	I_o	1.0					A
Peak forward surge current: 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	35					A
Current squared time @ $1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^\circ\text{C}$, Rating of per diode	I^2t	5					$\text{A}^2 \text{s}$
Maximum forward voltage per diode @ $I_F=1.0\text{A}$	V_F	1.1					V
Maximum DC reverse current at rated DC blocking voltage per diode	$T_A=25^\circ\text{C}$	I_R	5				μA
	$T_A=150^\circ\text{C}$		500				μA
Typical junction capacitance $V_R=4.0\text{V}$, $f=1\text{MHz}$	C_J	9					pF


ABS2~ABS10

Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C
--	-----------------------------------	-------------	----

THERMAL RESISTANCES

Symbol	Parameter	ABS2	ABS4	ABS6	ABS8	ABS10	Unit
R _{th(j-c)}	Junction to case	23					°C/W

MARKING

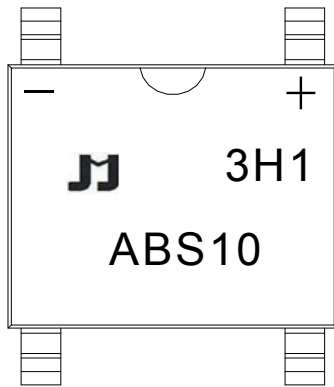

ABS	Package: ABS
10	V _{RRM} :1000V


xH1: Month, 1、2、3 ~ 9、A、B、C

3x1:

2018	2019	2020	2021	2022	2023	2024
H	I	J	K	L	M	N
2025	2026	2027	2028	2029	2030	...
O	P	Q	R	S	T	...

3Hx: Batch number


PACKAGE MECHANICAL DATA

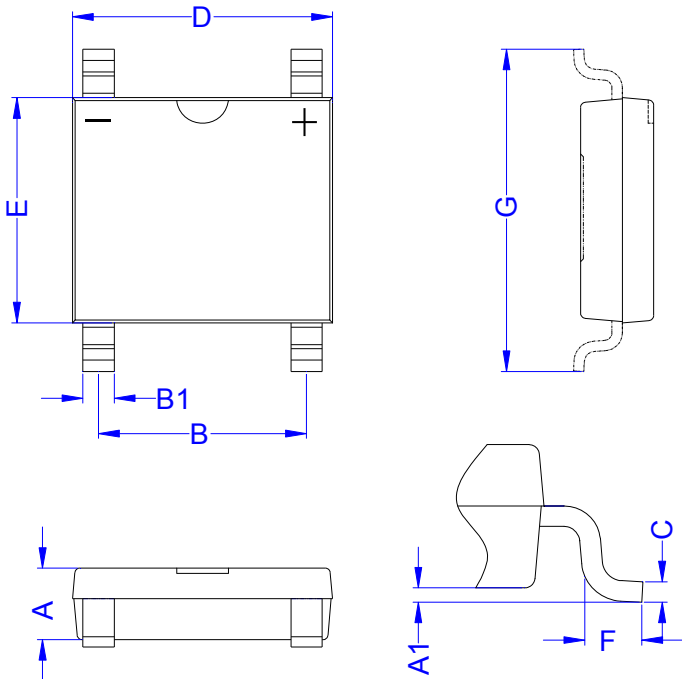

ABS

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.30	1.50	0.051	0.059
A1		0.20		0.008
B	3.90	4.10	0.154	0.161
B1	0.50	0.80	0.020	0.031
C	0.15	0.35	0.006	0.014
D	4.90	5.10	0.193	0.201
E	4.30	4.50	0.169	0.177
F	0.30	0.80	0.012	0.031
G	6.20	6.80	0.244	0.268

TAPE AND REEL SPECIFICATION-ABS

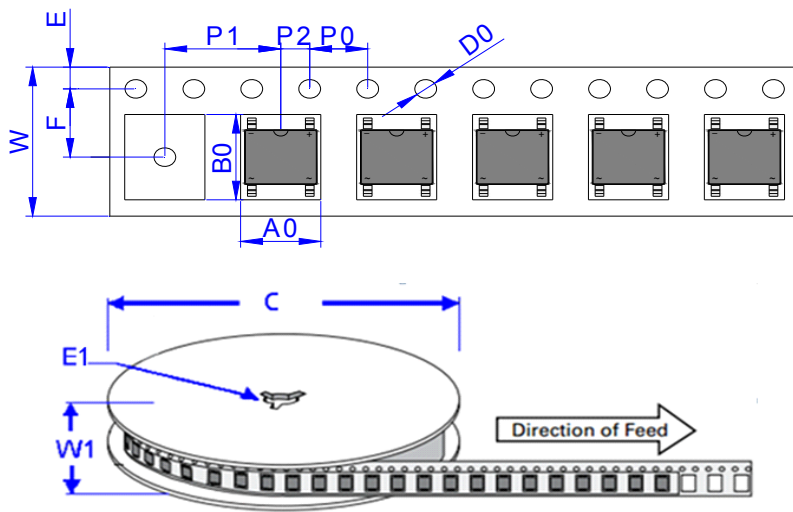


Ref.	Dimensions	
	Millimeters	Inches
A0	5.31± 0.30	0.209 ± 0.012
B0	6.68 ± 0.30	0.263± 0.012
C	330.0	13.0
D0	1.55 ± 0.10	0.061± 0.004
E	1.75 ± 0.20	0.069 ± 0.008
E1	13.3± 0.3	0.524 ± 0.012
F	5.50 ± 0.20	0.217 ± 0.008
P0	4.00 ± 0.20	0.157 ± 0.008
P1	8.00 ± 0.20	0.315± 0.008
P2	2.00 ± 0.20	0.079 ± 0.008
W	12.00± 0.20	0.472 ± 0.008
W1	15.7± 2.0	0.618 ± 0.079

PACKAGE INFORMATION-ABS

OUTLINE	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)
TAPING	0.098	3,000	48,000

CHARACTERISTICS CURVE

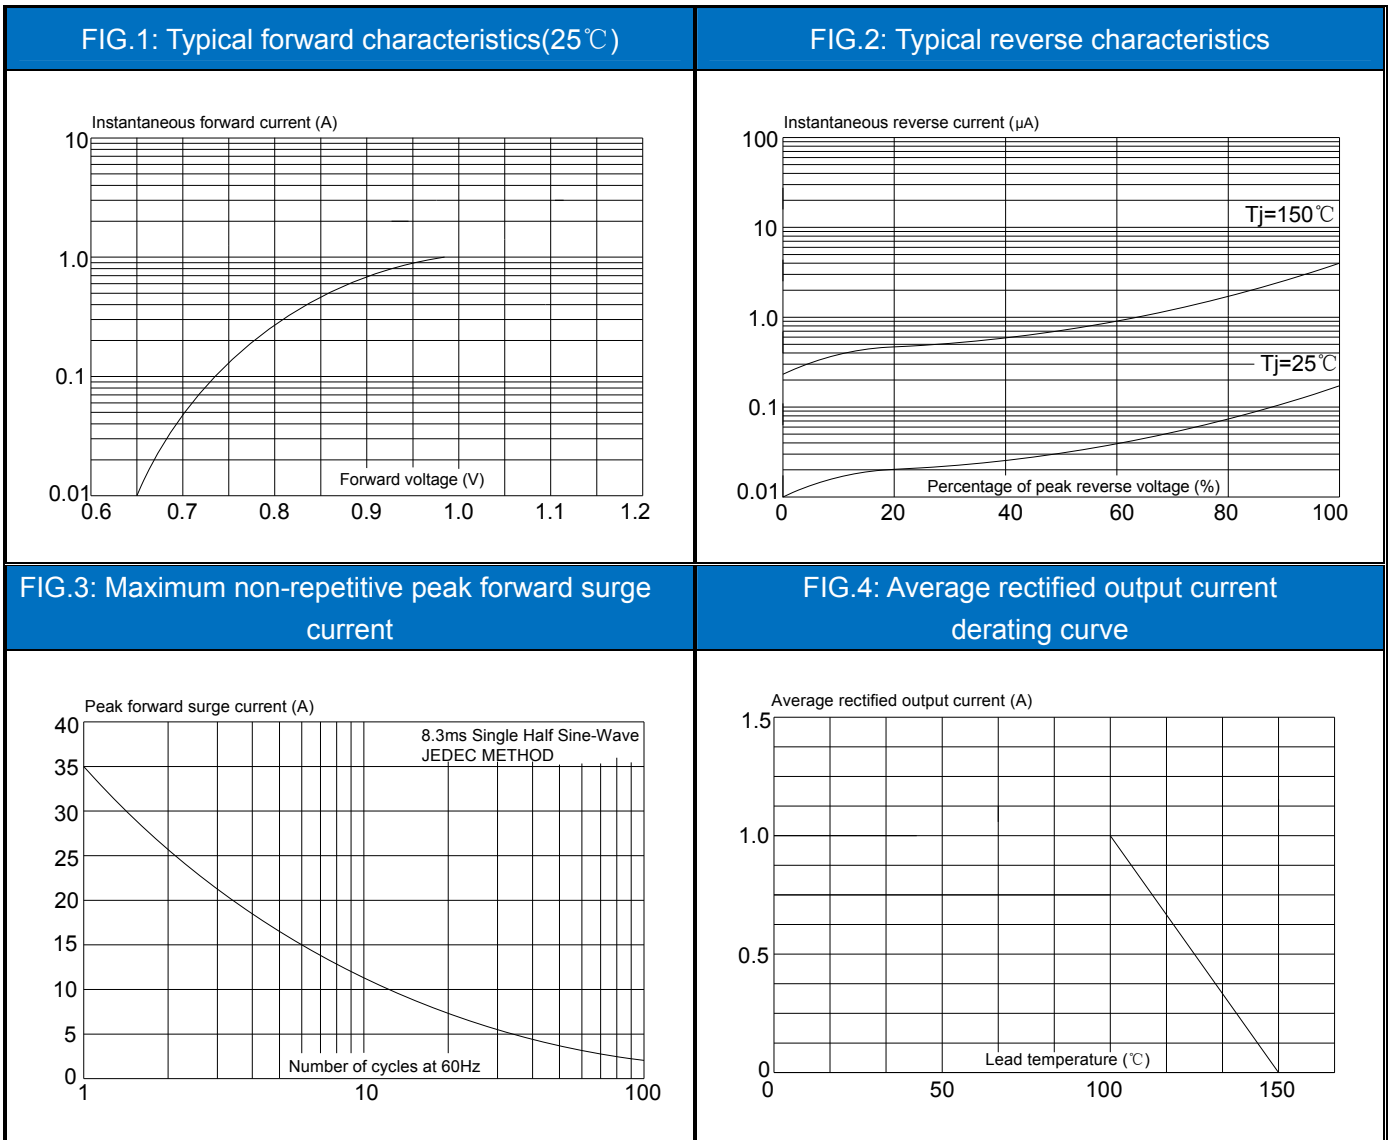


Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 4.2nd version which is made in 27-Oct.-2020. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>JW\(捷捷微\)](#)