



BAV21WS SURFACE MOUNT SWITCHING DIODE


Rev.1.1

FEATURES

- ✧ Fast Switching Speed
- ✧ Surface Mount Package Ideally Suited for Automatic Insertion
- ✧ For Surface Mounted Applications
- ✧ General Purpose Diodes
- ✧ RoHS Compliant/ Green EMC

MECHANICAL DATA

- ✧ Case: SOD-323, Plastic
- ✧ Matte Tin(Sn) Lead Finish
- ✧ Polarity: Cathode Band
- ✧ Weight: 0.01 grams(approx.)
- ✧ Quantity Per Reel:3,000pcs
- ✧ Type Code: T3

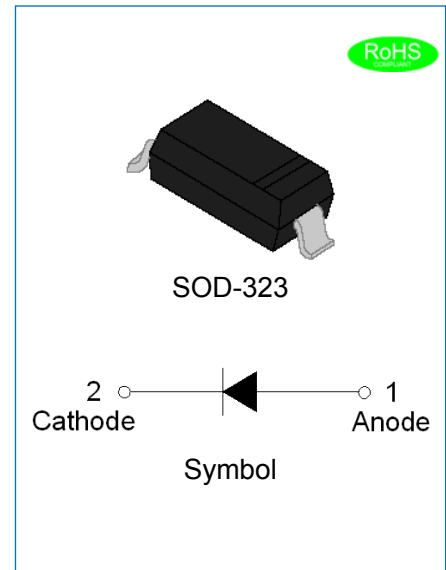

MAXIMUM RATING


(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	BAV21WS	Unit
Continuous Reverse Voltage	V_R	200	V
Peak Repetitive Reverse Voltage	V_{RM}	250	V
Peak Forward Current at $T_A=25^\circ\text{C}$	I_{FM}	400	mA
Average Rectified Output Current	I_O	200	mA
Non-Repetitive Forward Surge Current	$t_P=1\mu\text{s}$	9	A
	$t_P=1\text{s}$	0.5	
Power Dissipation at $T_A=25^\circ\text{C}$	P_D	250	mW
Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	500	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_j	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS(Rating at 25°C ambient temperature unless otherwise specified.)

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
V _F	Forward Voltage	I _F =100mA	-	-	1.0	V
		I _F =200mA	-	-	1.25	V
I _R	Reverse Current	V _R =200V, T _j =25°C	-	-	0.1	μA
		V _R =200V, T _j =100°C	-	-	15	μA
C _T	Capacitance	V _R =0V, f=1MHz	-	1.5	-	pF
T _{rr}	Reverse Recovery Time	I _F =I _R =30mA I _{RR} =0.1*I _R , R _L =100Ω	-	-	50	ns


PACKAGE MECHANICAL DATA

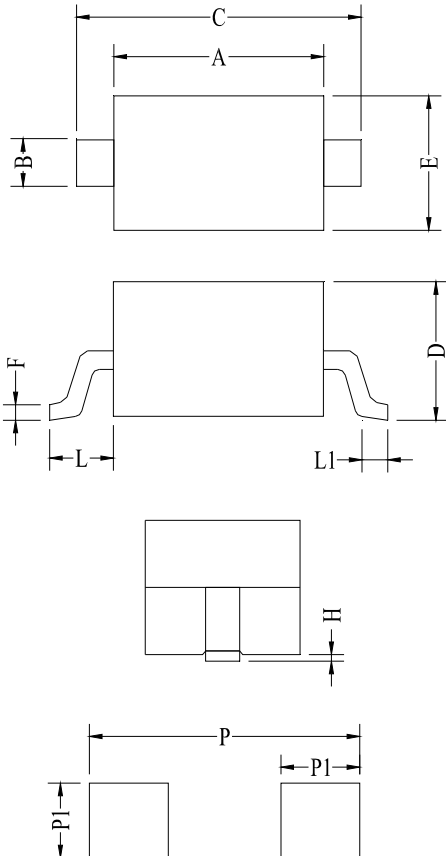

Land Pattern

Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	1.60	1.70	1.80	0.063	0.067	0.071
B	0.25	0.32	0.40	0.010	0.013	0.016
C	2.30	2.60	2.80	0.091	0.102	0.110
D	0.80	0.95	1.10	0.031	0.037	0.043
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.08	0.13	0.18	0.003	0.005	0.007
L	0.475REF			0.019REF		
L1	0.25	0.33	0.40	0.010	0.013	0.016
H	0.00	0.06	0.14	0.000	0.002	0.006
P	3.00			0.118		
P1	0.80			0.031		

TAPE AND REEL INFORMATION-SOD-323

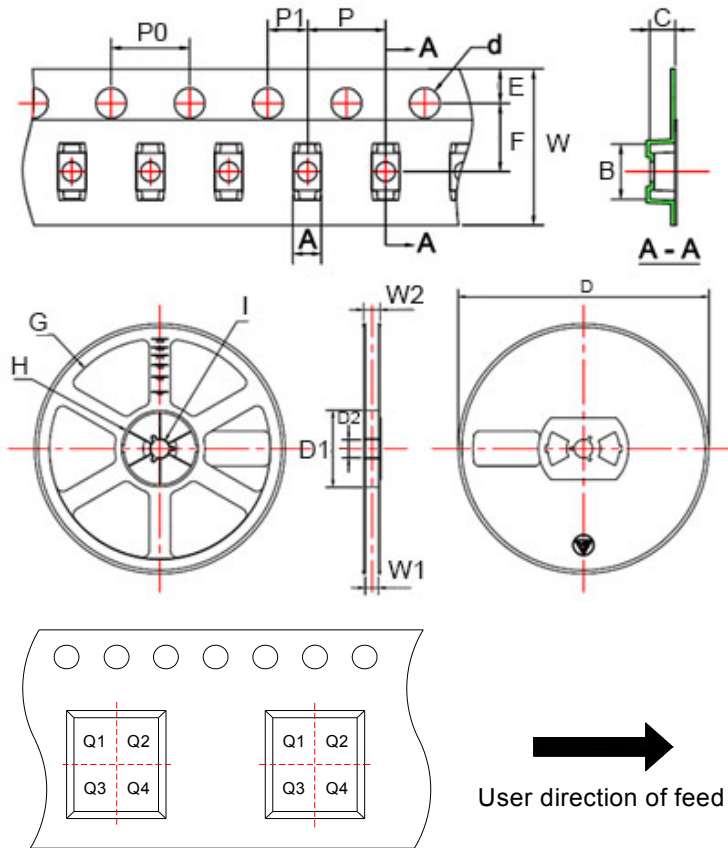

Pin 1 quadrant:Q1&Q2

Packaging description:


SOD-323 parts are shipped in tape. The carrier tape is made from a dissipative(carbon filled) polycarbonate resin. The cover tape is a multilayer film(heat activated adhesive in nature)primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. The reels are blue in color and made of recyclable plastic.

Symbol	Millimeters	Inches
	Typ	Typ
A	1.46	0.057
B	2.90	0.114
C	1.25	0.049
d	∅1.50	∅0.059
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	4.00	0.157
P1	2.00	0.079
W	8.00	0.315
D	∅178.0	∅7.008
D1	54.40	2.142
D2	13.00	0.512
G	R78.0	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484


ORDERING INFORMATION

OUTLINE	PACKAGE TYPE	QUANTITY REEL	DESCRIPTION
TAPING	SOD-323	3,000	7 inch reel pack

MARKING CODE

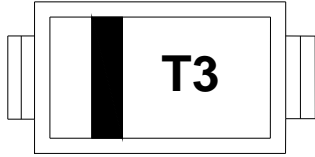Part Number	Marking Code
BAV21WS	

CHARACTERISTICS CURVE

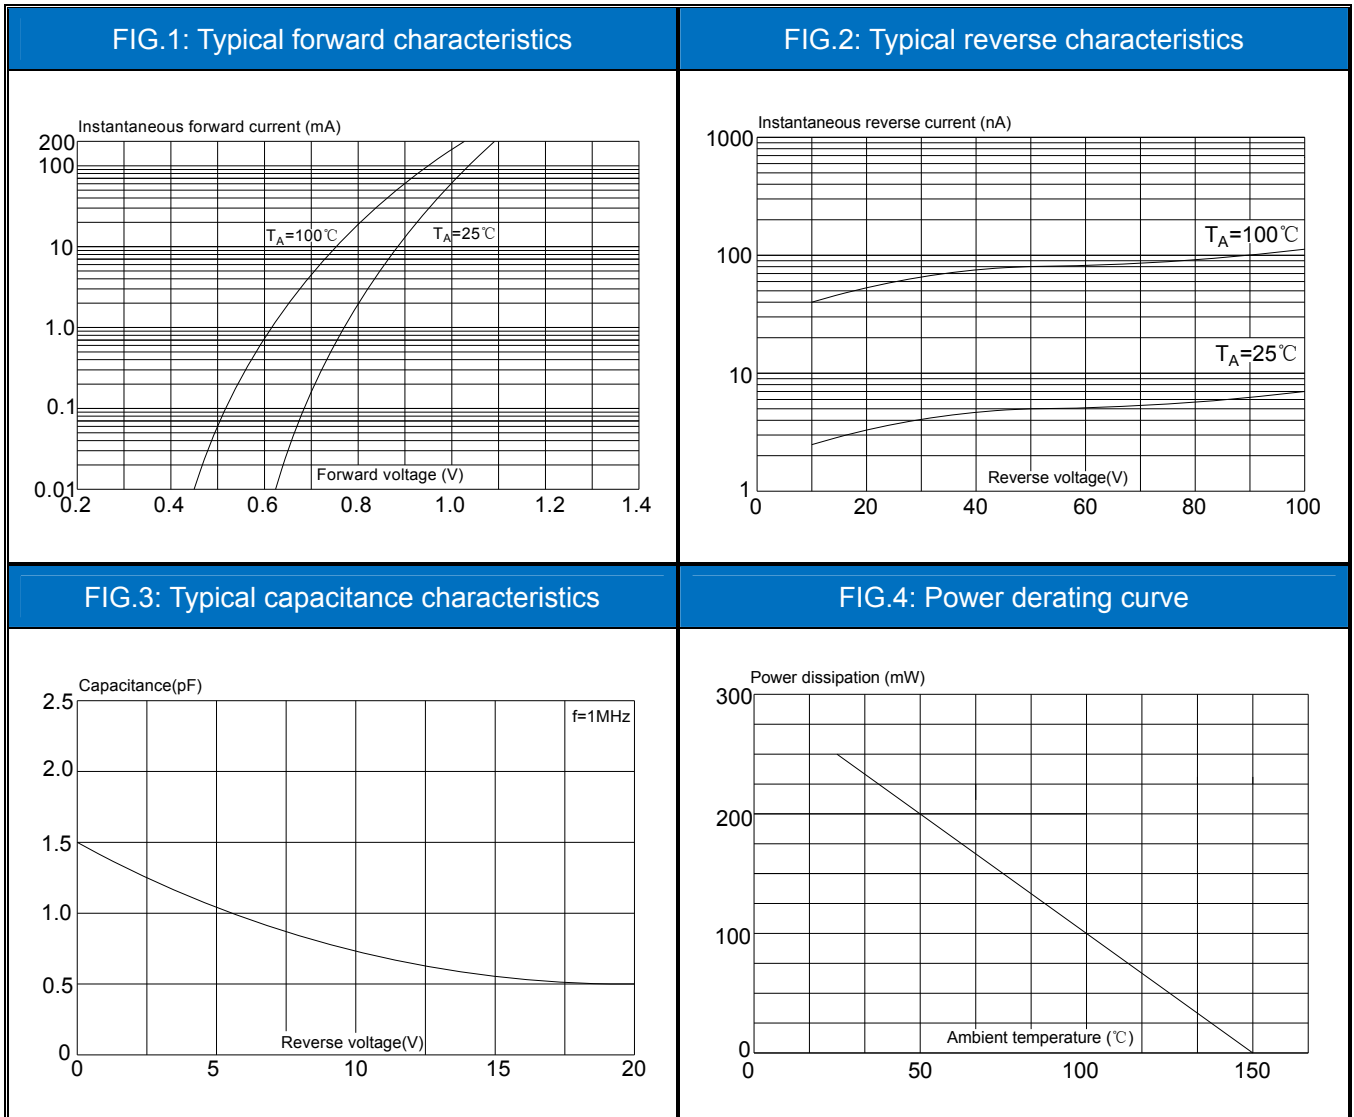


Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.1st version which is made in 17-Dec.-2020. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>JW\(捷捷微\)](#)