




JSTV10L100A

10A Schottky Barrier Rectifier

Rev.1.1

DESCRIPTION

- ✧ Plastic package has underwriters laboratories flammability classification 94V-0
- ✧ Lead free in compliance with EU RoHS 2011/65/EU directive
- ✧ Trench MOS Schottky barrier diode
- ✧ Low forward voltage drop
- ✧ High temperature soldering guaranteed: 260°C/10 seconds
- ✧ Halogen-free according to IEC 61249-2-21 definition

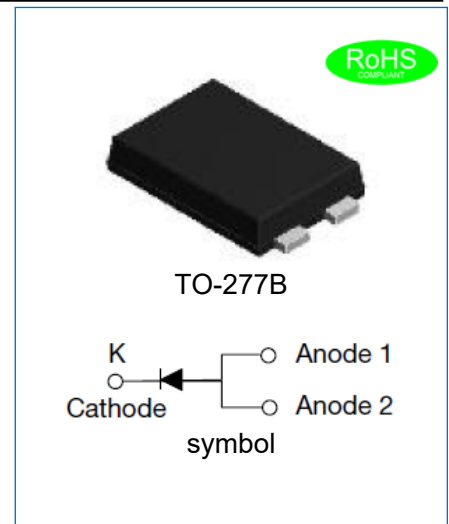

MECHANICAL DATA

- ✧ Case: TO-277B molded plastic
- ✧ Terminals: Solder plated, solderable per J-STD-002

ABSOLUTE MAXIMUM RATING

(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	JSTV10L100A	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum RMS voltage	V_{RMS}	70	V
Maximum DC blocking voltage	V_{DC}	100	V
Maximum average forward current	$I_{F(AV)}$	10	A
Peak forward surge current: 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	170	A
Operating junction temperature range	T_j	-55 to +150	°C
Storage temperature range	T_{stg}	-55 to +150	°C

ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	Min	Typ	Max	Unit	
Forward voltage	$I_F=10A$		$T_A=25^\circ C$	0.68	0.75	V
			$T_A=125^\circ C$	0.61	0.65	
Reverse voltage leakage current	$V_R=100V$		$T_A=25^\circ C$	15	50	μA
			$T_A=125^\circ C$	20	60	mA
Junction capacitance	$V_R=4.0V, f=1MHz$		800		pF	



THERMAL RESISTANCES

Symbol	Parameter	JSTV10L100A	Unit
$R_{th(j-a)}$	Thermal resistance from junction to ambient	35	°C/W

MARKING




JS	Jiejie Schottky
T	Trench

V	Package: TO-277B
10	$I_{F(AV)}=10A$
L	Low forward voltage
100	$V_{RRM}:100V$
A	Version A



PACKAGE MECHANICAL DATA

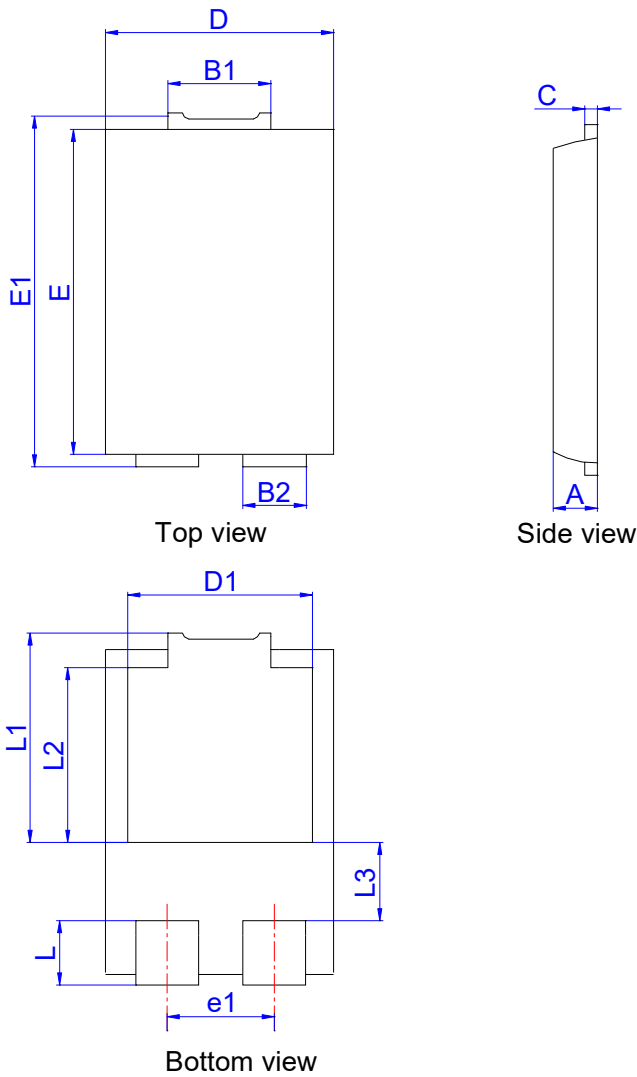

TO-277B


Symbol	Millimeters		Inches	
	Min	Max	Min	Max
E1	6.40	6.60	0.252	0.260
E	5.60	5.80	0.220	0.228
D	4.10	4.30	0.161	0.169
B1	1.70	1.90	0.067	0.075
B2	0.80	1.00	0.031	0.039
A	1.05	1.20	0.041	0.047
C	0.30	0.40	0.012	0.016
L	0.85	1.10	0.033	0.043
L1	4.20	4.40	0.165	0.173
L2	3.52Typ.		0.139Typ.	
L3	1.10	1.40	0.043	0.055
D1	3.00	3.30	0.118	0.130
e1	1.86Typ.		0.073Typ.	

PACKAGE INFORMATION-TO-277B

PART No.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
JSTV10L100A	5,000	80,000	13 inch reel pack



CHARACTERISTICS CURVE

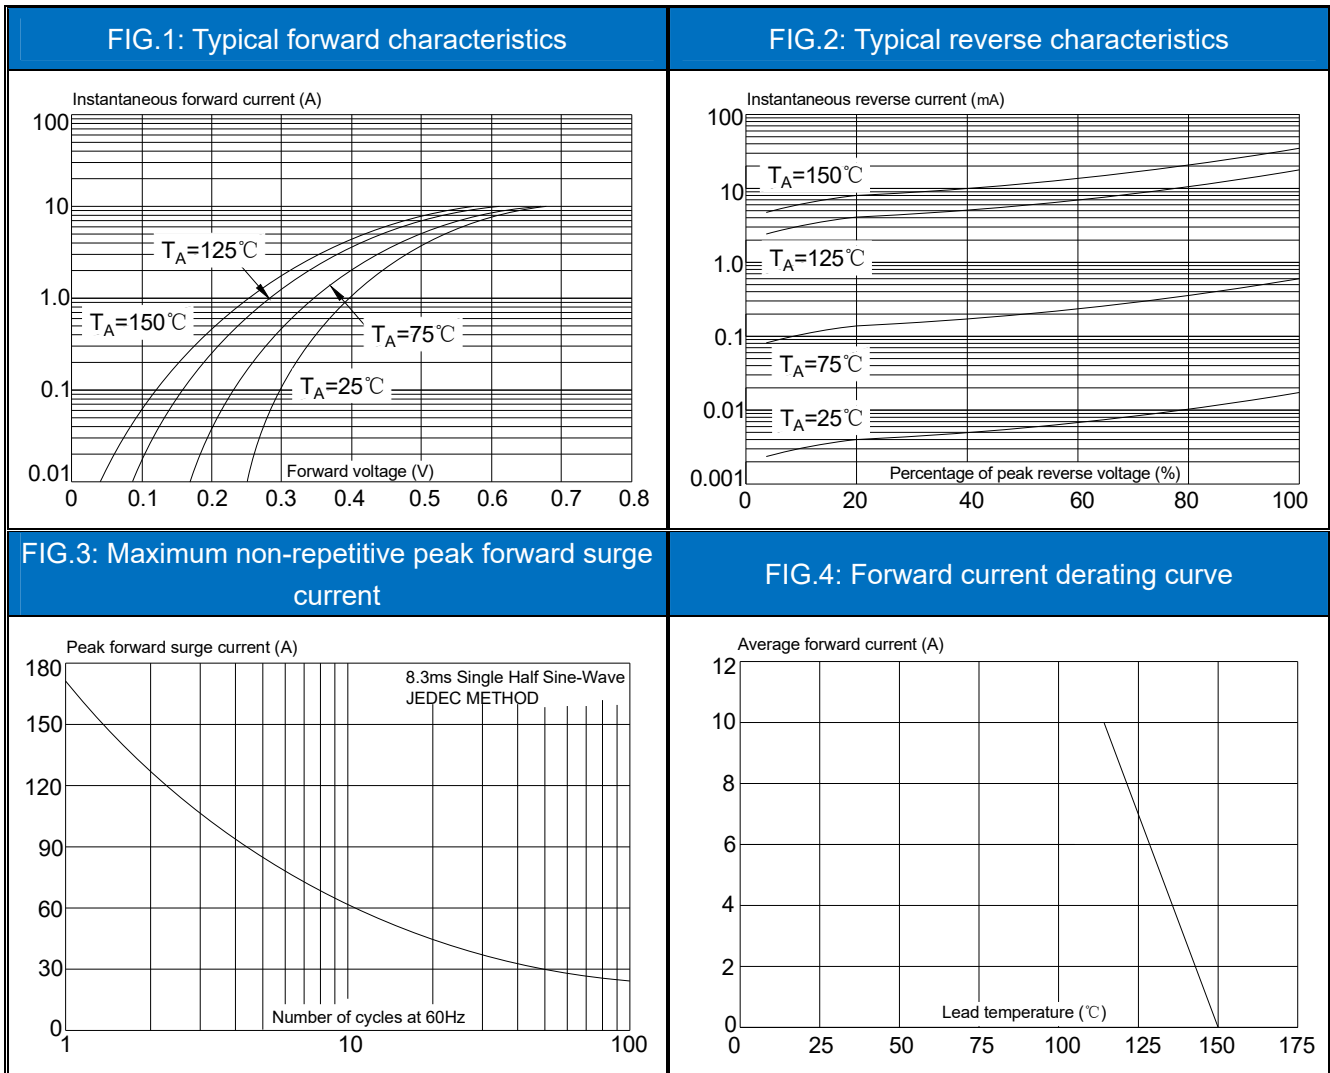




JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.1st version which is made in 25-Mar.-2022. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2022 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>JW\(捷捷微\)](#)