
JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

SOT-23 Plastic-Encapsulate MOSFETS

2N7002 MOSFET (N-Channel)

$V_{(BR)DSS}$	$R_{DS(on)}$MAX	I_D
60 V	5Ω@10V	115mA
	7Ω@5V	

SOT-23



1. GATE
2. SOURCE
3. DRAIN


FEATURE

- High density cell design for low $R_{DS(ON)}$
- Voltage controlled small signal switch
- Rugged and reliable
- High saturation current capability


APPLICATION

- Load Switch for Portable Devices
- DC/DC Converter

MARKING



Equivalent Circuit



MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current	I_D	0.115	A
Power Dissipation	P_D	0.225	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	556	℃/W
Junction Temperature	T_J	150	℃
Storage Temperature	T_{stg}	-50 ~+150	

Downloaded From Oneyac.com

MOSFET ELECTRICAL CHARACTERISTICS

T_a=25℃ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS}=0 V, I_D=250 μA	60			V
Gate-Threshold Voltage	$V_{th(GS)}$	V_{DS}=V_{GS}, I_D=250 μA	1	1.6	2.5	
Gate-body Leakage	I_{GSS}	V_{DS}=0 V, V_{GS}=±20 V			±80	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60 V, V_{GS}=0 V			80	nA
On-state Drain Current	$I_{D(ON)}$	V_{GS}=10 V, V_{DS}=7 V	500			mA
Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=10 V, I_D=500mA		0.9	5	Ω
		V_{GS}=5 V, I_D=50mA		1.1	7	
Forward Trans conductance	g_{fs}	V_{DS}=10 V, I_D=200mA	80			ms
Drain-source on-voltage	$V_{DS(on)}$	V_{GS}=10V, I_D=500mA			3.75	V
		V_{GS}=5V, I_D=50mA			0.375	V
Diode Forward Voltage	V_{SD}	I_S=115mA, V_{GS}=0 V	0.55		1.2	V
Input Capacitance *	C_{iss}	V_{DS}=25V, V_{GS}=0V, f=1MHz			50	pF
Output Capacitance *	C_{oss}				25	
Reverse Transfer Capacitance *	C_{rss}				5	

SWITCHING TIME


Turn-on Time *	$t_{d(on)}$	V_{DD}=25 V, R_L=50Ω, I_D=500mA,V_{GEN}=10 V R_G=25Ω			20	ns
Turn-off Time *	$t_{d(off)}$				40	

*These parameters have no way to verify.


Downloaded From Oneyac.com

Typical Characteristics


Output Characteristics

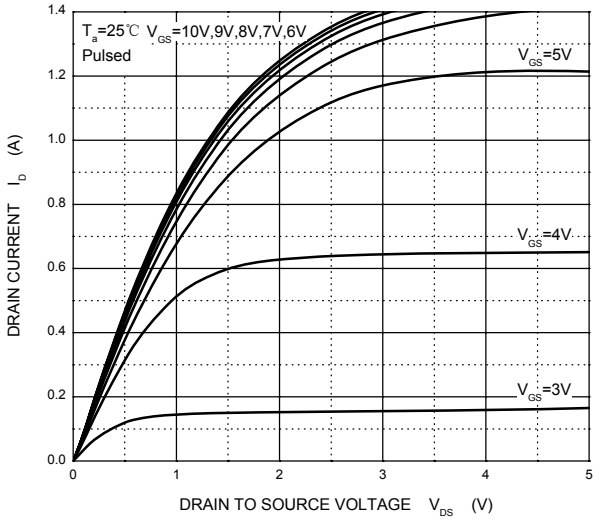


Transfer Characteristics

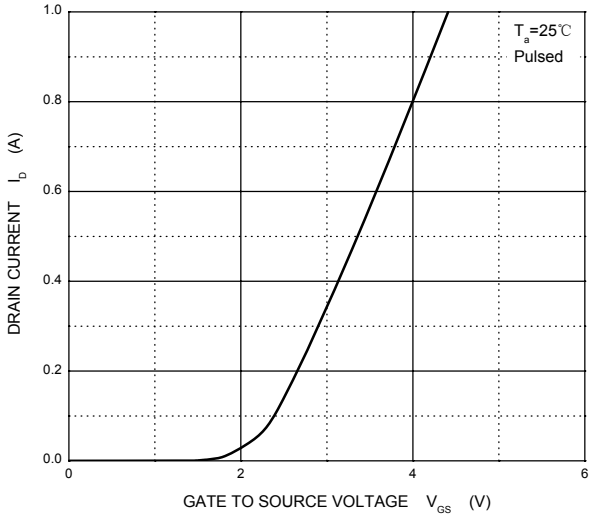


$R_{DS(ON)}$ — I_D

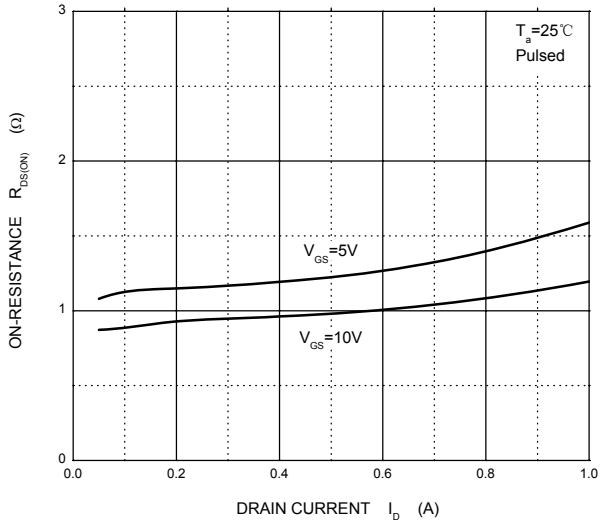

$R_{DS(ON)}$ — V_{GS}

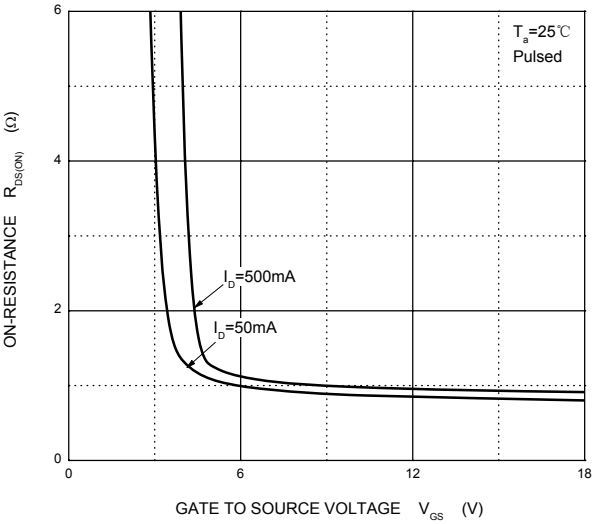



I_S — V_{SD}

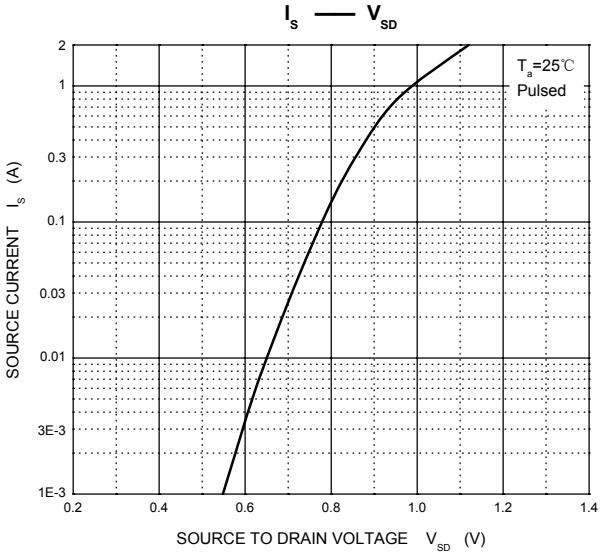


Downloaded From Oneyac.com

SOT-23 Package Outline Dimensions








Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.


NOTICE


JCET reserve the right to make modifications,enhancements, improvements, corrections or other changes without further notice to any product herein.JCET does not assume any liability arising out of the application or use of any product described herein.

Downloaded From Oneyac.com

SOT-23 Tape and reel

SOT-23 Embossed Carrier Tape

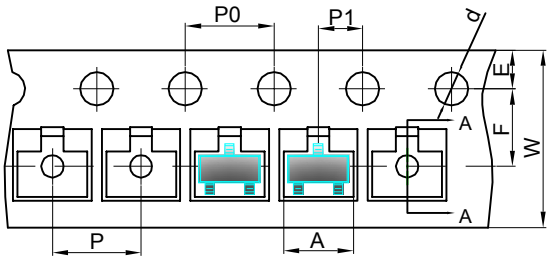




Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

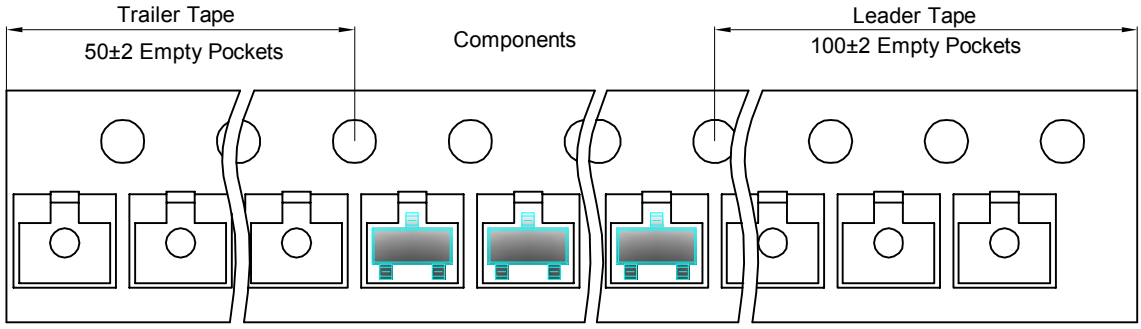

SOT-23 Reel

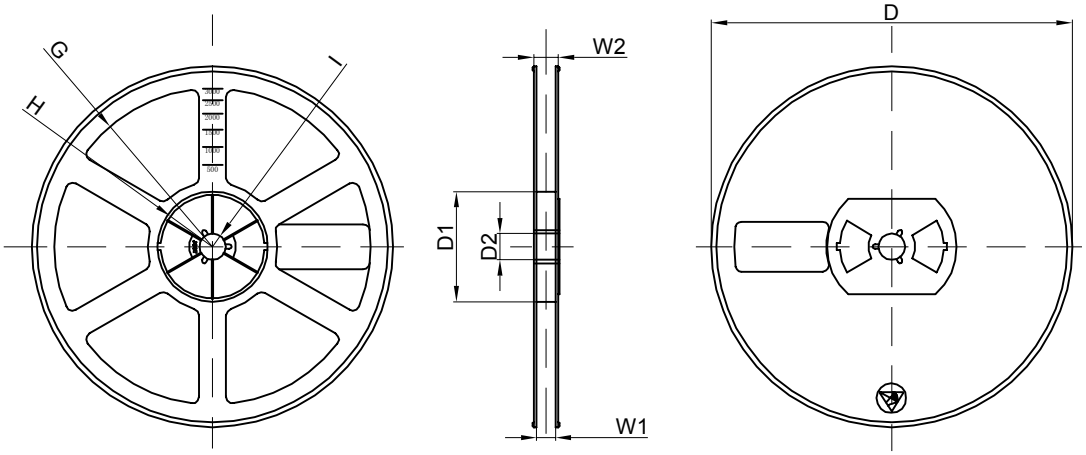

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>JSCJ(长晶科技)

Downloaded From Oneyac.com