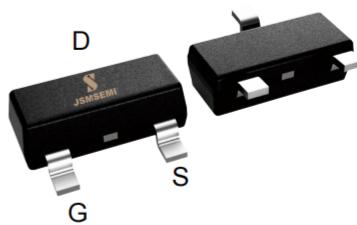


■ DESCRIPTION

The QM2415K is the P-Channel logic enhancement mode power field effect transistor is produced using high cell density advanced trench technology..

This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application, and low in-line power loss are needed in a very small outline surface mount package.

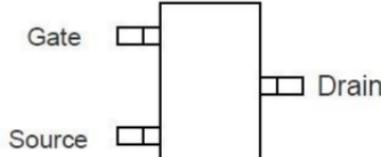
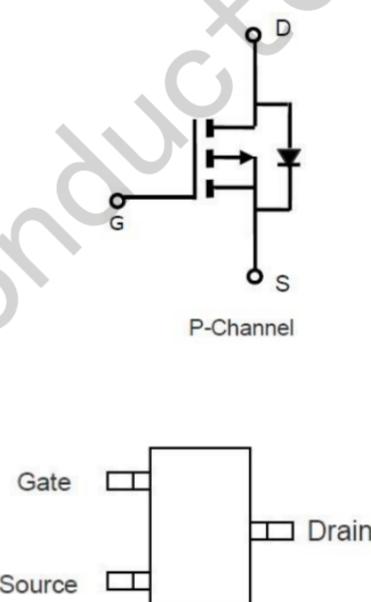


■ FEATURE

- ◆ -20V/-4.3A, $R_{DS(ON)}=30m\Omega$ (typ.)@ $V_{GS}=-4.5V$
- ◆ -20V/-3.5A, $R_{DS(ON)}=40m\Omega$ (typ.)@ $V_{GS}=-2.5V$
- ◆ -20V/-2.0A, $R_{DS(ON)}=56m\Omega$ (typ.)@ $V_{GS}=-1.8V$
- ◆ -20V/-1.0A, $R_{DS(ON)}=85m\Omega$ (typ.)@ $V_{GS}=-1.5V$
- ◆ Super high design for extremely low $R_{DS(ON)}$
- ◆ Exceptional on-resistance and Maximum DC current capability
- ◆ Full RoHS compliance
- ◆ SOT23-3 package design

■ APPLICATIONS

- ◆ Power Management
- ◆ Portable Equipment
- ◆ DC/DC Converter
- ◆ Load Switch
- ◆ DSC
- ◆ LCD Display inverter


 TOP VIEW
 SOT-23

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless otherwise noted)

Symbol	Parameter	Typical	Unit	
V_{DSS}	Drain-Source Voltage	-20	V	
V_{GSS}	Gate-Source Voltage	± 10	V	
I_D	Continuous Drain Current ($T_c=25^\circ C$)	$V_{GS}=-10V$	-4.2	A
	Continuous Drain Current ($T_c=70^\circ C$)		-3.5	A
I_{DM}	Pulsed Drain Current	-20	A	
P_D	Power Dissipation	$T_A=25^\circ C$	1.5	W
		$T_A=70^\circ C$	0.9	
T_J	Operation Junction Temperature	150	$^\circ C$	
T_{STG}	Storage Temperature Range	-55~+150	$^\circ C$	
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	120	$^\circ C/W$	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

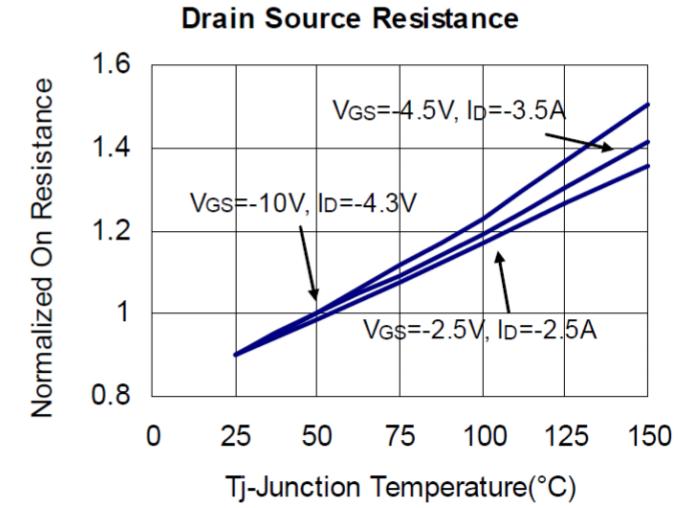
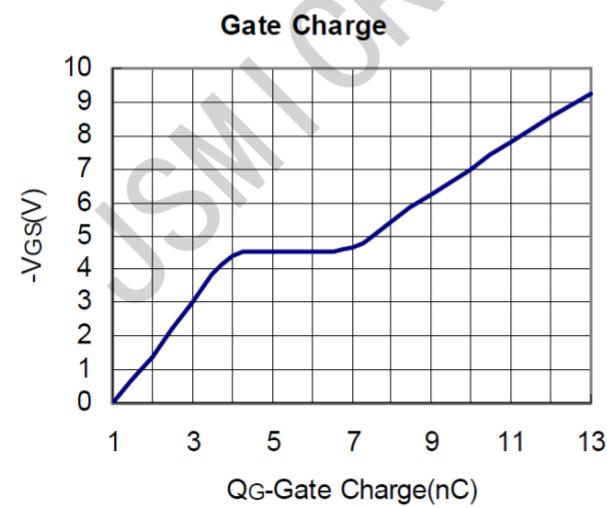
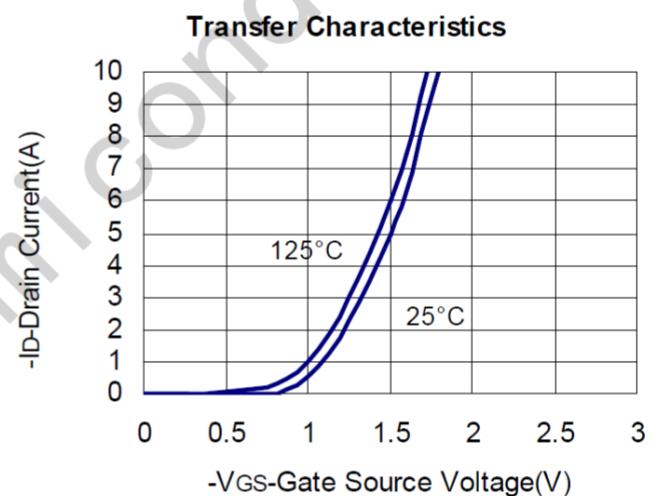
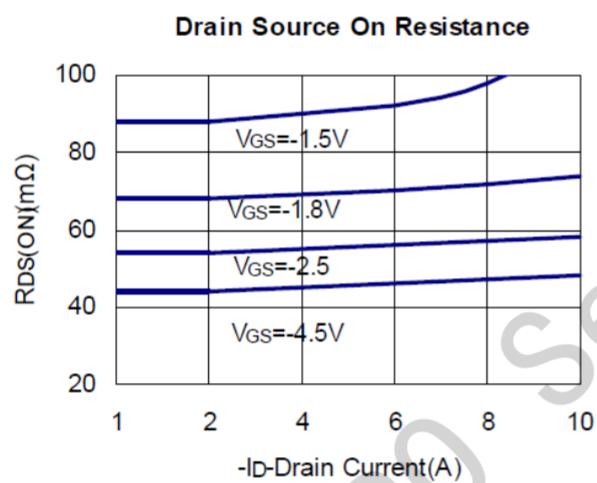
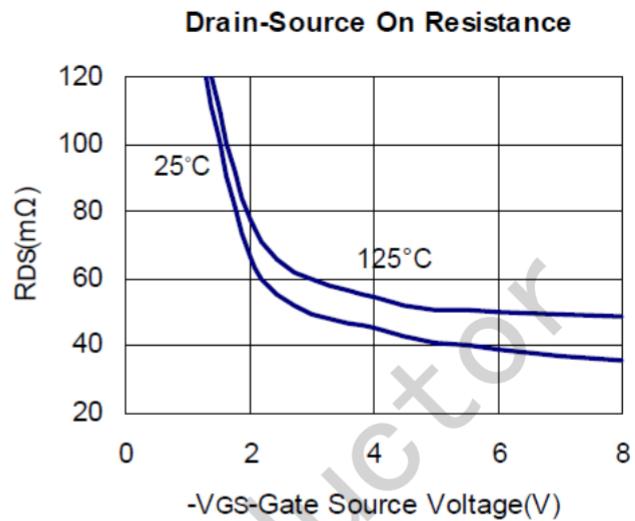
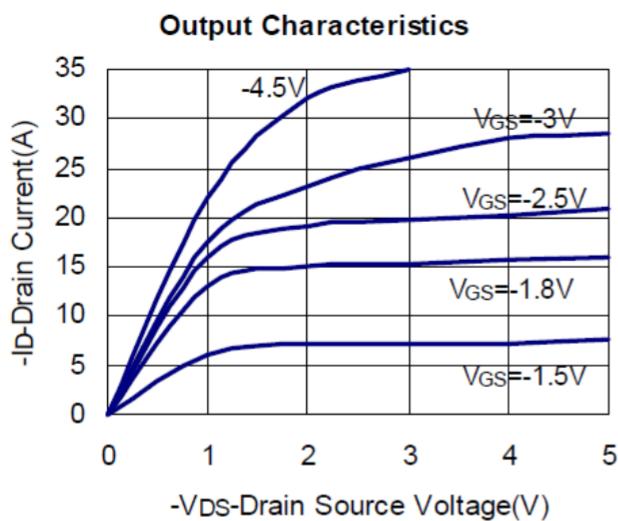
Absolute maximum ratings are stress rating only and functional device operation is not implied

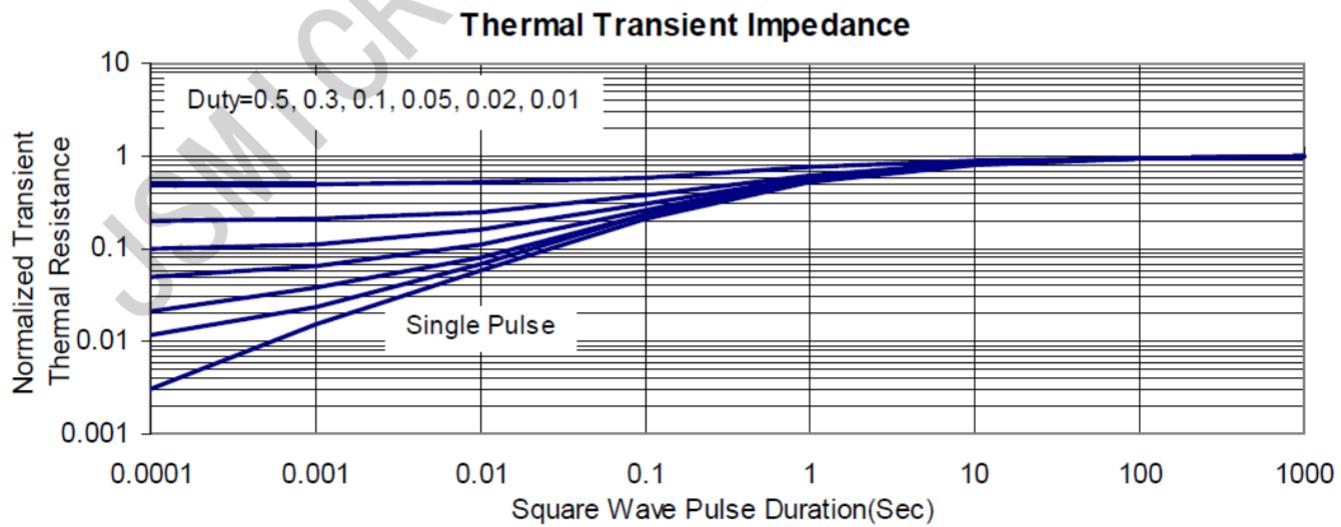
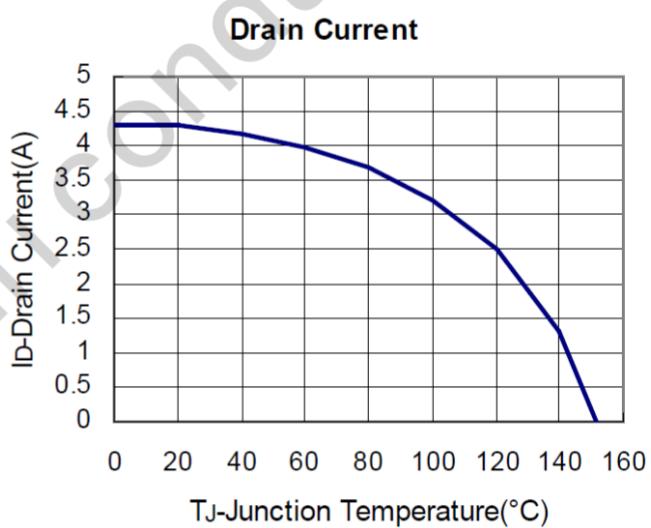
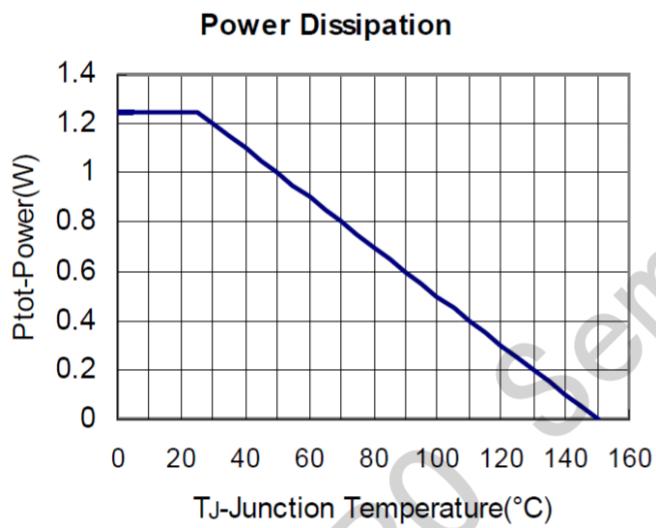
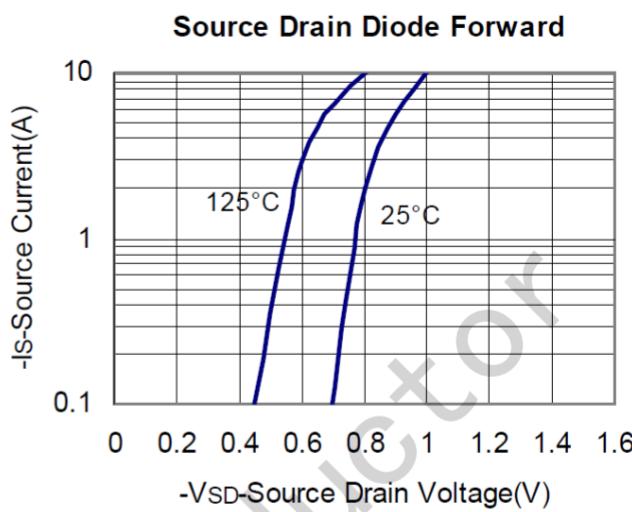
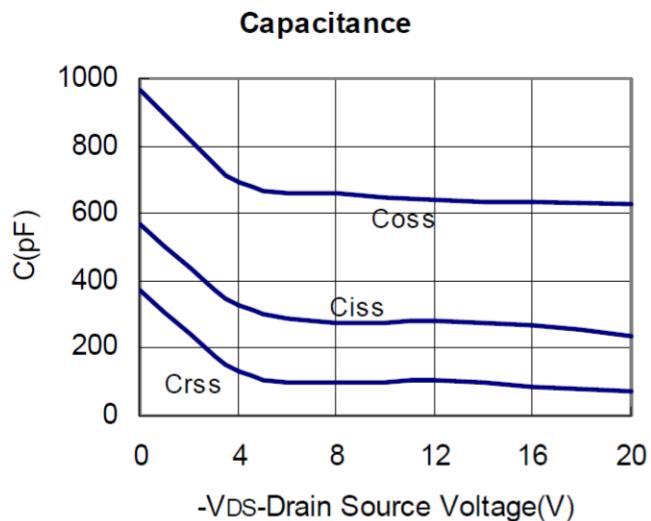
■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^\circ C$ Unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit	
Static Parameters							
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-20			V	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.3		-1.0	V	
I_{GSS}	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 10V$			± 100	nA	
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-20V, V_{GS}=0$			-1	uA	
		$V_{DS}=-20V, V_{GS}=0$ $T_J=55^\circ C$			-5		
$R_{DS(ON)}$	Drain-Source On-Resistance	$V_{GS}=-4.5V, I_D=-4.0A$		30	40	mΩ	
		$V_{GS}=-2.5V, I_D=-4.0A$		40	60		
		$V_{GS}=-1.8V, I_D=-2.0A$		56	78		
		$V_{GS}=-1.5V, I_D=-1.0A$		85	110		
G_{fs}	Forward Transconductance	$V_{DS}=-5V, I_D=-4.0A$		22		S	
Source-Drain Diode							
V_{SD}	Diode Forward Voltage	$I_S=-1.0A, V_{GS}=0V$		-0.67	-1.2	V	
Dynamic Parameters							
Q_g	Total Gate Charge	$V_{DS}=-10V$ $V_{GS}=-4.5V$ $I_D=-4.0A$		11.1		nC	
Q_{gs}	Gate-Source Charge			3.1			
Q_{gd}	Gate-Drain Charge			2.4			
C_{iss}	Input Capacitance	$V_{DS}=-10V$ $V_{GS}=0V$ $f=1MHz$		989		pF	
C_{oss}	Output Capacitance			167			
C_{rss}	Reverse Transfer Capacitance			75.5			
$T_{d(on)}$	Turn-On Time	$V_{DS}=-10V$ $I_D=-3.7A$ $V_{GEN}=-4.5V$ $R_G=1\Omega$		712		nS	
T_r				1386			
$T_{d(off)}$	Turn-Off Time			9.1			
T_f				4			

Note: 1. Pulse test: pulse width<=300uS, duty cycle<=2%

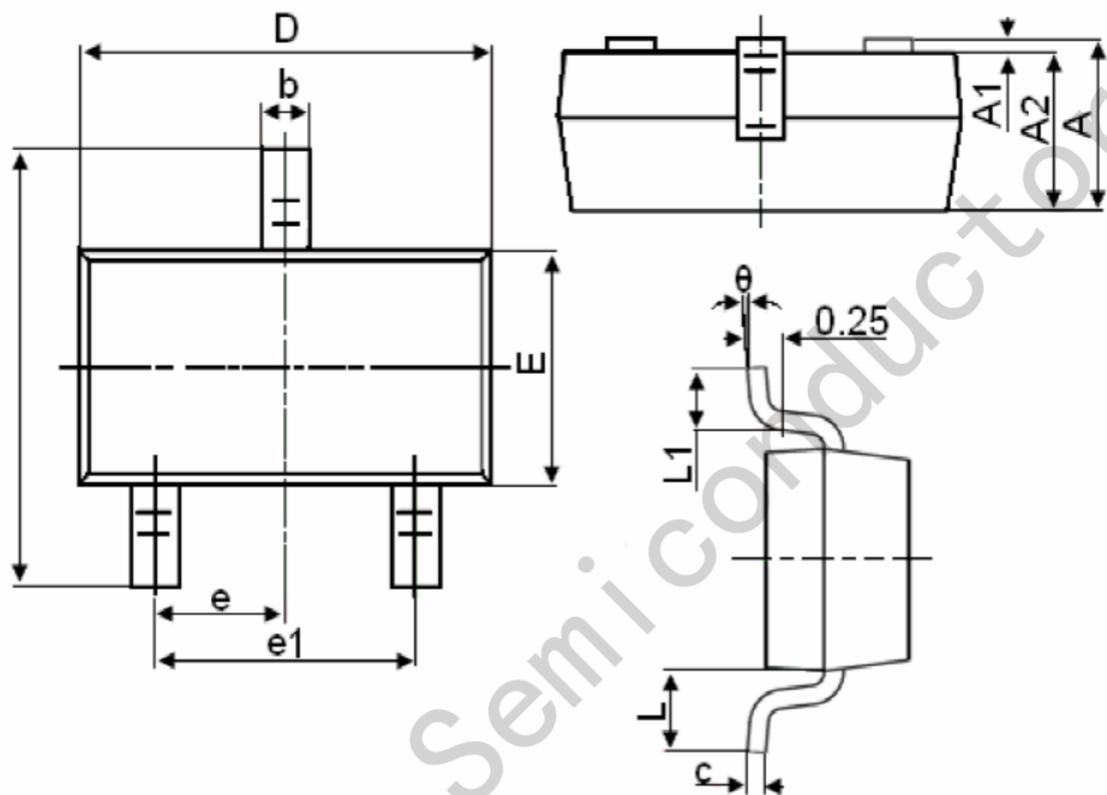
2. Static parameters are based on package level with recommended wire bonding

■ TYPICAL CHARACTERISTICS (25 °C Unless Note)


■ **TYPICAL CHARACTERISTICS (continuous)**


Package Information

SOT-23



Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

单击下面可查看定价，库存，交付和生命周期等信息

[>>JSMSEMI\(杰盛微\)](#)