




# PHD CONNECTOR

## Housing

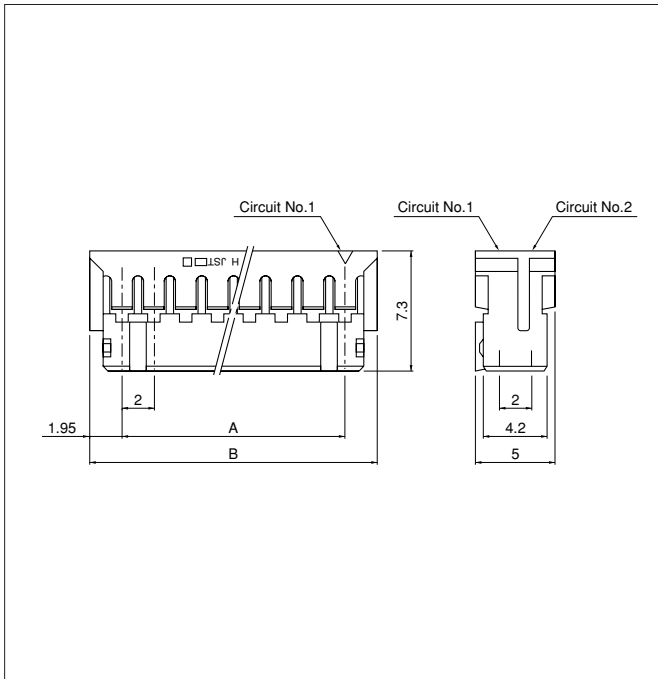

| Circuits | Model No.        | Dimensions (mm) |      | Q'ty / bag |
|----------|------------------|-----------------|------|------------|
|          |                  | A               | B    |            |
| 8        | <b>PHDR-08VS</b> | 6.0             | 9.9  | 1,000      |
| 10       | <b>PHDR-10VS</b> | 8.0             | 11.9 | 1,000      |
| 12       | <b>PHDR-12VS</b> | 10.0            | 13.9 | 1,000      |
| 14       | <b>PHDR-14VS</b> | 12.0            | 15.9 | 1,000      |
| 16       | <b>PHDR-16VS</b> | 14.0            | 17.9 | 1,000      |
| 18       | <b>PHDR-18VS</b> | 16.0            | 19.9 | 1,000      |
| 20       | <b>PHDR-20VS</b> | 18.0            | 21.9 | 1,000      |
| 22       | <b>PHDR-22VS</b> | 20.0            | 23.9 | 1,000      |
| 24       | <b>PHDR-24VS</b> | 22.0            | 25.9 | 1,000      |
| 26       | <b>PHDR-26VS</b> | 24.0            | 27.9 | 1,000      |
| 28       | <b>PHDR-28VS</b> | 26.0            | 29.9 | 1,000      |
| 30       | <b>PHDR-30VS</b> | 28.0            | 31.9 | 1,000      |
| 32       | <b>PHDR-32VS</b> | 30.0            | 33.9 | 1,000      |
| 34       | <b>PHDR-34VS</b> | 32.0            | 35.9 | 1,000      |

### Material

PA 66, UL94V-0, natural (white)

### RoHS compliance

<For reference> As the color identification, the following alphabet shall be put in the underlined part. For availability, delivery and minimum order quantity, contact JST.


ex. **PHDR-10VS**

S...natural (white)


K...black Y...yellow E...blue R...red

## Shrouded header

### Top entry type

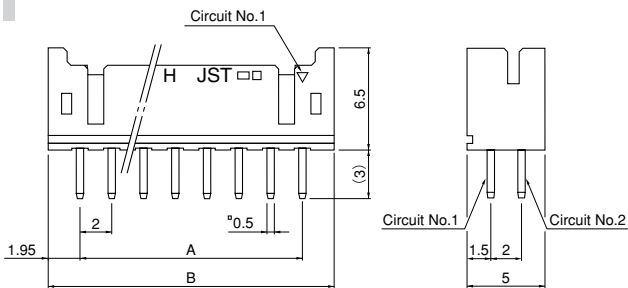

### Side entry type

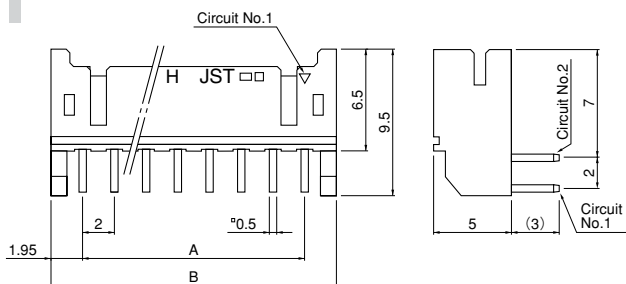

| Circuits | Model No.          |                   |                     |                     | Dimensions (mm) |      | Q'ty / box     |                 |
|----------|--------------------|-------------------|---------------------|---------------------|-----------------|------|----------------|-----------------|
|          | Glass-filled nylon |                   | Nylon               |                     | A               | B    | Top entry type | Side entry type |
|          | Top entry type     | Side entry type   | Top entry type      | Side entry type     |                 |      |                |                 |
| 8        | <b>B8B-PHDSS</b>   | <b>S8B-PHDSS</b>  | —                   | —                   | 6.0             | 9.9  | 500            | 500             |
| 10       | <b>B10B-PHDSS</b>  | <b>S10B-PHDSS</b> | <b>B10B-PHDSS-B</b> | <b>S10B-PHDSS-B</b> | 8.0             | 11.9 | 500            | 500             |
| 12       | <b>B12B-PHDSS</b>  | <b>S12B-PHDSS</b> | <b>B12B-PHDSS-B</b> | <b>S12B-PHDSS-B</b> | 10.0            | 13.9 | 500            | 500             |
| 14       | <b>B14B-PHDSS</b>  | <b>S14B-PHDSS</b> | <b>B14B-PHDSS-B</b> | <b>S14B-PHDSS-B</b> | 12.0            | 15.9 | 500            | 250             |
| 16       | <b>B16B-PHDSS</b>  | <b>S16B-PHDSS</b> | <b>B16B-PHDSS-B</b> | <b>S16B-PHDSS-B</b> | 14.0            | 17.9 | 500            | 250             |
| 18       | <b>B18B-PHDSS</b>  | <b>S18B-PHDSS</b> | <b>B18B-PHDSS-B</b> | <b>S18B-PHDSS-B</b> | 16.0            | 19.9 | 500            | 250             |
| 20       | <b>B20B-PHDSS</b>  | <b>S20B-PHDSS</b> | <b>B20B-PHDSS-B</b> | <b>S20B-PHDSS-B</b> | 18.0            | 21.9 | 250            | 250             |
| 22       | <b>B22B-PHDSS</b>  | <b>S22B-PHDSS</b> | <b>B22B-PHDSS-B</b> | <b>S22B-PHDSS-B</b> | 20.0            | 23.9 | 250            | 250             |
| 24       | <b>B24B-PHDSS</b>  | <b>S24B-PHDSS</b> | <b>B24B-PHDSS-B</b> | <b>S24B-PHDSS-B</b> | 22.0            | 25.9 | 250            | 200             |
| 26       | <b>B26B-PHDSS</b>  | <b>S26B-PHDSS</b> | <b>B26B-PHDSS-B</b> | <b>S26B-PHDSS-B</b> | 24.0            | 27.9 | 250            | 200             |
| 28       | <b>B28B-PHDSS</b>  | <b>S28B-PHDSS</b> | <b>B28B-PHDSS-B</b> | <b>S28B-PHDSS-B</b> | 26.0            | 29.9 | 250            | 200             |
| 30       | <b>B30B-PHDSS</b>  | <b>S30B-PHDSS</b> | <b>B30B-PHDSS-B</b> | <b>S30B-PHDSS-B</b> | 28.0            | 31.9 | 250            | 200             |
| 32       | <b>B32B-PHDSS</b>  | <b>S32B-PHDSS</b> | <b>B32B-PHDSS-B</b> | <b>S32B-PHDSS-B</b> | 30.0            | 33.9 | 250            | 200             |
| 34       | <b>B34B-PHDSS</b>  | <b>S34B-PHDSS</b> | <b>B34B-PHDSS-B</b> | <b>S34B-PHDSS-B</b> | 32.0            | 35.9 | 250            | 200             |

### Material and Finish

Post: Copper alloy, copper-undercoated, tin-plated (reflow treatment)

Wafer: Glass-filled PA 66, UL94V-0, natural (ivory)

PA 66, UL94V-0, natural (white)

**RoHS compliance** This product displays (LF)(SN) on a label.

<For reference> As the color identification, the following alphabet shall be put in the underlined part. For availability, delivery and minimum order quantity, contact JST.

ex. **B10B-PHDSS**

S...natural (ivory)

ex. **B10B-PHDSS-B**

S...natural (white)

K...black Y...yellow E...blue R...red

单击下面可查看定价，库存，交付和生命周期等信息

[>>JST\(杰世腾\)](#)