
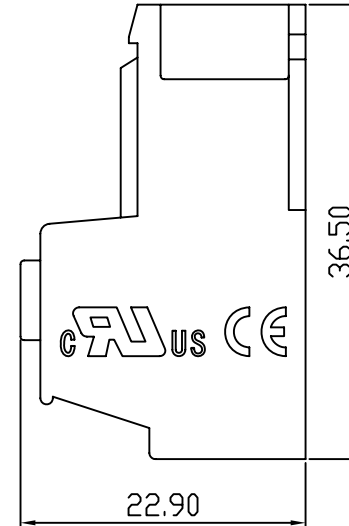
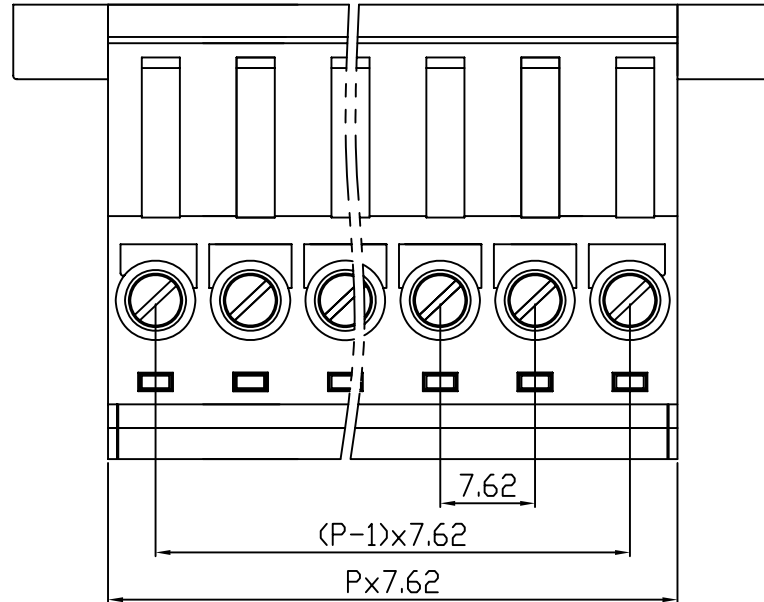
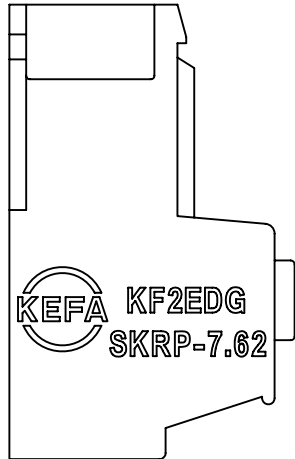


linear dimension(Tolerances Standard GB/T 14486-2008)							—	$\square$	$\perp$	
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.08.31

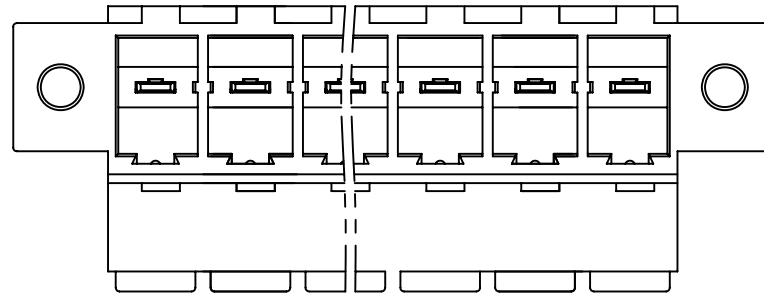

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group		B	C D
额定电压 Rated Voltage [V]		600	600 600
额定电流 Rated Current [A]		41	41 5
接线范围 Wire Range		24-8	
单/多芯线 Solid/Stranded [AWG]			
耐电压 Withstanding Voltage		2200V/1Min	
IEC 技术参数 IEC Technical Data			
过电压类别 Overvoltage Category		III	III II
污染等级 Contamination Class		3	2 2
额定电压 Rated Voltage [V]		-	1000 1000
额定电流 Rated Current [A]		-	41 41
额定冲击电压 Impulse withstand voltage <sup>a</sup> [KV]		-	8.0 6.0
导线截面积 Conductor cross section		6.0	
硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ]			
材料 Material			
绝缘材料 Insulation Material		PA66	
阻燃等级 Imflammability		UL94V-0	
导体材料 Contactor Material		铜合金 Copper alloy	
导体表面镀层 Contactive Coating		镀锡 Tin Plated	
一般参数 Other Data			
间距 Pitch [mm]		7.62	
极数 Poles [P]		2-16	
剥线长度 Stripping Length [mm]		7-8	
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5	
工作温度 Operating temperatur [°C]		-40~+105	
引针尺寸 Pin Dimensions [mm]		-	
PCB板孔径 PCB Hole Diameter [mm]		-	

DES.	LQQ	DATE	21.08.31
CHK.	BY	DATE	21.08.31
APP.	CLF	DATE	21.08.31

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD					

第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
名称 / TITLE	KF2EDGSKRP-7.62	

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)