
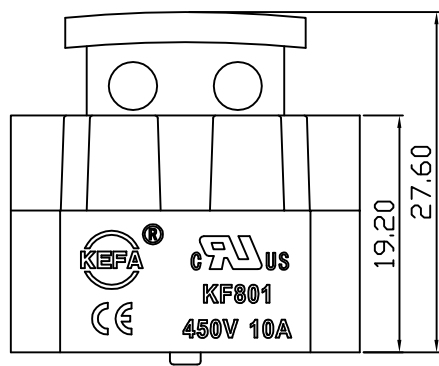
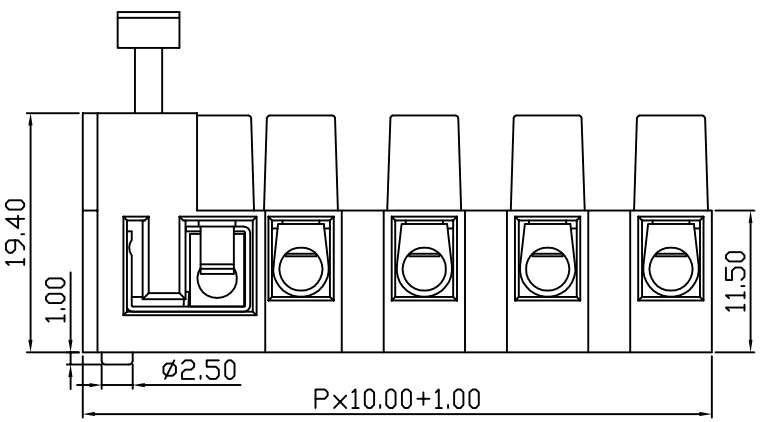
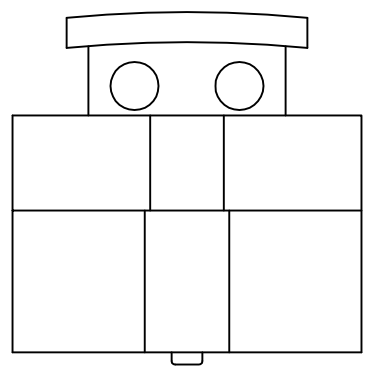


linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	\perp
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.05.13

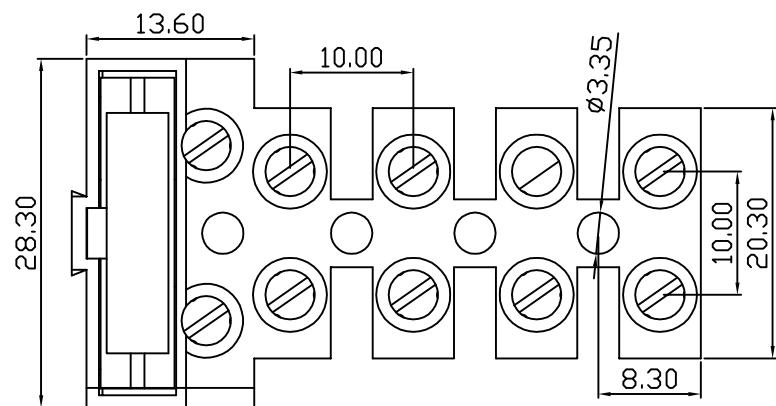

UL/CUL 技术参数 UL/CUL Technical Data				cULus		
等级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	-	-		
额定电流	Rated Current [A]	20	-	-		
接线范围	Wire Range	22-12				
单/多芯线	Solid/Stranded [AWG]					
IEC 技术参数 IEC Technical Data				DVE		
额定电压	Rated Voltage [V]	250				
额定电流	Rated Current [A]	10				
耐电压	Withstanding Voltage	1600V/1Min				
导线截面积	Conductor cross section	2.5				
硬质/柔性导线	Solid/flexible [mm ²]					
材料				Material		
绝缘材料	Insulation Material	PA66				
阻燃等级	Inflammability	UL94V-0				
导体材料	Contacting Material	铜合金 Copper alloy/锌合金 Zinc alloy				
导体表面镀层	Contactive Coating	镀镍 Ni plating				
一般参数				Other Data		
间距	Pitch [mm]	10.0				
极数	Poles [P]	2, 3, 4, 5, 6				
剥线长度	Stripping Length [mm]	6-7				
螺丝	Screw/扭矩 Torque(Max) [N.m]	M3/0.5				
工作温度	Operating temperatur [°C]	-40~+105				
引针尺寸	Pin Dimensions [mm]	-				
PCB板孔径	PCB Hole Diameter [mm]	-				

DES.	LQQ	DATE	22.05.13	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	BY	DATE	22.05.13	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD						名称/TITLE	KF801	
APP.	CLF	DATE	22.05.13					名称/TITLE	KF801			

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)