


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over	over	over	over	over	over	to	to	to
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.10.16

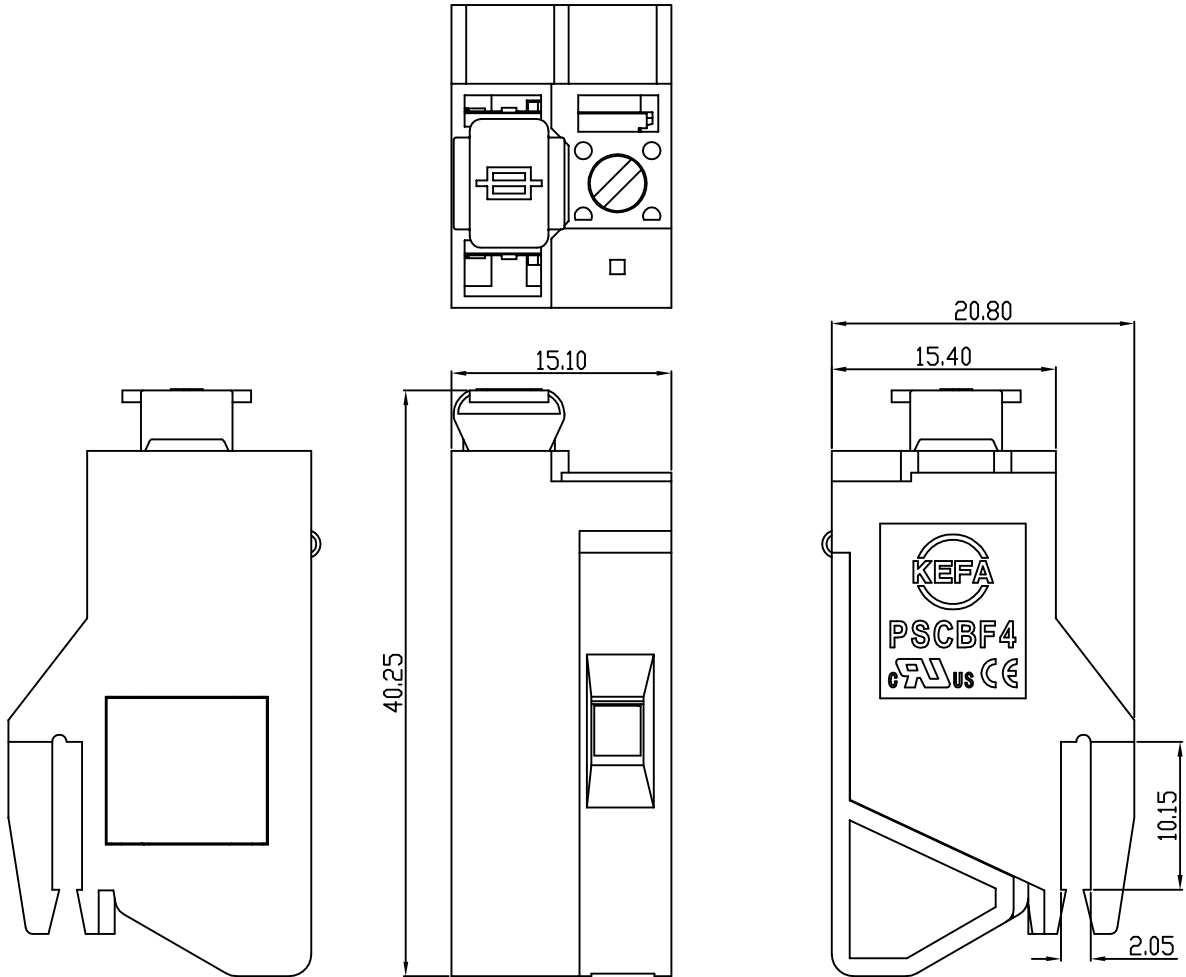

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage [V]		250	-	-
额定电流	Rated Current [A]		6.3	-	-
接线范围	Wire Range		20-14		
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage [V]		250		
额定电流	Rated Current [A]		6.3		
耐电压	Withstanding Voltage		2000V/1Min		
导线截面积	Conductor cross section		2.5		
硬质/柔性导线	Solid/flexible [mm ²]				
材料 Material					
绝缘材料	Insulation Material		PA66		
阻燃等级	Imflammability		UL94V-0		
导体材料	Contacting Material		铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀锡 Tin plating		
一般参数 Other Data					
间距	Pitch [mm]		15.1		
极数	Poles [P]		1		
剥线长度	Stripping Length [mm]		8-10		
螺丝	Screw/扭矩 Torque(Max) [N.m]		M3/0.5		
工作温度	Operating temperatur [°C]		-40~+105		
引针尺寸	Pin Dimensions [mm]		-		
PCB板孔径	PCB Hole Diameter [mm]		-		

DES.	SJD	DATE	21.10.16	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	BY	DATE	21.10.16	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD				名称/TITLE	PSCBF4-15.1			
APP.	CLF	DATE	21.10.16									

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)