
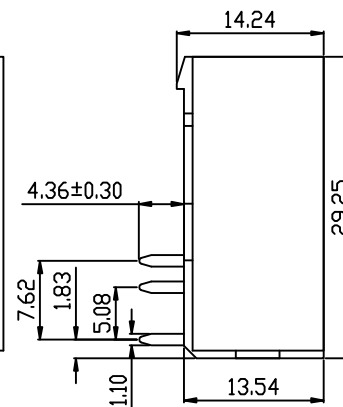
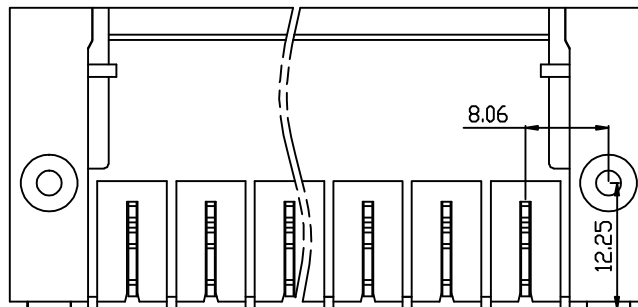

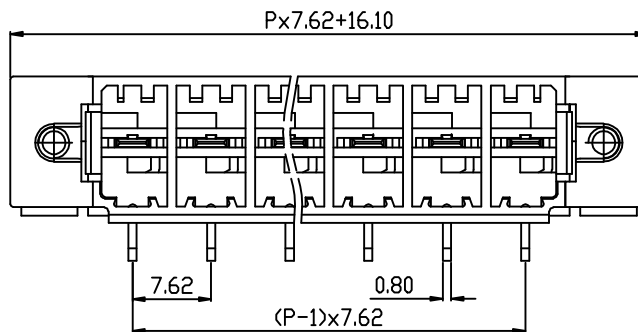


| linear dimension(Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     |                |             |
|-------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range                                        | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance                                             | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

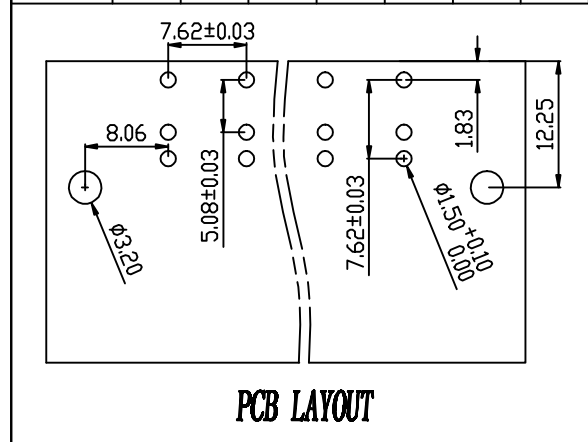

| REVISION RECORD |             |         |          |          |
|-----------------|-------------|---------|----------|----------|
| REV.            | DESCRIPTION | ECN No. | APPROVED | DATE     |
| A               | 新发行         |         | CLF      | 21.05.12 |
|                 |             |         |          |          |
|                 |             |         |          |          |
|                 |             |         |          |          |

| UL/CUL 技术参数           |                           |       |                                                                                     |     |      |
|-----------------------|---------------------------|-------|-------------------------------------------------------------------------------------|-----|------|
| UL/CUL Technical Data |                           |       |  |     |      |
| 等级                    | Use Group                 |       | B                                                                                   | C   | D    |
| 额定电压                  | Rated Voltage             | [V]   | 300                                                                                 | -   | 300  |
| 额定电流                  | Rated Current             | [A]   | 41                                                                                  | -   | 10   |
| 接线范围                  | Wire Range                |       | -                                                                                   |     |      |
| 单/多芯线                 | Solid/Stranded            | [AWG] |                                                                                     |     |      |
| 耐电压                   | Withstanding Voltage      |       | 1800V/1Min                                                                          |     |      |
| IEC 技术参数              |                           |       |  |     |      |
| IEC Technical Data    |                           |       |                                                                                     |     |      |
| 过电压类别                 | Overvoltage Category      |       | III                                                                                 | III | II   |
| 污染等级                  | Contamination Class       |       | 3                                                                                   | 2   | 2    |
| 额定电压                  | Rated Voltage             | [V]   | -                                                                                   | 630 | 1000 |
| 额定电流                  | Rated Current             | [A]   | -                                                                                   | 41  | 41   |
| 额定冲击电压                | Impulse withstand voltage | [KV]  | -                                                                                   | 6.0 | 6.0  |
| 导线横面积                 | Conductor cross section   |       | -                                                                                   |     |      |
| 硬质/柔性导线               | Solid/flexible            | [mm²] |                                                                                     |     |      |
| 材料                    |                           |       |                                                                                     |     |      |
| 绝缘材料                  | Insulation Material       |       | PA66                                                                                |     |      |
| 阻燃等级                  | Inflammability            |       | UL94V-0                                                                             |     |      |
| 导体材料                  | Conductor Material        |       | 铜合金 Copper alloy                                                                    |     |      |
| 导体表面镀层                | Contactive Coating        |       | 镀锡 Tin plated                                                                       |     |      |
| 一般参数                  |                           |       |                                                                                     |     |      |
| 间距                    | Pitch                     | [mm]  | 7.62                                                                                |     |      |
| 极数                    | Poles                     | [P]   | 2-16                                                                                |     |      |
| 剥线长度                  | Stripping Length          | [mm]  | -                                                                                   |     |      |
| 螺丝                    | Screw/扭矩 Torque(Max)      | [N.m] | -                                                                                   |     |      |
| 工作温度                  | Operating temperatur      | [°C]  | -40~+105                                                                            |     |      |
| 引脚尺寸                  | Pin Dimensions            | [mm]  | 4.36                                                                                |     |      |
| PCB板孔径                | PCB Hole Diameter         | [mm]  | 1.5                                                                                 |     |      |

|      |     |      |          |                                                                                                                                               |    |         |    |          |     |                             |                 |   |
|------|-----|------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------|----|---------|----|----------|-----|-----------------------------|-----------------|---|
| DES. | LQQ | DATE | 21.05.12 | 单位/UNITS                                                                                                                                      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 版本/REV          | A |
| CHK. | SY  | DATE | 21.05.12 | <div>慈溪市科发电子有限公司<br/>CIXI KEFA ELECTRONIC CO., LTD</div> |    |         |    |          |     | 名称/TITLE                    | KF2EDGSTAM-7.62 |   |
| APP. | CLF | DATE | 21.05.12 |                                                                                                                                               |    |         |    |          |     |                             |                 |   |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)