




慈溪市科发电子有限公司


CIXI KEFA ELECTRONICS CO., LTD.

产品规格书

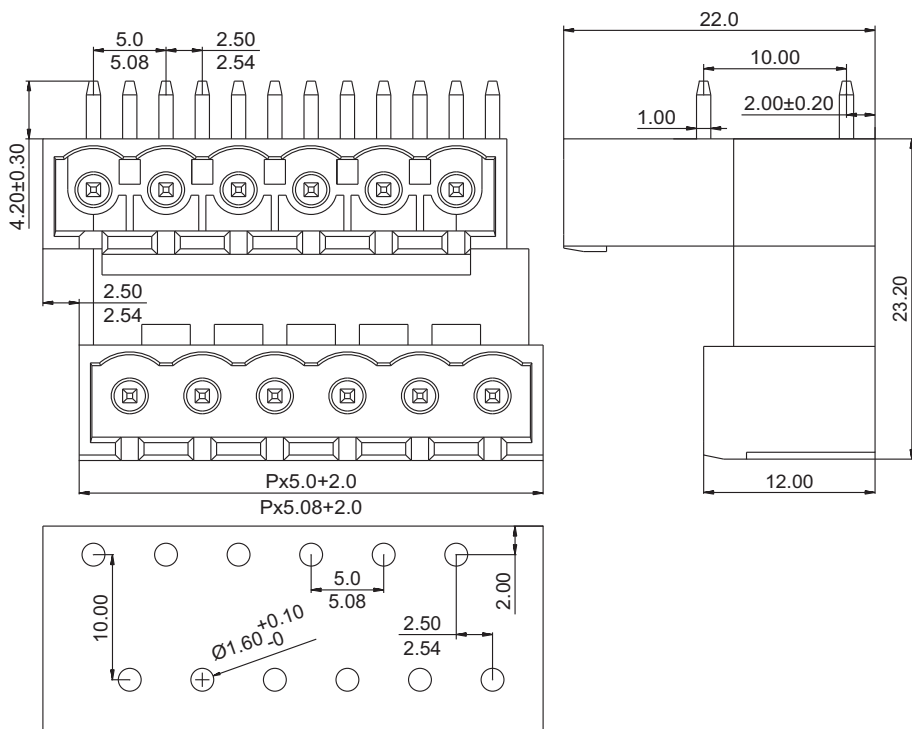

认证	UL CE	
电气性能	UL	IEC
参考标准	300V	300V
额定电压	10A	15A
额定电流	AC2500V/1Min	
耐电压		
机械性能		
温度范围	-40°C—+105°C	
尺寸		
间距	5.0/5.08mm	
极数	2*(2P-24P)	
材质及电镀		
塑体	PA66 UL94V-0	
焊针	黄铜 镀锡	


订购方式:

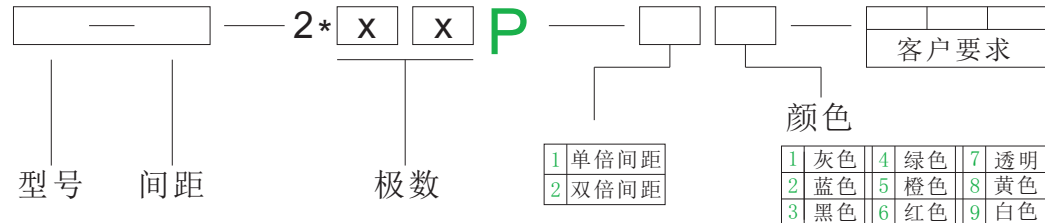

塑胶件一般尺寸公差对照表

linear dimension (Tolerances Standard GB/T 14486-2008)											
variable range	0 to 10	over 10 to 20	over 20 to 30	over 30 to 40	over 40 to 50	over 50 to 70	over 70 to 90	over 90 to 110	over 110 to 130	over 130 to 150	over 150 to
tolerance	±0.20	±0.25	±0.30	±0.40	±0.50	±0.60	±0.80	±1.00	±1.20	±1.30	±1.50

Downloaded From Oneyac.com



KEFA 慈溪市科发电子有限公司
CIXI KEFA ELECTRONICS CO., LTD.

NAME KF2EDGRTC-5.0/5.08

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)