
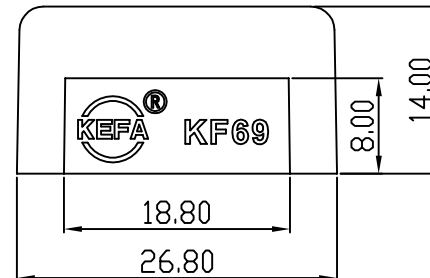
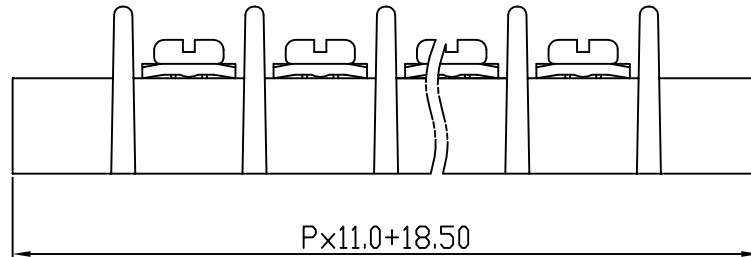



linear dimension(Tolerances Standard GB/T 14486-2008)								—	$\nabla$	$\perp$
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

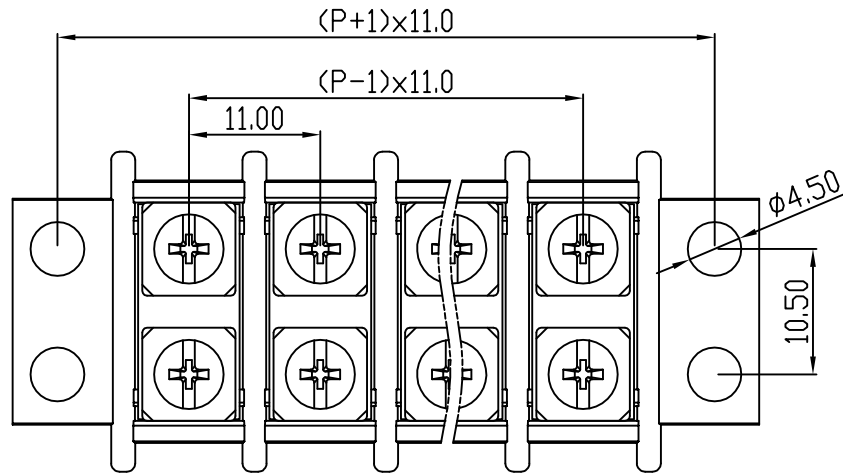

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.04.14

UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	750	-	-	
额定电流	Rated Current [A]	25	-	-	
接线范围	Wire Range				22-12
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数		IEC Technical Data			
额定电压	Rated Voltage [V]	750			
额定电流	Rated Current [A]	32			
耐电压	Withstanding Voltage	3000V/1Min			
导线截面积	Conductor cross section	4			
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]				
材料		Material			
绝缘材料	Insulation Material	PBT			
阻燃等级	Inflammability	UL94V-0			
导体材料	Contacting Material	铁合金 ferroalloy			
导体表面镀层	Contactive Coating	镀镍 Ni plating			
一般参数		Other Data			
间距	Pitch [mm]	11.0			
极数	Poles [P]	2-24			
剥线长度	Stripping Length [mm]	-			
螺丝	Screw/扭矩 Torque(Max) [N.m]	M4/1.0			
工作温度	Operating temperatur [°C]	-40~+105			
引针尺寸	Pin Dimensions [mm]	-			
PCB板孔径	PCB Hole Diameter [mm]	-			

DES.	SJD	DATE	21.04.14	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	SY	DATE	21.04.14	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD				名称/TITLE	KF69-11.0			
APP.	CLF	DATE	21.04.14									

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)