
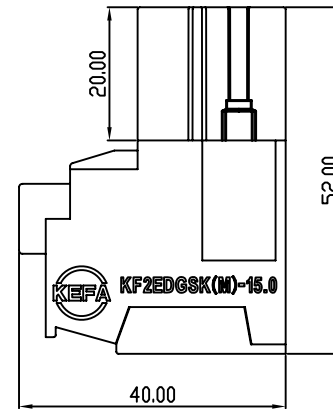
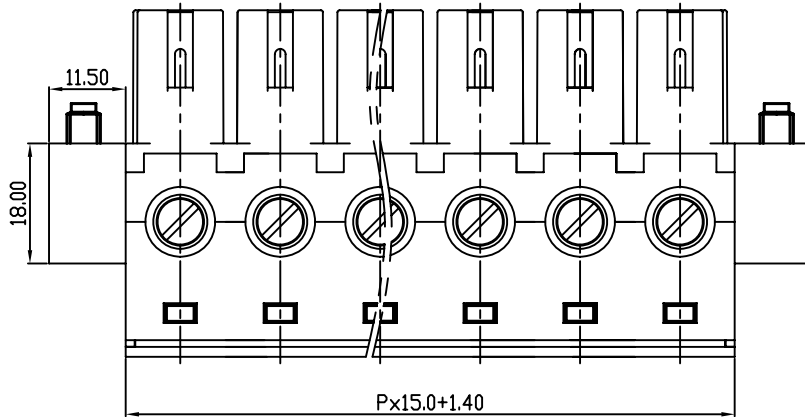
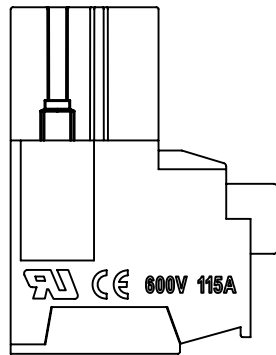


linear dimension(Tolerances Standard GB/T 14486-2008)							— ▯ ⊥			
variable range	to	over	over	over	over	over	to	over	over	
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160		10 to 100	10 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.15

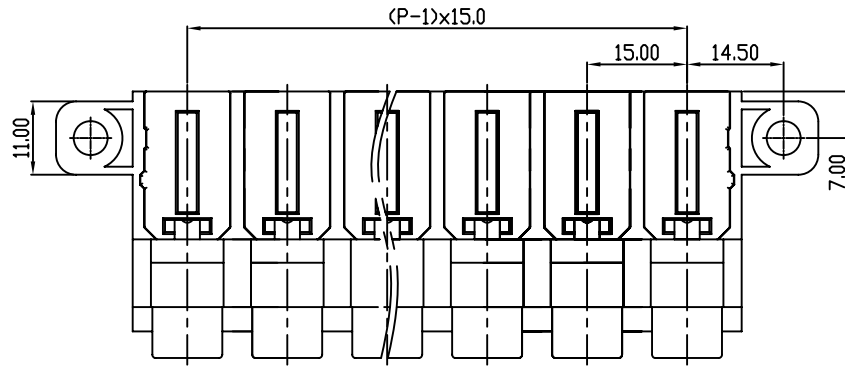

UL/CUL 技术参数			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage [V]	600	600 600
额定电流	Rated Current [A]	115	115 5
接线范围	Wire Range	20-2	
单/多芯线	Solid/Stranded [AWG]	20-2	
耐电压	Withstanding Voltage	2200V/1Min	
IEC 技术参数			
IEC Technical Data			
过电压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	-	2 2
额定电压	Rated Voltage [V]	-	1000 1000
额定电流	Rated Current [A]	-	125 125
额定冲击电压	Impulse withstand voltagea [KV]	-	8.0 6.0
导线截面积	Conductor cross section	35.0	
硬质/柔性导线	Solid/ flexible [mm²]	35.0	
材料 Material			
绝缘材料	Insulation Material	PA66	
阻燃等级	Imflammability	UL94V-0	
导体材料	Contactive Material	铜合金 Copper alloy	
导体表面镀层	Contactive Coating	镀镍 Ni plated	
一般参数 Other Data			
间距	Pitch [mm]	15.0	
极数	Poles [P]	2-10	
剥线长度	Stripping Length [mm]	19-20	
螺丝	Screw/扭矩 Torque(Max) [N.m]	M5/2.0	
工作温度	Operating temperatur [°C]	-40~+105	
引针尺寸	Pin Dimensions [mm]	-	
PCB板孔径	PCB Hole Diameter [mm]	-	

DES.	FZM	DATE	21.03.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	SY	DATE	21.03.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD				名称 / TITLE	KF2EDGSKM-15.0			
APP.	CLF	DATE	21.03.15									

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEFA\(科发\)](#)