


TSP, Tantalum, Polymer Tantalum, HRA, 8,000 uF, 20%, 3 VDC, 4O

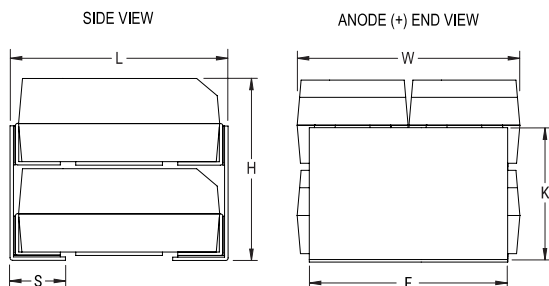

General Information	
Series:	TSP
Dielectric:	Polymer Tantalum
Style:	Stacked Chip
Description:	SMD, Polymer, KO, Stacks, High Reliability
Features:	High Reliability
RoHS:	Yes
Termination:	Tin
Termination (Stack):	Solder Coated
AEC-Q200:	No

Dimensions	
Case Code	4O
L	7.9mm +/-0.38mm
W	12.2mm +/-0.4mm
H	8.9mm +/-0.38mm
S	1.4mm +/-0.38mm
F	10.5mm +/-0.4mm
K	6.6mm +/-0.38mm

Specifications	
Capacitance:	8,000 uF
Capacitance Tolerance:	20%
Voltage DC:	3 VDC (105C), 2 VDC (125C)
Temperature Range:	-55/+125°C
Rated Temperature:	105°C
Dissipation Factor:	10% 120Hz 25C
Failure Rate:	N/A
Resistance:	5 mOhms (100kHz 25C)
Leakage Current:	2400 uA (5min 25°C)

Packaging Specifications	
Packaging:	T&R, 178mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)