


**KEMET Part Number: CA064X221J5GACTU**  
(CA064X221J5GAC7800)

Array Comm COG Flex, Ceramic, 220 pF, 5%, 50 VDC, COG, SMD, MLCC, Array, Flex Termination, Class II, 0612

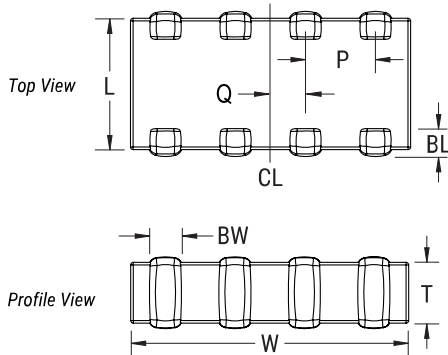

Dimensions	
<b>L</b>	1.6mm +/-0.2mm
<b>W</b>	3.2mm +/-0.2mm
<b>T</b>	0.8mm +/-0.10mm
<b>P</b>	0.8mm +/-0.10mm

Packaging Specifications	
<b>Packaging:</b>	T&R, 180mm, Paper Tape
<b>Packaging Quantity:</b>	4000

General Information	
<b>Series:</b>	Array Comm COG Flex
<b>Style:</b>	SMD Array
<b>Description:</b>	SMD, MLCC, Array, Flex Termination, Class II
<b>RoHS:</b>	Yes
<b>Termination:</b>	Flexible Termination
<b>AEC-Q200:</b>	No
<b>Miscellaneous:</b>	Note: KEMET 50V rated parts may be operated at 63 Volts.
<b>Chip Size:</b>	0612
<b>Shelf Life:</b>	78 Weeks
<b>MSL:</b>	1

Specifications	
<b>Capacitance:</b>	220 pF
<b>Capacitance Tolerance:</b>	5%
<b>Voltage DC:</b>	50 VDC
<b>Dielectric Withstanding Voltage:</b>	125 VDC
<b>Temperature Range:</b>	-55/+125°C
<b>Temperature Coefficient:</b>	COG
<b>Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):</b>	30 ppm/C, 1MegaHz 1.0Vrms
<b>Dissipation Factor:</b>	0.1% 1 MHz 1.0Vrms
<b>Aging Rate:</b>	0% Loss/Decade Hour
<b>Insulation Resistance:</b>	100 GOhms

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)