


HV RAD-LDD Indust X7R HVHT200C, Ceramic, 0.027 uF, 10%, 3000 VDC, X7R, Commercial, High Voltage, Lead Spacing = 17.78mm

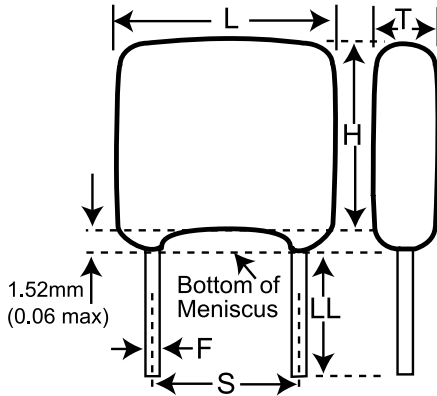

| Dimensions | |
|------------|-------------------------|
| L | 20.83mm NOM |
| H | 17.78mm NOM |
| T | 8.89mm NOM |
| S | 17.78mm NOM |
| LL | 3.175mm MIN |
| F | 0.635mm +0.102/-0.051mm |

| Packaging Specifications | |
|--------------------------|--------------|
| Packaging: | Waffle, Tray |
| Packaging Quantity: | 20 |

| General Information | |
|---------------------|---|
| Series: | HV RAD-LDD Indust X7R HVHT200C |
| Style: | Radial |
| Description: | Commercial, High Voltage |
| Features: | Commercial |
| RoHS: | No |
| Prop 65: | WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov . |
| Termination: | Copper |
| Failure Rate: | N/A |
| AEC-Q200: | No |

| Specifications | |
|---|---------------------|
| Capacitance: | 0.027 uF |
| Capacitance Tolerance: | 10% |
| Voltage DC: | 3000 VDC |
| Dielectric Withstanding Voltage: | 3600 VDC |
| Temperature Range: | -55/+200°C |
| Temperature Coefficient: | X7R |
| Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC): | +15%/-40% |
| Dissipation Factor: | 2% |
| Aging Rate: | 2% Loss/Decade Hour |
| Insulation Resistance: | 10 GOhms |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)