


C4BT, Film, Metallized Polypropylene, Power, 40 uF, 5%, 250 VDC, 70°C, Lead Spacing = 41mm

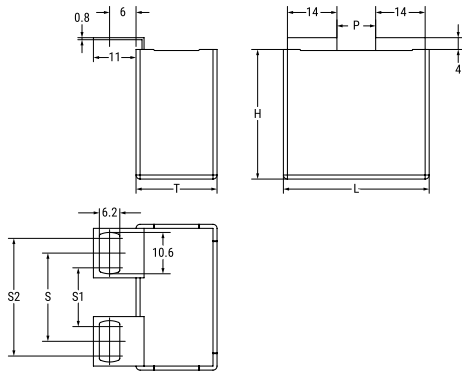

General Information	
Series:	C4BT
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	Switching
RoHS:	Yes
Lead:	Flat Tabs
AEC-Q200:	No
Miscellaneous:	KEMET Style M Tabs. Peak Voltage = 600 VDC.

Dimensions	
L	57.5mm +1.2/-0.7mm
H	45mm +0.3/-0.7mm
T	30mm +0.5/-0.7mm
S	41mm +/-0.2mm
S1	37mm +/-0.2mm
S2	45mm +/-0.2mm
P	25mm NOM

Specifications	
Capacitance:	40 uF
Capacitance Tolerance:	5%
Voltage DC:	250 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	70°C
Max dV/dt:	27 V/us
Resistance:	1.5 mOhms (100kHz)
Ripple Current:	46 Amps (100kHz 70C), 1082 Amps (Peak)
Inductance:	45 nH

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	24

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)