


ESD-R-25B

Aliases (UECESDR25B0000)

KEMET, ESD-R-B, EMI Cores, Noise Suppression

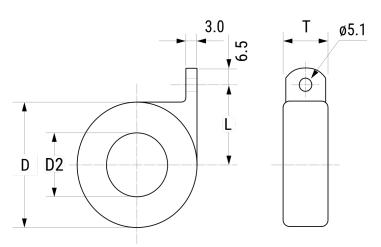

Click here for the 3D model.

Dimensions	
D	29.3mm +/-1.0mm
D2	13.9mm +/-1.0mm
L	23mm +/-1.0mm
Т	15mm MAX

Packaging Specifications		
Packaging	Tray, Box	
Packaging Quantity	300	
Component Weight	21.8 g	

General Information		
Series	ESD-R-B	
Style	Round - Snail	
Cable Type	Round Cable	
Description	EMI Core Solid, For Round Cables, Toroidal Cores	
Features	Snail Shaped Case	
RoHS	Yes	
Qualifications	UL94 V-2	
Case Color	White	
Toroidal	ESD-R-25S	
Materials	Mn-Zn	

Specifications	
Temperature Range	-25/+60°C
Effective Frequency	10 MHz (AM Band Range)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)