


FLLE2016AUMB

Aliases (LLE2016AUMB)

KEMET, FLLE2-U, EMI/RFI Filters, Noise Suppression, 300 VAC, 300 V, 16 A, 130.5x56.5x48.5mm

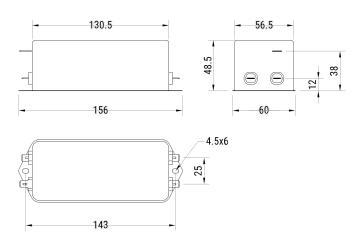

Dimensions		

130.5mm MIN

W 56.5mm MIN H 48.5mm MIN

Click here for the 3D model.

L

Packaging Specifications	
Packaging	Bulk
Packaging Quantity	1
Component Weight	700 g

FLLE2-U
Chassis Mount
Single Phase, Chassis Mount Filters
Single Phase, Medical
Single-phase
Yes
IEC/EN 60939, UL, CSA
Faston

Specifications	
Voltage AC	300 VAC
Voltage DC	300 VDC
Rated Frequency	50-60 Hz
Rated Current	16 A
Rated Temperature	40°C
Temperature Range	-25/+100°C
Climate Category	25/100/21
Leakage Current	0.86 mA (MAX)
Test Voltage DC (P/N to E)	2250 VDC
Test Voltage DC (P to N)	1300 VDC

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)