


ARA16D103KWS

ARA Indust X7R HT200C, Ceramic, 0.01 uF, 10%, 100 VDC, X7R, ARA Indust X7R HT200C with C3 Technology, Axial

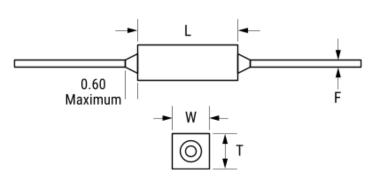

General Information			
Series	ARA Indust X7R HT200C		
Description	ARA Indust X7R HT200C with C3 Technology, Axial		
Features	High Temperature		
RoHS	No		
Prop 65	▲ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov.		
Termination	Lead (SnPb)		
AEC-Q200	No		
Shelf Life	72 Weeks		

Specifications	
Capacitance	0.01 uF
Capacitance Tolerance	10%
Voltage DC	100 VDC
Dielectric Withstanding Voltage	150 VDC
Temperature Range	-55/+200°C
Temperature Coefficient	X7R
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	15%1kHz 1.0Vrms
Dissipation Factor	2.5% 1 kHz 1.0Vrms
Insulation Resistance	100 GOhms

Dimensions		
L	4.32mm MAX	
W	2.03mm MAX	
Т	2.03mm MAX	
LL	3.175mm MIN	
F	0.508mm +/-0.051mm	

Packaging Specifications	
Packaging	Waffle
Packaging Quantity	25

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价,库存,交付和生命周期等信息

>>KEMET(基美)